

STANDARD DEPARTURE CHART - INSTRUMENT

RJOB / OKAYAMA


RNAV SID

WASYU TWO DEPARTURE

RNP1

Note GNSS required.

VAR 8°W

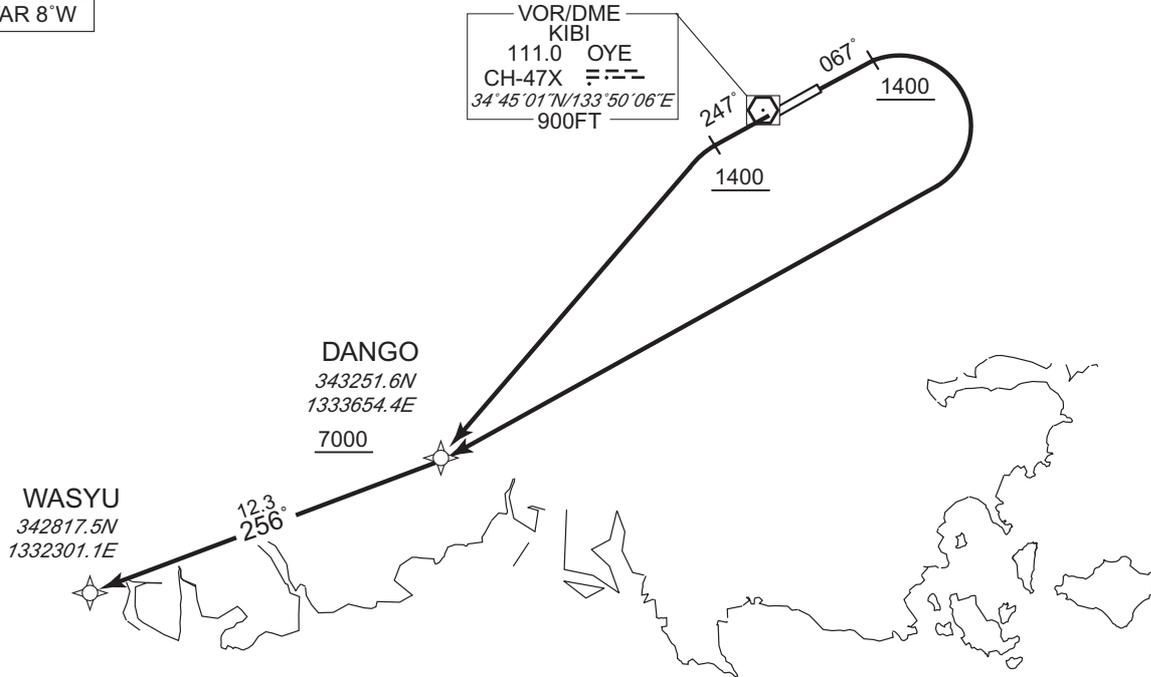

RWY07 : Climb on HDG067° at or above 1400FT, turn right direct to DANGO at or above 7000FT, to WASYU.

RWY25 : Climb on HDG247° at or above 1400FT, turn left direct to DANGO at or above 7000FT, to WASYU.

Note RWY07 : 5.4% climb gradient required up to 2300FT.
OBST ALT 1922FT located at 3.8NM 118° FM end of RWY07.
RWY25 : 4.0% climb gradient required up to 1400FT.
OBST ALT 1018FT located at 1.1NM 227° FM end of RWY25.

RWY07

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	067 (059.1)	-8.1	—	—	+1400	—	—	RNP1
002	DF	DANGO	—	—	-8.1	—	R	+7000	—	—	RNP1
003	TF	WASYU	—	256 (248.3)	-8.1	12.3	—	—	—	—	RNP1

RWY25

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	—	—	247 (239.1)	-8.1	—	—	+1400	—	—	RNP1
002	DF	DANGO	—	—	-8.1	—	L	+7000	—	—	RNP1
003	TF	WASYU	—	256 (248.3)	-8.1	12.3	—	—	—	—	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).