


INSTRUMENT APPROACH CHART - ICAO


AD ELEV 259 ft
HEIGHTS RELATED
THR RWY 30 - ELEV 187 ft

ATIS 123.900
APP 119.400
TWR 118.300

PONTA DELGADA, João Paulo II (LPPD)
ILS-Z or LOC
RWY 30
CAT C-D

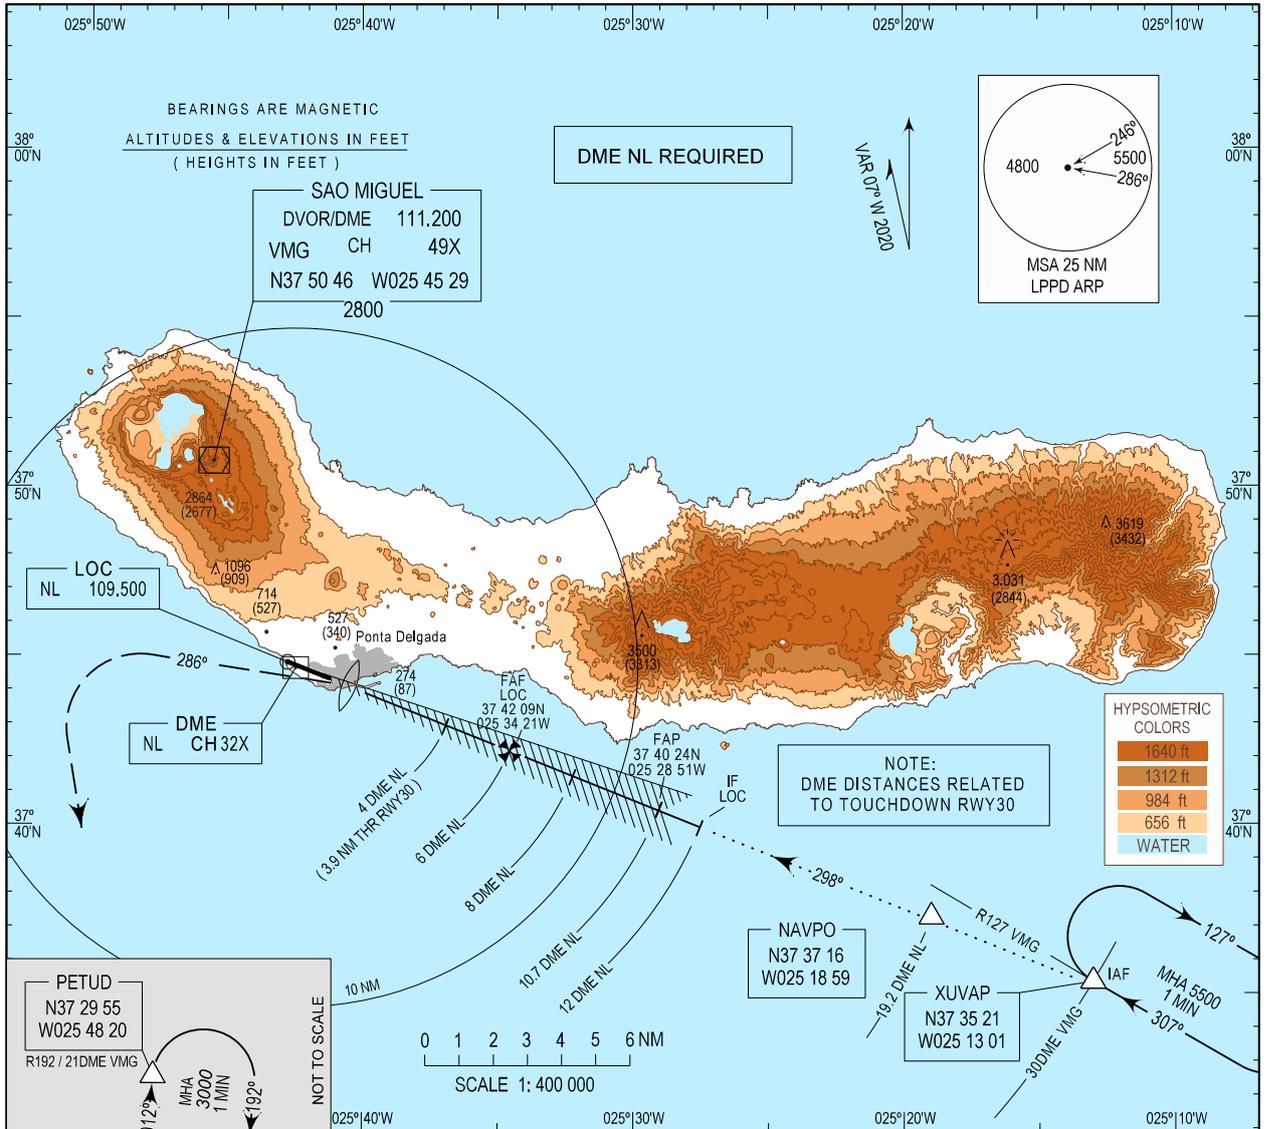

MISSED APPROACH
Turn left climbing on track 286°. Crossing 2000 ft, turn left to PETUD (R192/21DME VMG) climbing to 3000 ft. At PETUD hold or follow ATC instructions.
RCF: Squawk 7600. Proceed as above. On PETUD make one complete holding pattern at 3000 ft. Then proceed to XUVAP (R 127/30DME VMG) climbing to 5500 ft to perform ILS-Z RWY30 approach.
PETUD to XUVAP RNAV1, if unable advise ATC

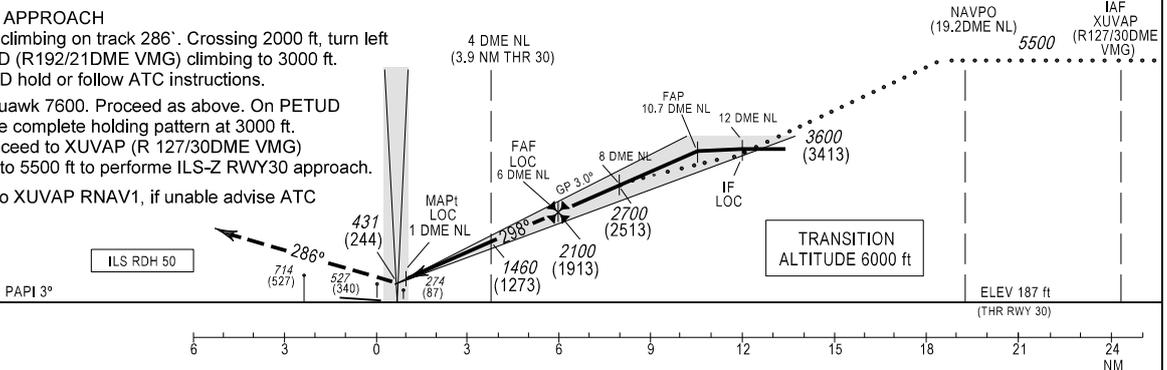

CAT	ILS CAT I		LOC		CIRCLING RWY30	
	DA/H	OCH	MDA/H	OCH	NORTH	SOUTH
C	430 (243)	241	530 (350)	350	NOT AUTHORIZED	850 (591)
D	440 (253)	251	530 (350)	350	NOT AUTHORIZED	950 (691)

LOC 5.2%							
DME-NL	8	7	6	5	4	3	2
Altitude (Height)	2700 (2513)	2400 (2213)	2100 (1913)	1780 (1593)	1460 (1273)	1145 (958)	825 (638)

Rate of descend (5.2%)	ft/min						
	100	120	140	160	180	200	220
	525	630	735	840	945	1050	1160

FAF symbol updated.

THIS PAGE INTENTIONALLY LEFT BLANK