


STANDARD DEPARTURE CHART-INSTRUMENT

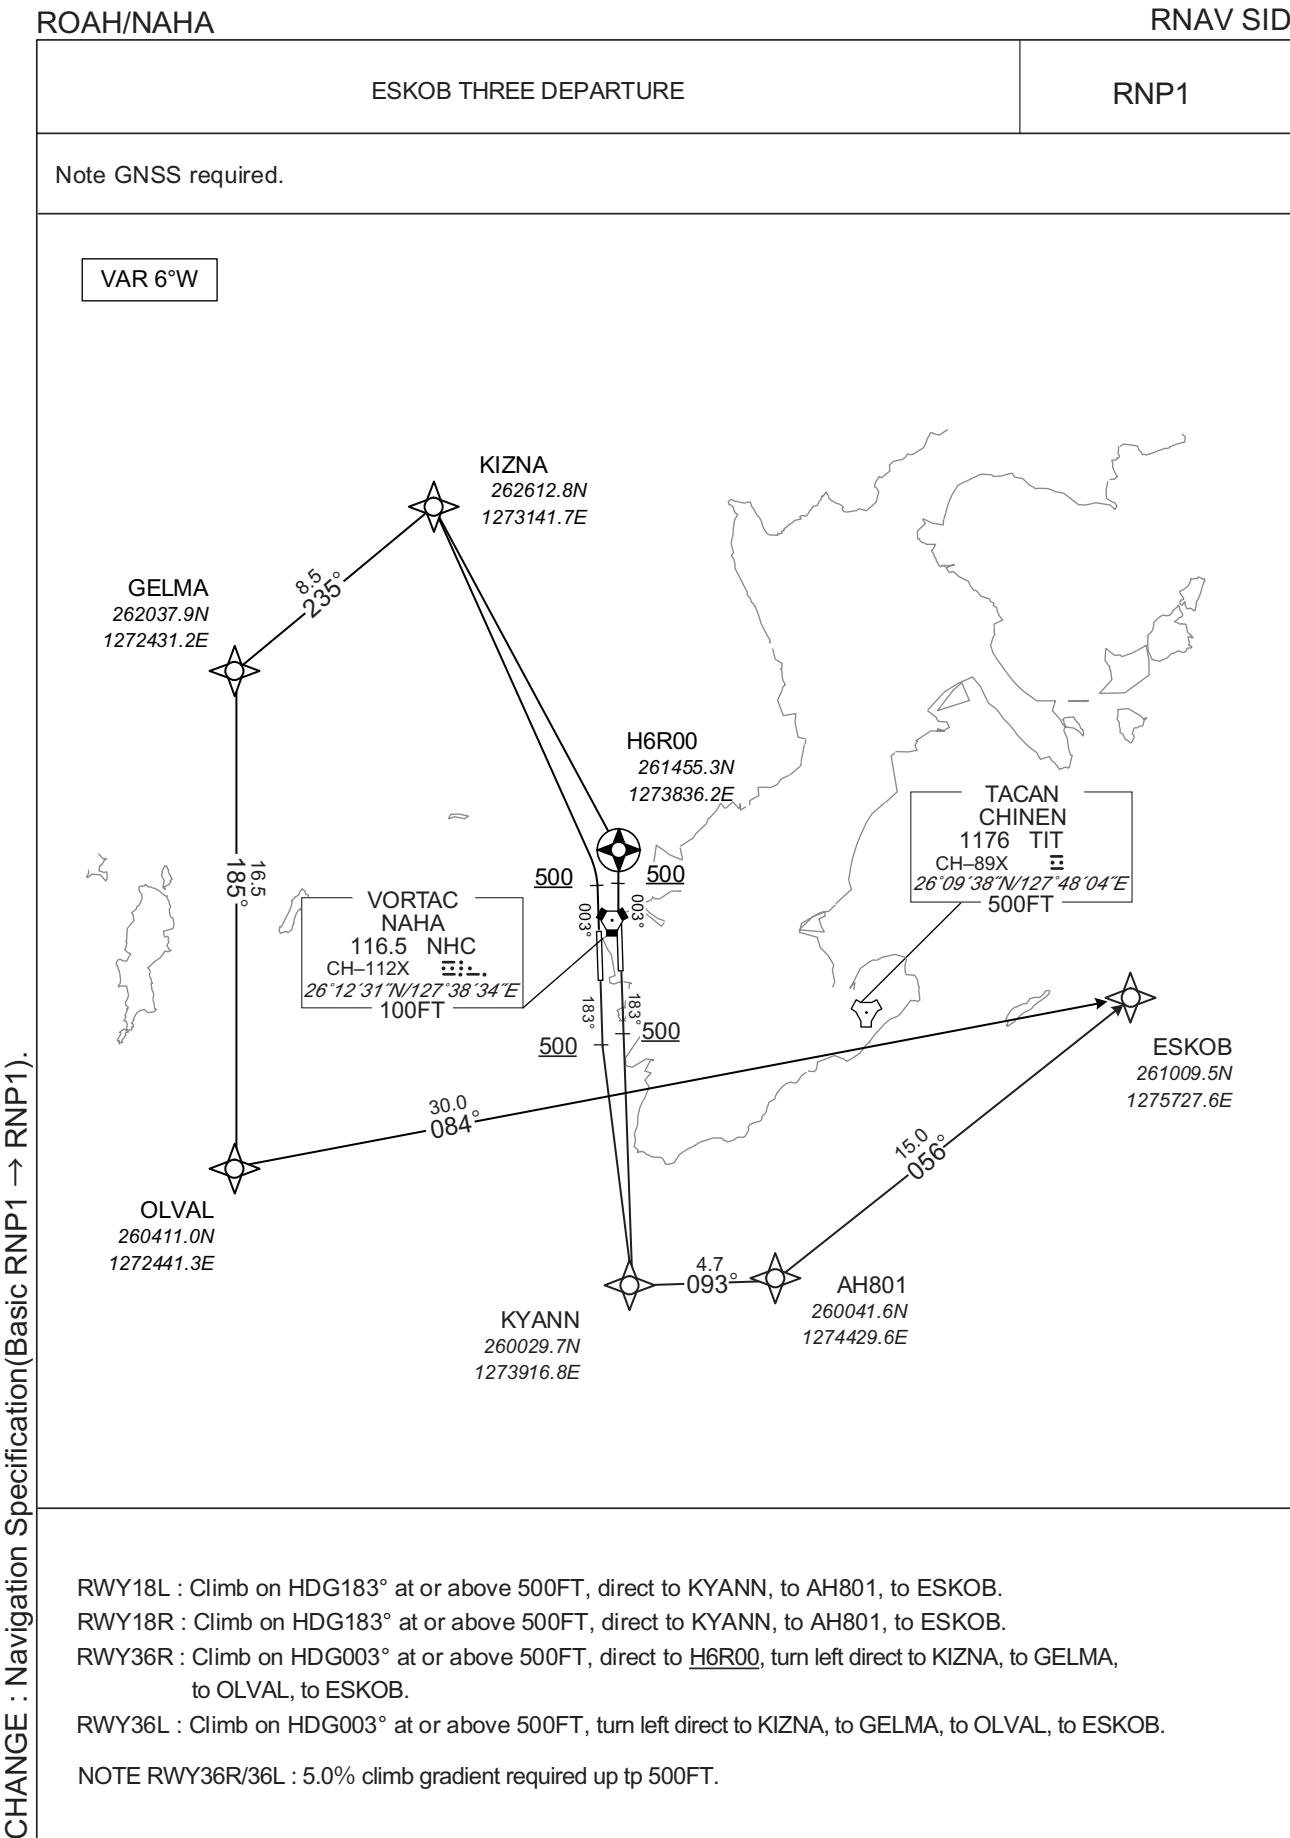

STANDARD DEPARTURE CHART-INSTRUMENT

ROAH/ NAHA

RNAV SID

ESKOB THREE DEPARTURE

RWY18L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	183 (177.6)	-5.6	-	-	+500	-	-	RNP1
002	DF	KYANN	-	-	-5.6	-	-	-	-	-	RNP1
003	TF	AH801	-	093 (087.6)	-5.6	4.7	-	-	-	-	RNP1
004	TF	ESKOB	-	056 (050.9)	-5.6	15.0	-	-	-	-	RNP1

RWY18R

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	183 (177.6)	-5.6	-	-	+500	-	-	RNP1
002	DF	KYANN	-	-	-5.6	-	-	-	-	-	RNP1
003	TF	AH801	-	093 (087.6)	-5.6	4.7	-	-	-	-	RNP1
004	TF	ESKOB	-	056 (050.9)	-5.6	15.0	-	-	-	-	RNP1

RWY36R


Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	003 (357.6)	-5.6	-	-	+500	-	-	RNP1
002	DF	H6R00	Y	-	-5.6	-	-	-	-	-	RNP1
003	DF	KIZNA	-	-	-5.6	-	L	-	-	-	RNP1
004	TF	GELMA	-	235 (229.0)	-5.6	8.5	-	-	-	-	RNP1
005	TF	OLVAL	-	185 (179.5)	-5.6	16.5	-	-	-	-	RNP1
006	TF	ESKOB	-	084 (078.4)	-5.6	30.0	-	-	-	-	RNP1

RWY36L

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	003 (357.6)	-5.6	-	-	+500	-	-	RNP1
002	DF	KIZNA	-	-	-5.6	-	L	-	-	-	RNP1
003	TF	GELMA	-	235 (229.0)	-5.6	8.5	-	-	-	-	RNP1
004	TF	OLVAL	-	185 (179.5)	-5.6	16.5	-	-	-	-	RNP1
005	TF	ESKOB	-	084 (078.4)	-5.6	30.0	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

STANDARD DEPARTURE CHART-INSTRUMENT

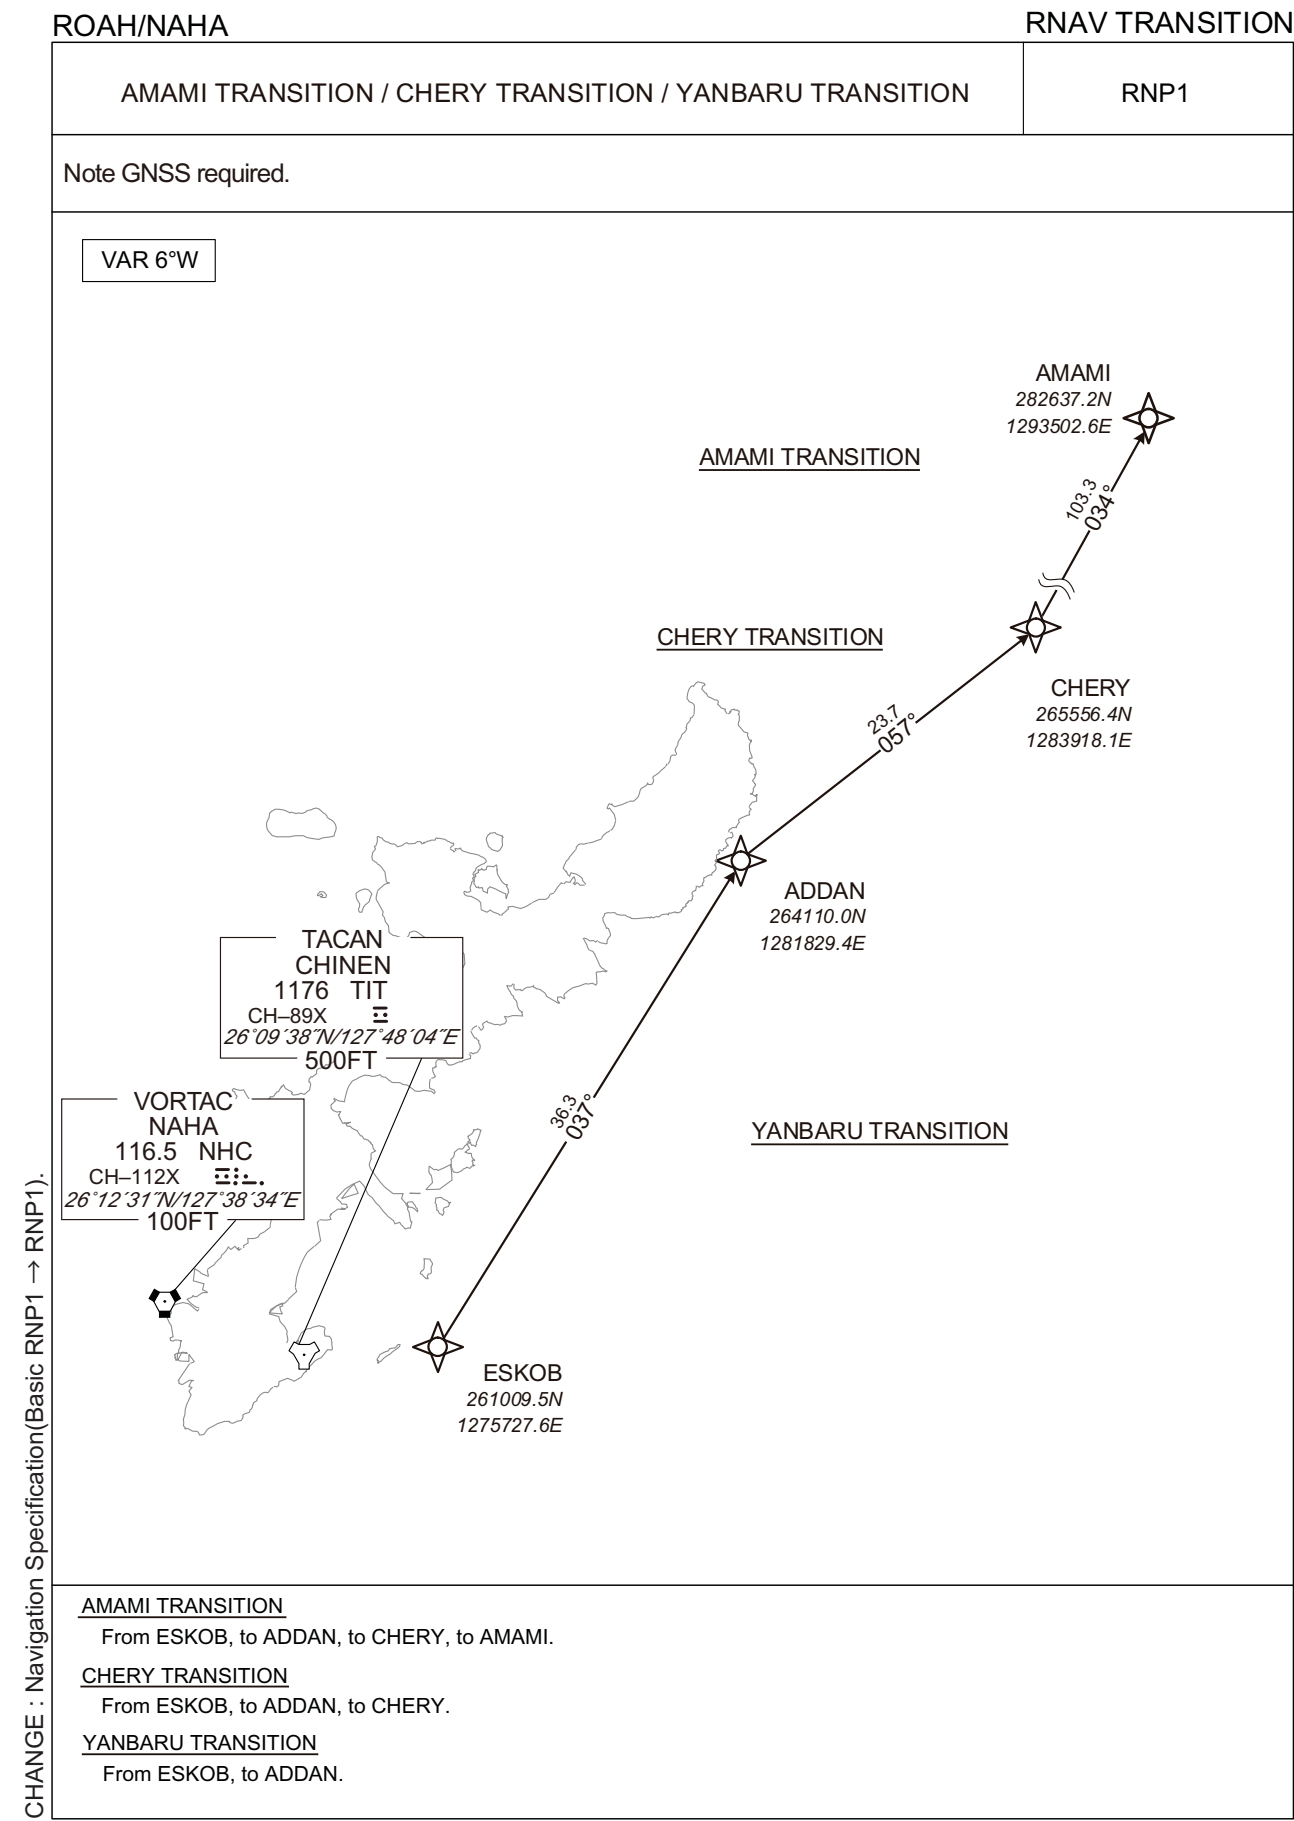

STANDARD DEPARTURE CHART-INSTRUMENT

ROAH / NAHA

RNAV TRANSITION

AMAMI TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESKOB	-	-	-5.6	-	-	-	-	-	RNP1
002	TF	ADDAN	-	037 (031.2)	-5.6	36.3	-	-	-	-	RNP1
003	TF	CHERY	-	057 (051.4)	-5.6	23.7	-	-	-	-	RNP1
004	TF	AMAMI	-	034 (028.3)	-5.6	103.3	-	-	-	-	RNP1

CHERY TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESKOB	-	-	-5.6	-	-	-	-	-	RNP1
002	TF	ADDAN	-	037 (031.2)	-5.6	36.3	-	-	-	-	RNP1
003	TF	CHERY	-	057 (051.4)	-5.6	23.7	-	-	-	-	RNP1

YANBARU TRANSITION											
Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	IF	ESKOB	-	-	-5.6	-	-	-	-	-	RNP1
002	TF	ADDAN	-	037 (031.2)	-5.6	36.3	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).