


INSTRUMENT APPROACH CHART - ICAO

EGNOS AERODROME ELEV CH 75174 E28A 46

APP Roma Radar 118.800 (133.250)
TWR Lamezia TWR 125.900 122.100
ATIS Lamezia Terminal Information 119.930


LAMEZIA TERME (LICA) RNP RWY 28

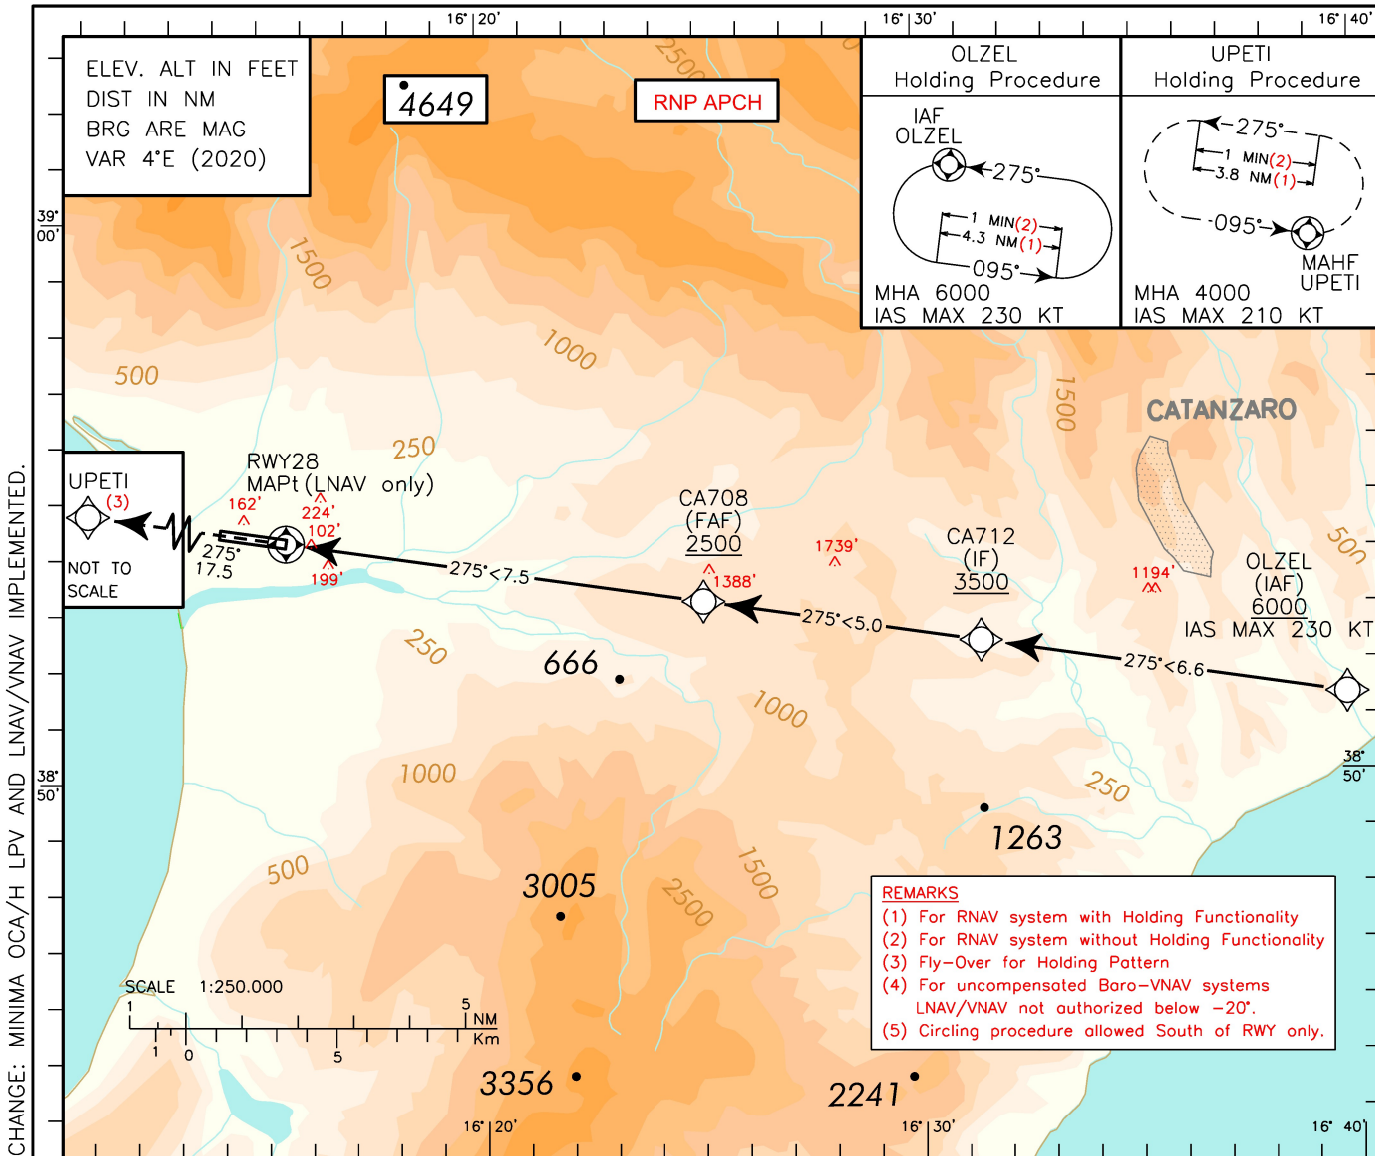

REMARKS
 (1) For RNAV system with Holding Functionality
 (2) For RNAV system without Holding Functionality
 (3) Fly-Over for Holding Pattern
 (4) For uncompensated Baro-VNAV systems LNAV/VNAV not authorized below -20'.
 (5) Circling procedure allowed South of RWY only.

TRANSITION ALT 6000
 TCH 17.00 M

MISSED APPROACH: Climbing to 4000 FT, proceed on course 275° to UPETI and hold.
REMARK: Missed approach obstacle clearance is provided by 2.5% gradient. 3.6% (219 ft/NM) until 4000 ft is required to remain inside vertical limits of controlled airspace while proceeding to missed approach holding pattern.

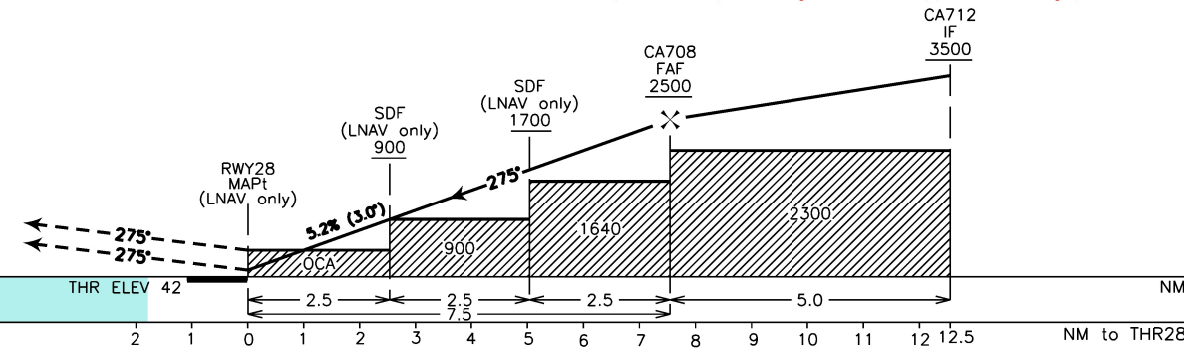

STRAIGHT IN APPROACH	OCA (OCH)				CIRCLING SECTOR (5)	THR28	ALT(HGT)	FT/MIN	GS	MSA 25NM LICA ARP
	A	B	C	D						
STRAIGHT IN APPROACH	LPV	242 (200)	244 (202)	252 (210)	263 (221)	7	2327(2285)			8800
	LNAV/VNAV	354 (312)	366 (324)	374 (332)	385 (343)	6	2008(1966)	425	80	
	LNAV	450 (404)				5	1690(1648)	540	100	
CIRCLING					4	1371(1329)	648	120		
					3	1053(1011)	756	140		
						2	734(692)	864	160	