

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA


RNAV SID

KAGYA TWO DEPARTURE

RNP1

Note GNSS required.

VAR 7°W

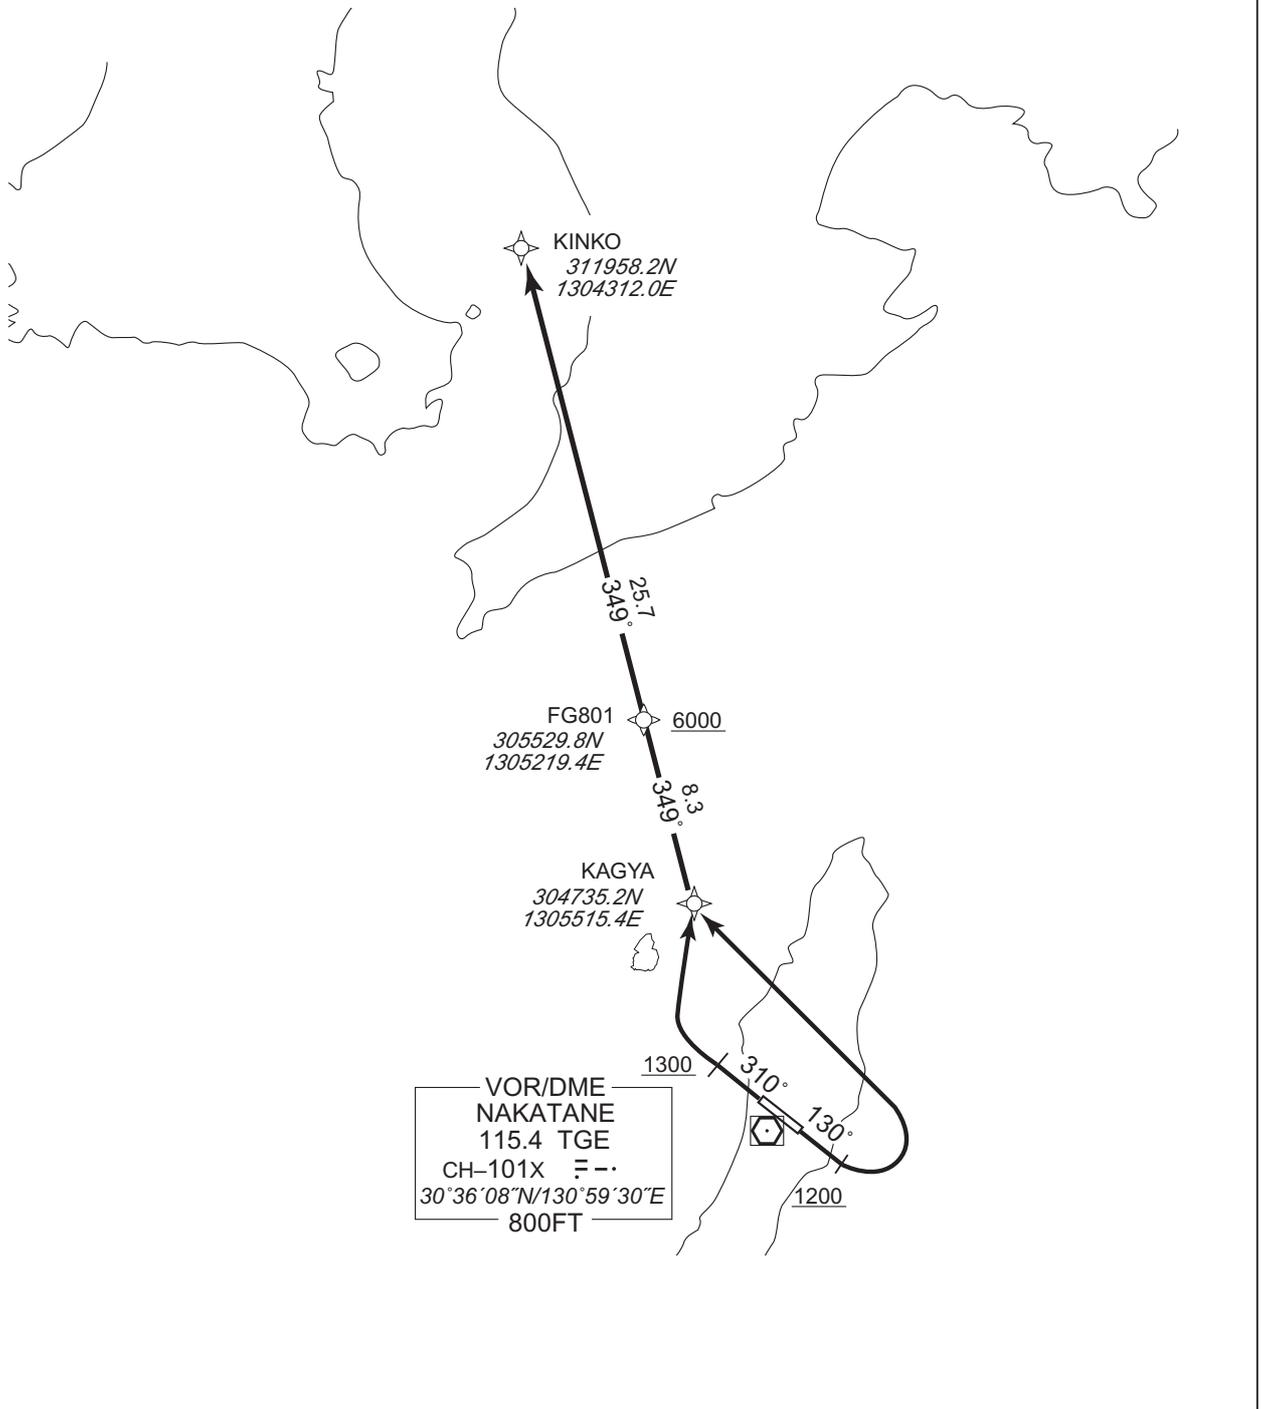

CHANGE : Navigation Specification(Basic RNP1 → RNP1).

RWY13 : Climb on HDG 130° at or above 1200FT, turn left direct to KAGYA, to FG801 at or above 6000FT, to KINKO.

RWY31 : Climb on HDG 310° at or above 1300FT, turn right direct to KAGYA, to FG801 at or above 6000FT, to KINKO.

STANDARD DEPARTURE CHART -INSTRUMENT

RJFG / TANEGASHIMA

RNAV SID

KAGYA TWO DEPARTURE

RWY13

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	130 (123.0)	-7.0	-	-	+1200	-	-	RNP1
002	DF	KAGYA	-	-	-7.0	-	L	-	-	-	RNP1
003	TF	FG801	-	349 (342.4)	-7.0	8.3	-	+6000	-	-	RNP1
004	TF	KINKO	-	349 (342.3)	-7.0	25.7	-	-	-	-	RNP1

RWY31

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	310 (303.0)	-7.0	-	-	+1300	-	-	RNP1
002	DF	KAGYA	-	-	-7.0	-	R	-	-	-	RNP1
003	TF	FG801	-	349 (342.4)	-7.0	8.3	-	+6000	-	-	RNP1
004	TF	KINKO	-	349 (342.3)	-7.0	25.7	-	-	-	-	RNP1

CHANGE : Navigation Specification(Basic RNP1 → RNP1).