


Katowice - Pyrzowice
RNAV RWY 08

ADADO 1L BABKO 4L KURON 4L LUMVE 1L LUXAR 5L
NAVUR 4L OMFOL 1L REGTO 3L TUSIN 4L

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 6500

Kraków APPROACH	121.075, 126.975, 135.405
Katowice GROUND	121.805
Katowice TOWER	129.255

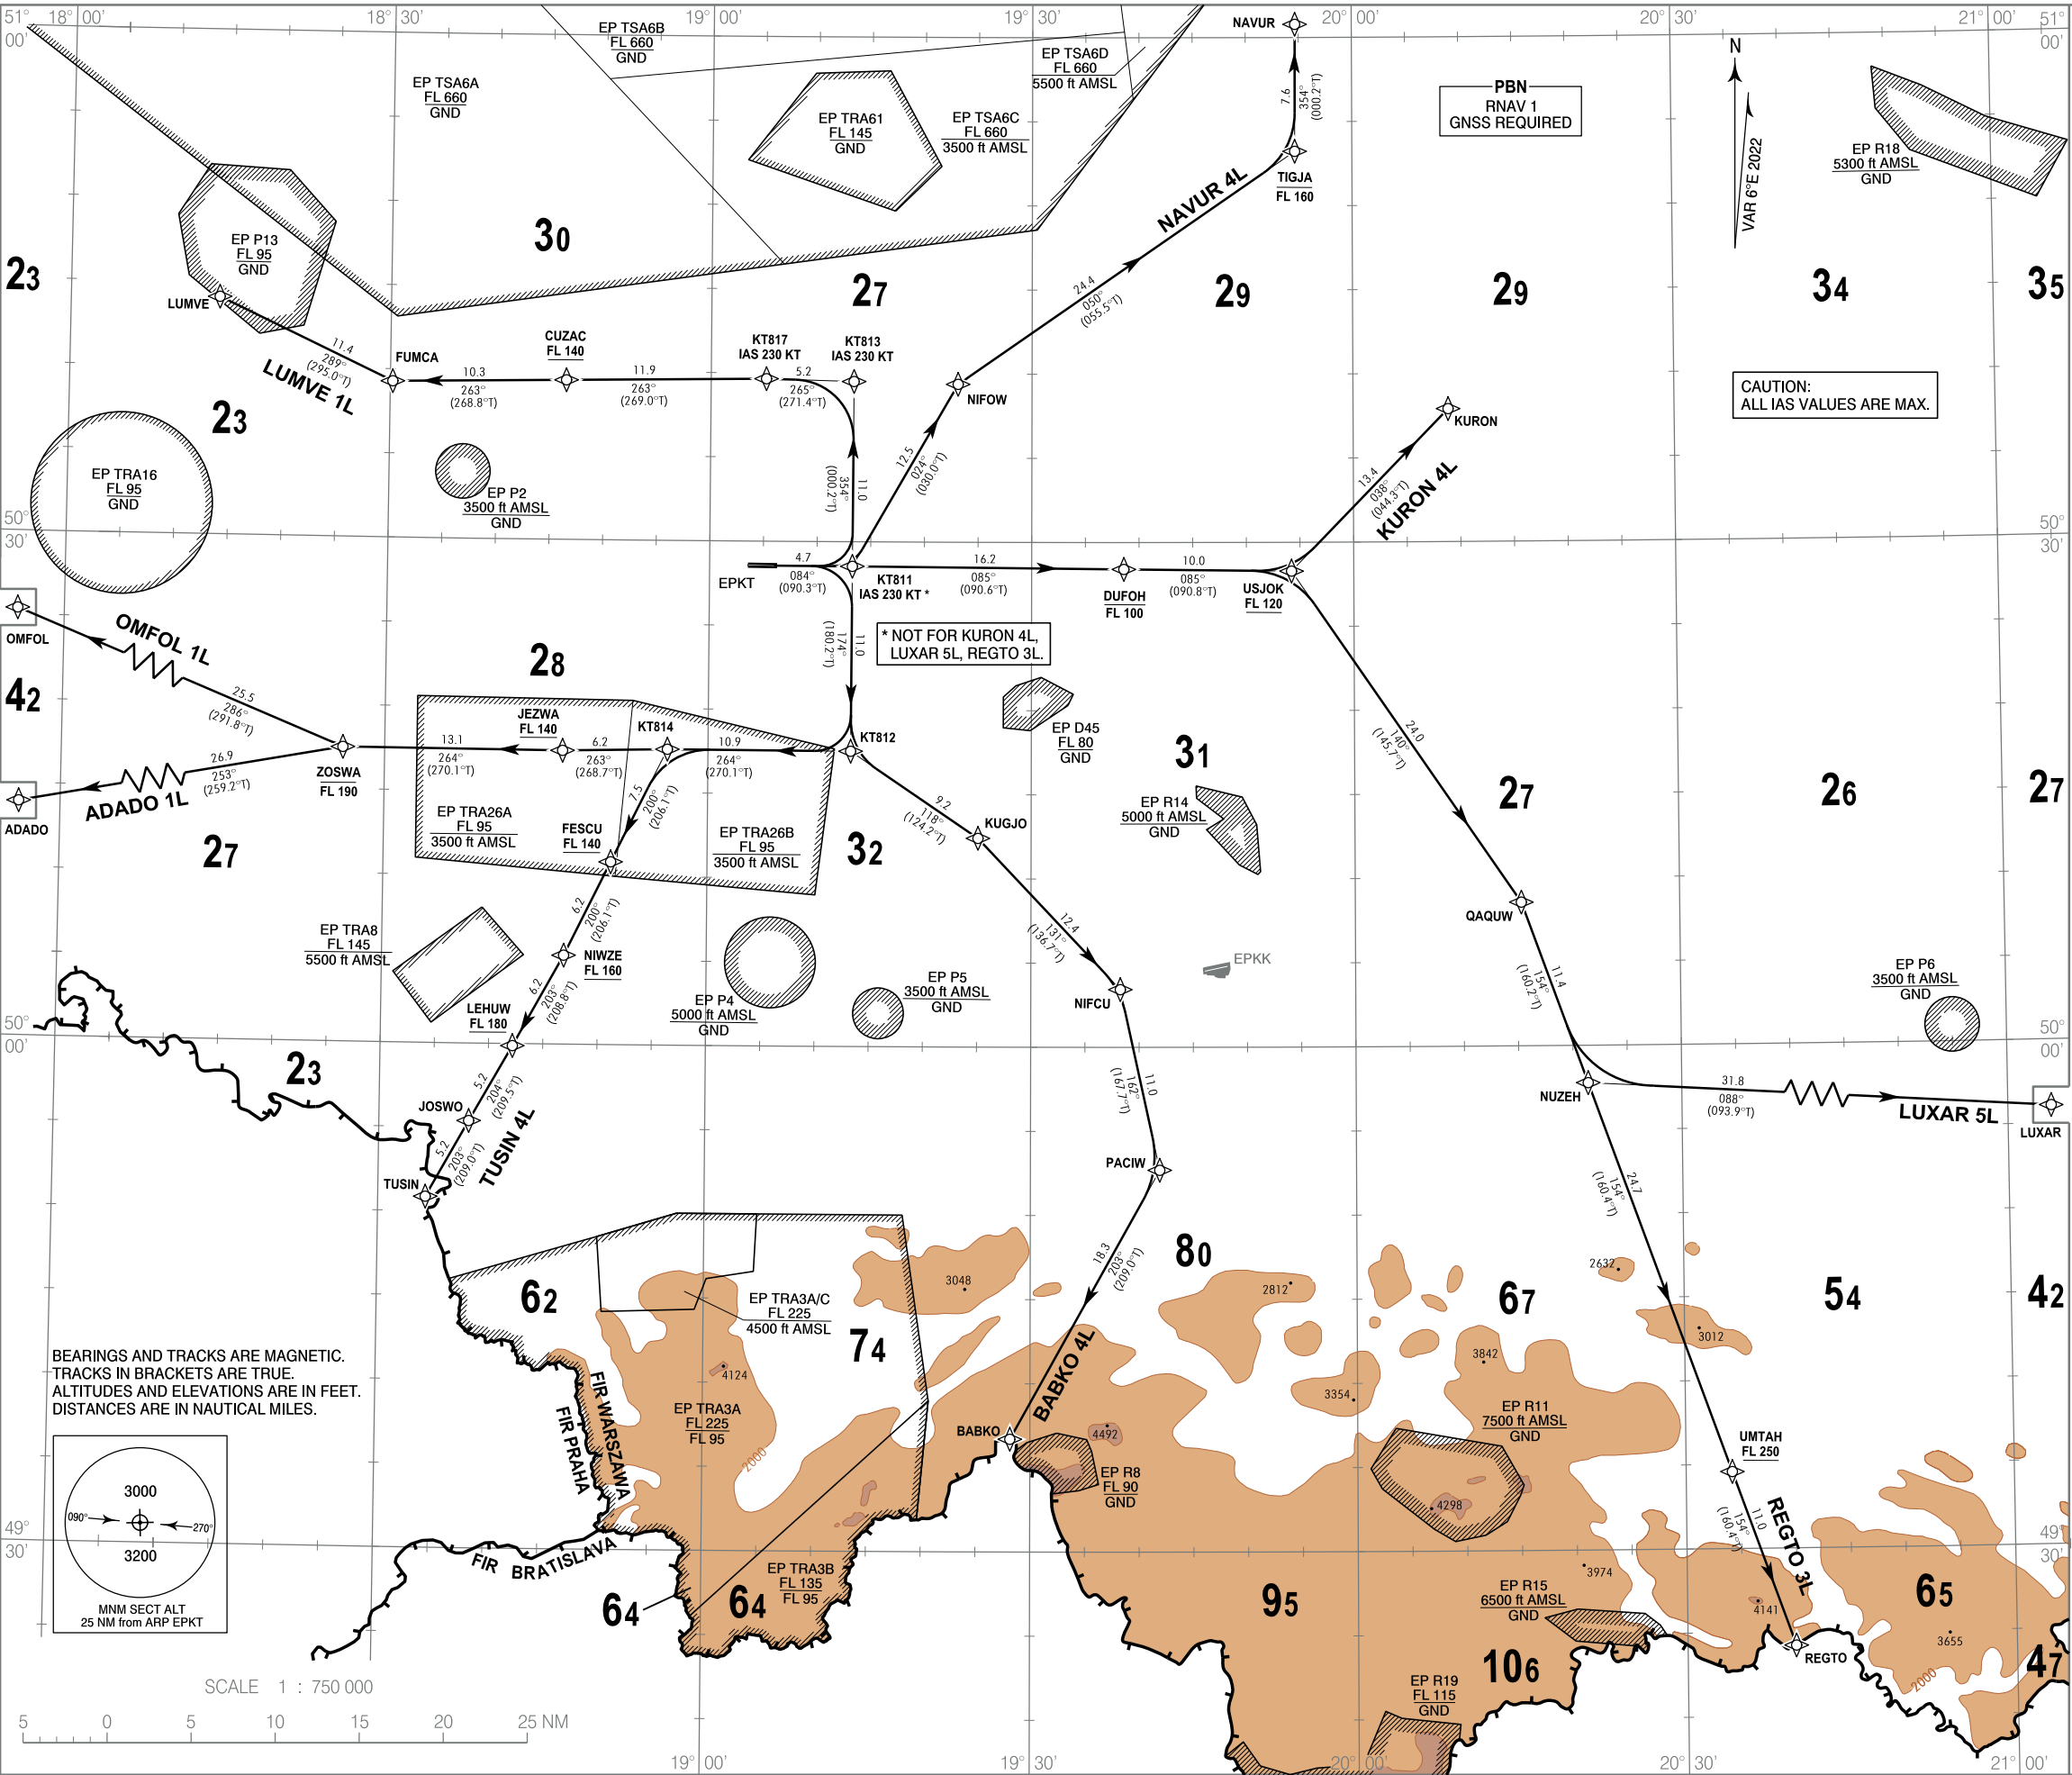

1. All aircraft which cannot follow and utilize RNAV 1 procedures shall advise ATC before start up. Radar vectoring will be provided.
2. All aircraft unable to achieve SID profil restrictions shall advise ATC before start up.
3. MAX IAS during initial turn as indicated in route description.
4. Initial SID climb to 6000, unless otherwise cleared by ATC.

RADIO COMMUNICATION FAILURE PROCEDURE

1. Set transponder to 7600.
2. Continue on assigned and acknowledged SID. After 3 minutes climb to FPL flight level.
3. If being vectored, continue on assigned heading. After 3 minutes proceed direct to last SID WPT climbing to FPL flight level.

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO

Katowice - Pyrzowice
RNAV RWY 08
ADADO 1L BABKO 4L KURON 4L LUMVE 1L LUXAR 5L NAVUR 4L OMFOL 1L REGTO 3L TUSIN 4L

ADADO 1L

PDG 7% REQUIRED UP TO ZOSWA

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-230	RNAV 1
002	TF	KT812	174 (180.2)	11.00	-	-	RNAV 1
003	TF	KT814	264 (270.1)	10.90	-	-	RNAV 1
004	TF	JEZWA	263 (268.7)	6.24	+FL140	-	RNAV 1
005	TF	ZOSWA	264 (270.1)	13.07	-FL190	-	RNAV 1
006	TF	ADADO	253 (259.2)	26.93	-	-	RNAV 1

BABKO 4L

PDG 7% REQUIRED UP TO PACIW

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-230	RNAV 1
002	TF	KT812	174 (180.2)	11.00	-	-	RNAV 1
003	TF	KUGJO	118 (124.2)	9.18	-	-	RNAV 1
004	TF	NIFCU	131 (136.7)	12.36	-	-	RNAV 1
005	TF	PACIW	162 (167.7)	11.00	-	-	RNAV 1
006	TF	BABKO	203 (209.0)	18.32	-	-	RNAV 1

KURON 4L

PDG 7% REQUIRED UP TO USJOK

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-	RNAV 1
002	TF	DUFOH	085 (090.6)	16.16	- FL100	-	RNAV 1
003	TF	USJOK	085 (090.8)	9.98	+FL120	-	RNAV 1
004	TF	KURON	038 (044.3)	13.43	-	-	RNAV 1

LUMVE 1L

PDG 7% REQUIRED UP TO CUZAC

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-230	RNAV 1
002	TF	KT813	354 (000.2)	11.00	-	-230	RNAV 1
003	TF	KT817	265 (271.4)	5.21	-	-230	RNAV 1
004	TF	CUZAC	263 (269.0)	11.90	+FL140	-	RNAV 1
005	TF	FUMCA	263 (268.8)	10.34	-	-	RNAV 1
006	TF	LUMVE	289 (295.0)	11.44	-	-	RNAV 1

LUXAR 5L

PDG 7% REQUIRED UP TO USJOK

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-	RNAV 1
002	TF	DUFOH	085 (090.6)	16.16	-FL100	-	RNAV 1
003	TF	USJOK	085 (090.8)	9.98	+FL120	-	RNAV 1
004	TF	QAQUW	140 (145.7)	23.97	-	-	RNAV 1
005	TF	NUZEH	154 (160.2)	11.45	-	-	RNAV 1
006	TF	LUXAR	088 (093.9)	31.80	-	-	RNAV 1

NAVUR 4L

PDG 7% REQUIRED UP TO NIFOW

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-230	RNAV 1
002	TF	NIFOW	024 (030.0)	12.53	-	-	RNAV 1
003	TF	TIGJA	050 (055.5)	24.35	-FL160	-	RNAV 1
004	TF	NAVUR	354 (000.2)	7.56	-	-	RNAV 1

OMFOL 1L

PDG 7% REQUIRED UP TO ZOSWA

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-230	RNAV 1
002	TF	KT812	174 (180.2)	11.00	-	-	RNAV 1
003	TF	KT814	264 (270.1)	10.90	-	-	RNAV 1
004	TF	JEZWA	263 (268.7)	6.24	+FL140	-	RNAV 1
005	TF	ZOSWA	264 (270.1)	13.07	-FL190	-	RNAV 1
006	TF	OMFOL	286 (291.8)	25.53	-	-	RNAV 1

TUSIN 4L

PDG 7% REQUIRED UP TO NIWZE

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-230	RNAV 1
002	TF	KT812	174 (180.2)	11.00	-	-	RNAV 1
003	TF	KT814	264 (270.1)	10.90	-	-	RNAV 1
004	TF	FESCU	200 (206.1)	7.50	+FL140	-	RNAV 1
005	TF	NIWZE	200 (206.1)	6.22	+FL160	-	RNAV 1
006	TF	LEHUW	203 (208.8)	6.18	+FL180	-	RNAV 1
007	TF	JOSWO	204 (209.5)	5.16	-	-	RNAV 1
008	TF	TUSIN	203 (209.0)	5.19	-	-	RNAV 1

REGTO 3L

PDG 7% REQUIRED UP TO USJOK

SEQUENCE NUMBER	PATH TERMINATOR	WAYPOINT IDENTIFIER	COURSE/TRACK °M (°T)	DISTANCE (NM)	ALTITUDE	SPEED (kt)	NAV SPEC
001	CF	KT811	084 (090.3)	4.66	-	-	RNAV 1
002	TF	DUFOH	085 (090.6)	16.16	-FL100	-	RNAV 1
003	TF	USJOK	085 (090.8)	9.98	+FL120	-	RNAV 1
004	TF	QAQUW	140 (145.7)	23.97	-	-	RNAV 1
005	TF	NUZEH	154 (160.2)	11.45	-	-	RNAV 1
006	TF	UMTAH	154 (160.4)	24.67	+FL250	-	RNAV 1
007	TF	REGTO	154 (160.4)	11.00	-	-	RNAV 1

WAYPOINT IDENTIFIER	COORDINATES	
ADADO	50 12 34.1 N	017 44 52.6 E
BABKO	49 36 42.0 N	019 28 10.0 E
CUZAC	50 39 28.4 N	018 46 28.2 E
DUFOH	50 28 24.2 N	019 38 35.3 E
FESCU	50 10 51.5 N	018 51 04.8 E
FUMCA	50 39 16.6 N	018 30 13.8 E
JEZWA	50 17 27.1 N	018 46 30.7 E
JOSWO	49 55 22.9 N	018 38 16.0 E
KT811	50 28 32.2 N	019 13 17.9 E
KT812	50 17 32.9 N	019 13 14.1 E
KT813	50 39 31.5 N	019 13 21.7 E
KT814	50 17 35.1 N	018 56 14.0 E
KT817	50 39 39.3 N	019 05 10.2 E
KUGJO	50 12 24.3 N	019 25 04.7 E
KURON	50 37 54.0 N	020 08 53.0 E
LEHUW	49 59 52.1 N	018 42 12.0 E
LUMVE	50 44 07.0 N	018 13 56.0 E
LUXAR	49 55 48.0 N	021 10 31.0 E
NAVUR	51 00 47.0 N	019 54 40.0 E
NIFCU	50 03 25.7 N	019 38 16.0 E
NIFOW	50 39 23.1 N	019 23 05.5 E
NIWZE	50 05 16.8 N	018 46 49.7 E
NUZEH	49 57 46.6 N	020 21 23.1 E
OMFOL	50 27 04.0 N	017 49 10.0 E
PACIW	49 52 41.5 N	019 41 53.9 E
QAUW	50 08 32.4 N	020 15 21.3 E
REGTO	49 24 13.0 N	020 39 53.0 E
TIGJA	50 53 14.1 N	019 54 37.6 E
TUSIN	49 50 51.0 N	018 34 22.2 E
UMTAH	49 34 34.4 N	020 34 13.4 E
USJOK	50 28 17.3 N	019 54 12.3 E
ZOSWA	50 17 30.0 N	018 26 07.6 E