


**AERODROME ELEV 75 FT
HEIGHTS RELATED TO
THR RWY 16R - ELEV 51 FT**

APP	126.3	126.1
	125.0	124.65
TWR	118.05	124.35
SMC	121.65	121.75
ATIS	128.05	

ILS or LOC RWY 16R

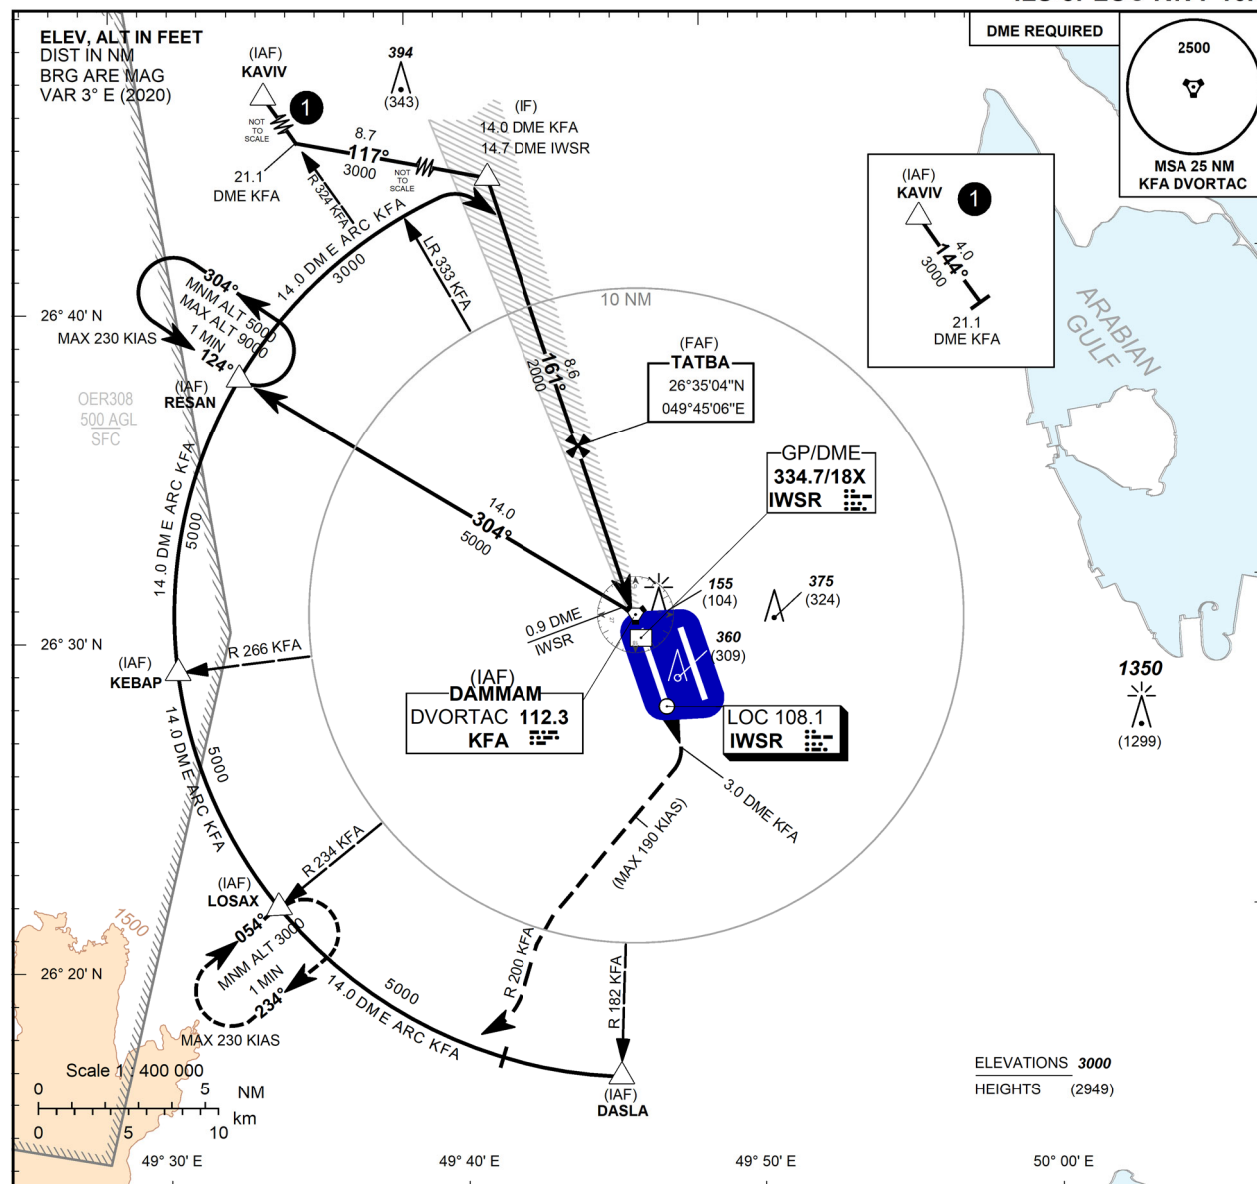


TRANSITION ALT 13000
TRANSITION LEVEL FL 150

Climb straight ahead to **3000 FT**, passing **3.0 DME KFA** turn right to establish **RDL 200 KFA**, (MAX 190 KIAS) then turn right to join **14.0 DME KFA** arc to **LOSAX** and hold at **3000 FT**, or follow ATC instruction.

ILS RDH 55

THR ELEV 51

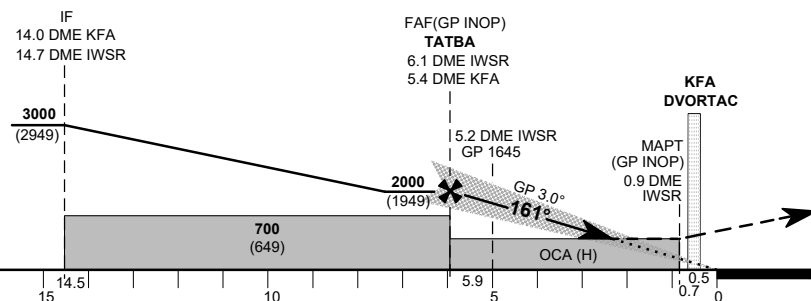NM to/from **THR RWY 16R**

		ACFT CAT	A	B	C	D/D _L										
Straight-in Approach	CAT I	OCA(H)	272 (221)			GND SPEED	Knots	70	90	110	130	150	170	190		
		RVR(m)	550			FAF-MAPT 5.2 NM	min:s	4:27	3:28	2:50	2:24	2:05	1:50	1:38		
	GP INOP	OCA(H)	400 (349)			Rate of Descent	f/min	371	478	584	690	796	902	1008		
		RVR(m)	900													
Circling		OCA(H)	710 (635)	810 (735)		DME IWSR NM	5	4			3			2		
		VIS(m)	2900	3700		4600	ALT (HGT) 3.0° APCH	1641 (1590)	1322 (1271)			1004 (953)			685 (634)	

RVR/VIS RELATED TO MDA (H) = OCA (H)

CHANGE: Minor

Amdt:1, 03 DEC 20

CAO PANS OPS