


INSTRUMENT APPROACH CHART


RJCN / NAKASHIBETSU

RNP Z RWY26(AR)

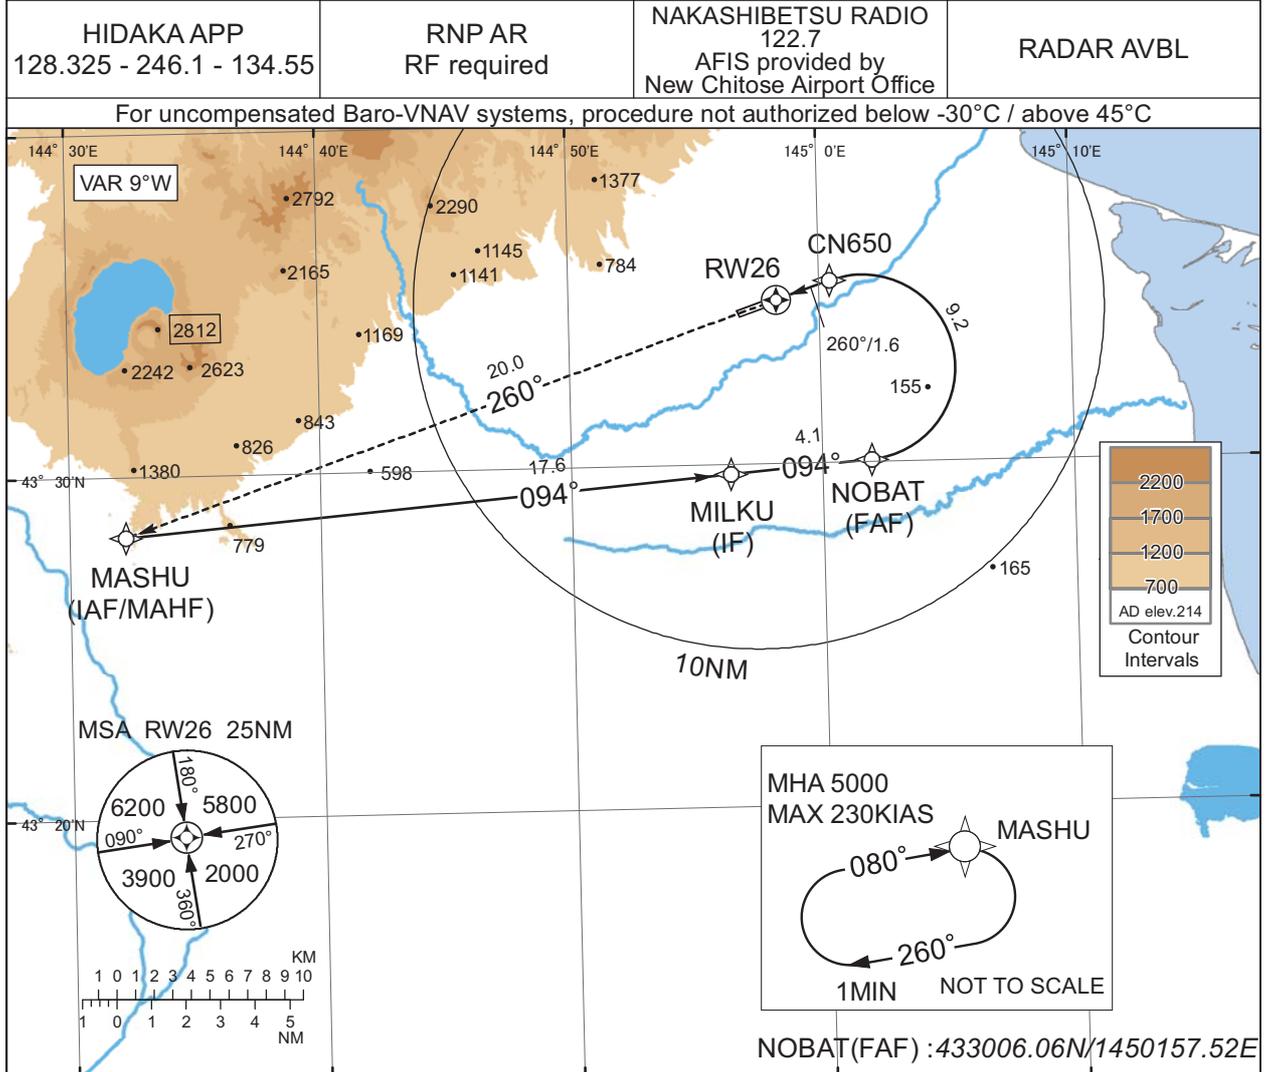

MISSED APPROACH

Climb to 5000FT, to MASHU and hold.
Contact HIDAKA APP.

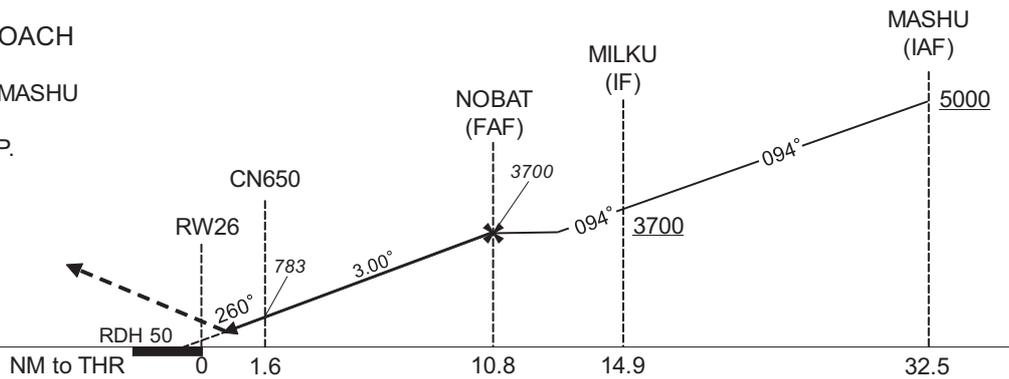

CHANGE : NOBAT established. CN661 abolished.

MINIMA	THR elev. 212	AD elev. 214
CAT	RNP 0.30	
	DA(H)	CMV
A	-	-
B	-	-
C	512(300)	1400
D	-	1600

Authorization Required

INSTRUMENT APPROACH CHART

RJCN / NAKASHIBETSU

RNP Z RWY26(AR)

Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	VPA/RDH (°/FT)	RNP Value
001	IF	MASHU	-	-	-9.2	-	-	+5000	-	-	-
002	TF	MILKU	-	094 (084.9)	-9.2	17.6	-	+3700	-	-	1.0
003	TF	NOBAT	-	094 (085.2)	-9.2	4.1	-	3700	-	-	1.0
004	RF Center: CNRF2 r=2.70NM	CN650	-	-	-9.2	9.2	L	783	-	-3.00	0.3
005	TF	RW26	Y	260 (251.0)	-9.2	1.6	-	262	-	-3.00/50	0.3
006	TF	MASHU	-	260 (251.0)	-9.2	20.0	-	5000	-	-	1.0

Path	Waypoint Identifier	Inbound Course °M(°T)	Magnetic Variation	Outbound Time (MIN)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FT)	Speed (KIAS)	RNP Value
Hold	MASHU	080 (070.4)	-9.2	1.0 (-14000)	R	5000	FL140	-230 (-14000)	1.0

Waypoint Coordinates

Waypoint Identifier	Coordinates	RF Arc Center Identifier	Coordinates
MASHU	432815.18N / 1443214.49E	CNRF2	433247.93N / 1450139.17E
MILKU	432945.72N / 1445620.67E		
NOBAT	433006.06N / 1450157.52E		
CN650	433521.30N / 1450025.71E		
RW26	433449.27N / 1445817.40E		

CHANGE : NOBAT established. CN661 abolished.