INSTRUMENT APPROACH CHART - ICAO

RADAR	120.300
TOWER	118.100

SANKT-PETERBURG, RUSSIA
PULKOVO
RNP Z RWY 10L

TRANSITION LEVEL: ❶ TRANSITION ALT: 3500 '
TRANSITION HGT: (1100)

AD ELEV: 79 '/24m
THR ELEV: 61 '/18.5m

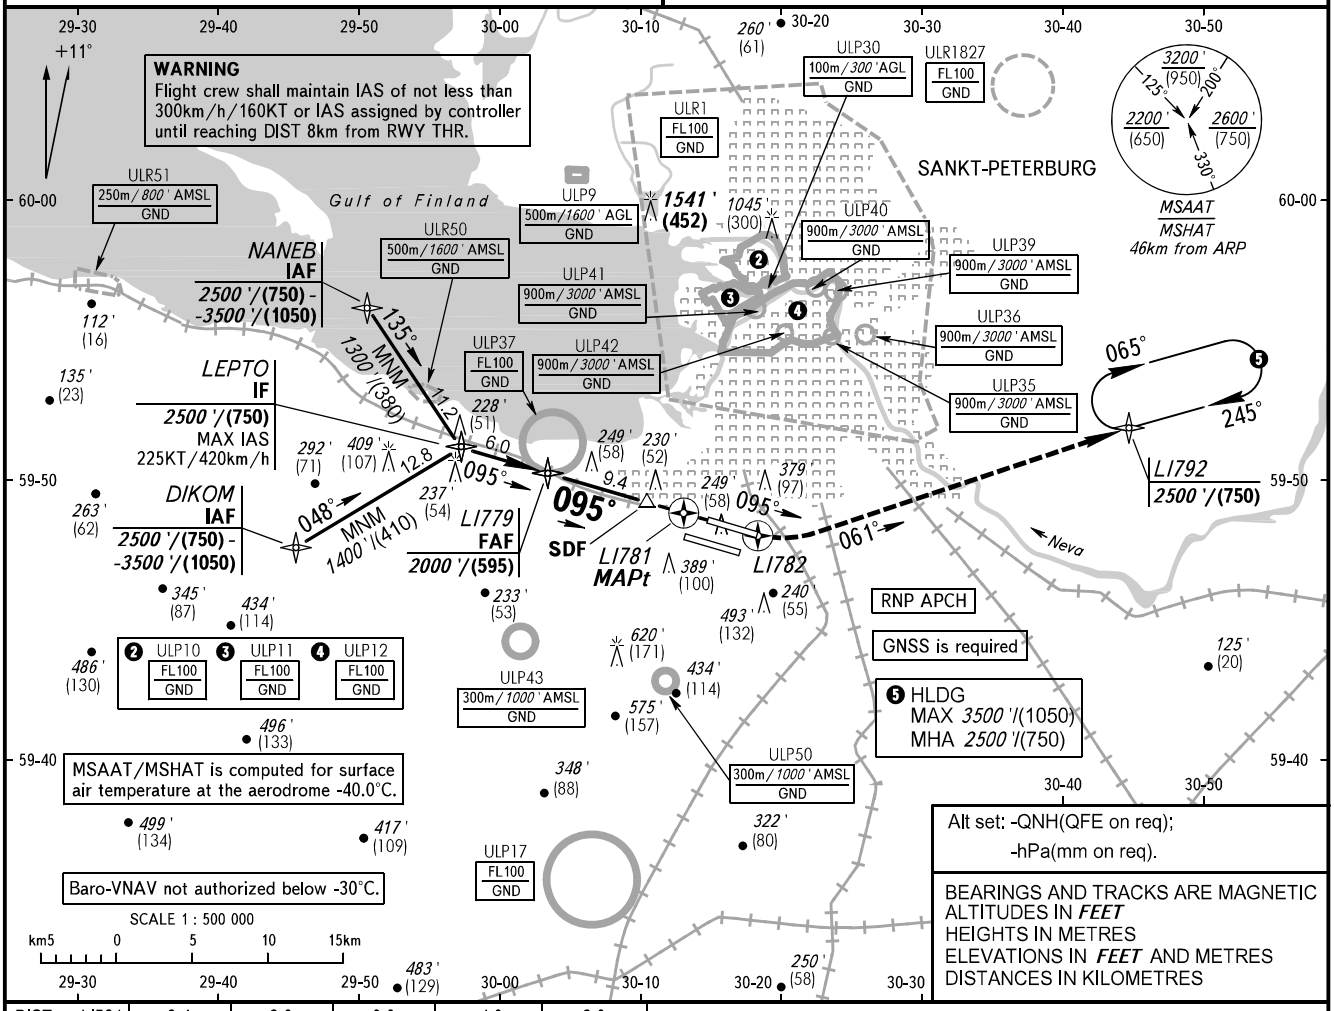

DIST to LI781	9.4	8.0	6.0	4.0	2.0
ALT/HGT	2000 '/(595)	1770 '/(520)	1420 '/(415)	1080 '/(310)	740 '/(210)

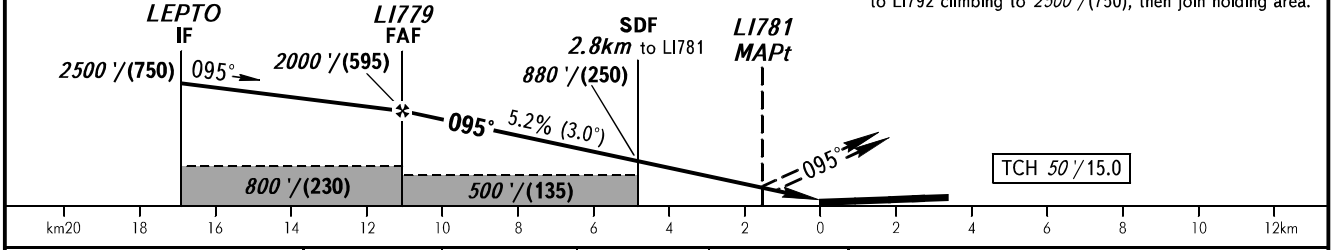

MISSED APPROACH
Climb straight ahead to LI782, turn LEFT onto track 061° to LI792 climbing to 2500 '/(750), then join holding area.

OCA(H)		A	B	C	D
Straight-in	LNAV/VNAV	340 '(280 ') (85)	350 '(290 ') (90)	370 '(310 ') (95)	410 '(350 ') (110)
Approach	LNAV	460 '(400 ') (125)	460 '(400 ') (125)	460 '(400 ') (125)	460 '(400 ') (125)
Circling		690 '(610 ') (190)	790 '(710 ') (220)	890 '(810 ') (250)	1020 '(940 ') (290)

❶ TRANSITION LEVEL:
- FL050 when QNH is 996 hPa (747mm mercury column) or above;
- FL060 when QNH is 960 hPa (720mm mercury column) or above, but less than 996 hPa (747mm mercury column);
- FL070 when QNH is less than 960 hPa (720mm mercury column).

WARNING
Visual manoeuvring to the north of the AD is PROHIBITED.



NOTE:
1. Level flight segment is not AVBL before FAF.
2. MAPt at LI781. Timing not authorized for defining MAPt.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
	kt	80	100	110	130	145	160	180	195	210
RATE OF DESCENT	m/s	2.2	2.6	3.1	3.5	3.9	4.4	4.8	5.2	5.7
	ft/min	430	516	602	688	774	860	946	1032	1118

CHANGE: WARNING