

ICAO - INSTRUMENT APPROACH CHART


For operational limitations in case of volcanic ash cloud see AD 2 LICC 1-1 tab 23 and ENR 2.1.2
CATANIA CTR

APP Catania APP/Radar 119.250
 Catania Director (120.805)
 TWR Catania TWR 118.700
 ATIS Catania Arrival and Departure Information 127.675

AD ELEV 39
 L CATANIA/FONTANAROSSA
 C VOR - Z RWY 26
 C


DOC.8168-ED.4-1993-AMD11

CHANGE: CTF NDB COMPLETELY WITHDRAWN AND NEW IAP IDENTIFICATION

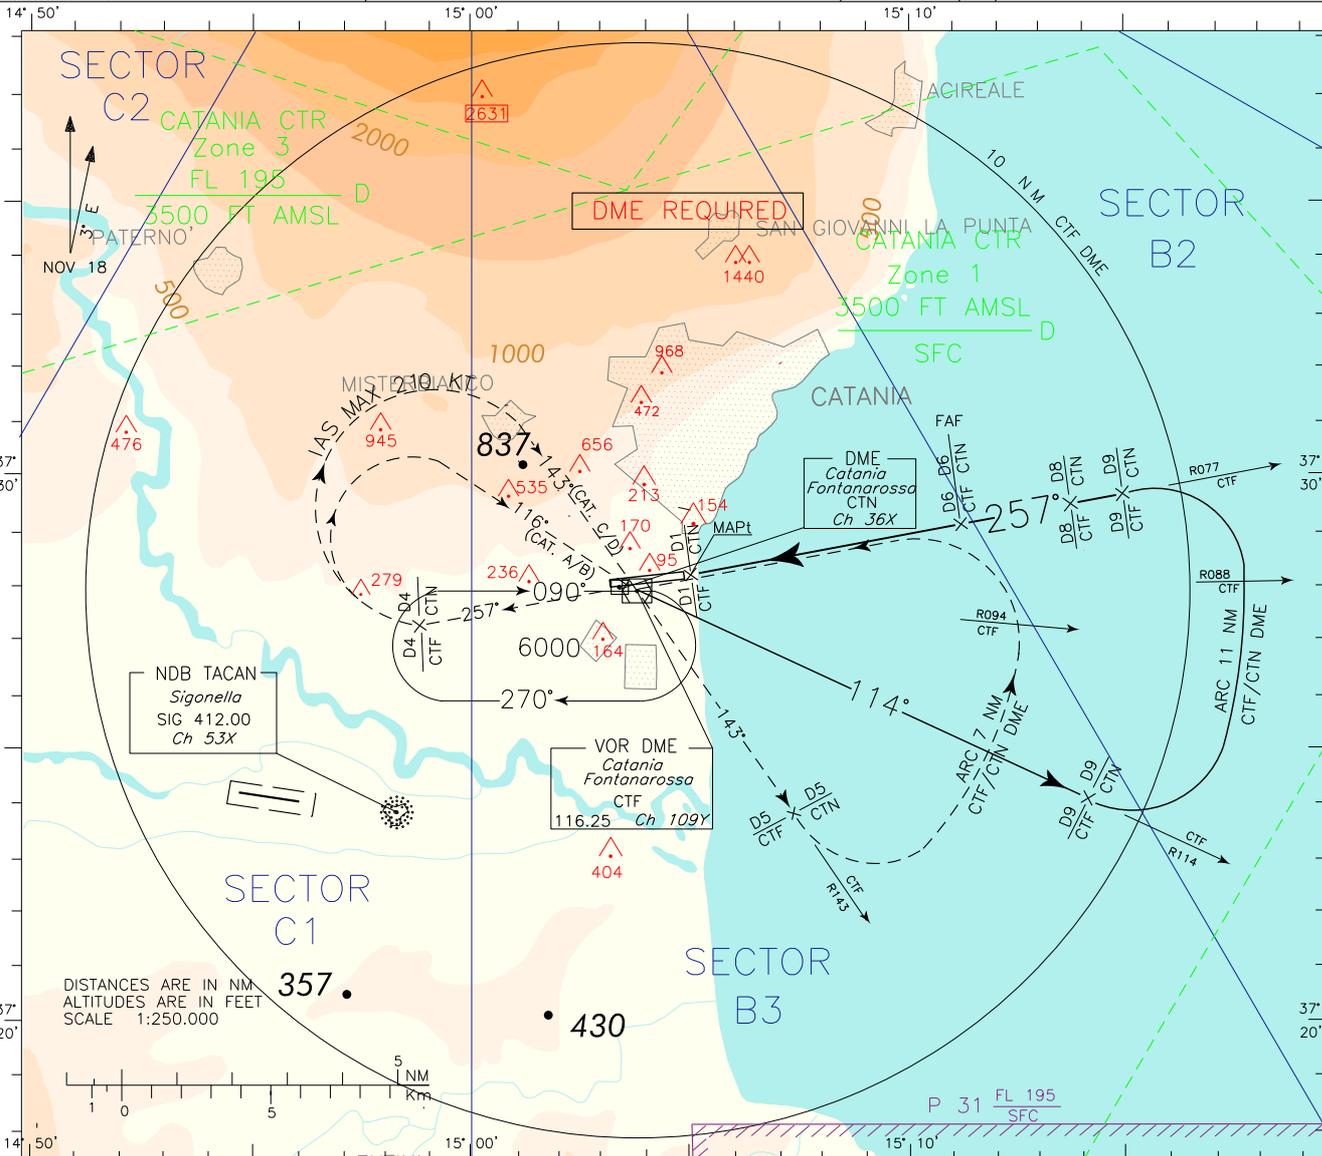

TRANSITION ALT 7000

MISSED APPROACH: Climb to 5000 ft and proceed on TR 257°. At 4 NM CTF (or CTN) DME turn right TR 143° (TR 116° for ACFT Cat. A and B) to CTF VOR, IAS MAX 210 kt. Leave CTF VOR on R143 and at 5 NM CTF (or CTN) DME turn left to join and follow 7 NM ARC CTF (or CTN) DME. Crossing R094 turn left to join and follow R077 to holding pattern.

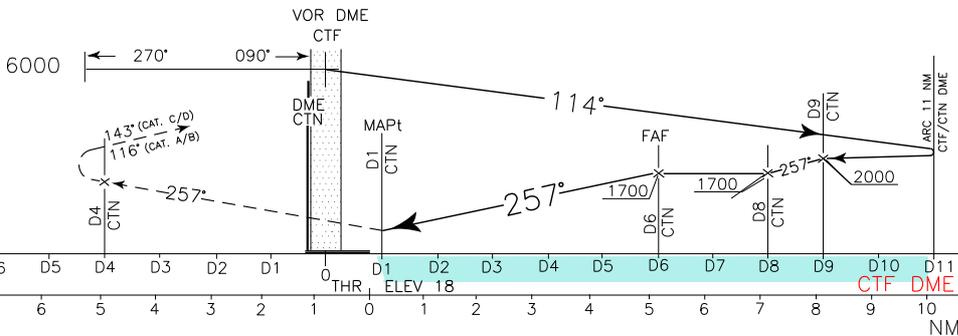

CTF DME		D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	CTF DME		
		13	12	11	10	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	10	11		
		NM																										
OCA (OCH)		A	B	C	D	(1) REMARK: Circling procedure allowed South of RWY only. 										GS	FT PER MIN	DIST CTF	ALT(HGT)	MNM SECT ALT								
STRAIGHT IN APPROACH		VOR - Z														630 (620)				100	531	5	1385(1367)	CTF	VOR			
CIRCLING (1)		700 (670)		790 (760)												820 (790)		120	637	4	1070(1052)	5800						

Data provided by AM-CIGA