

STANDARD DEPARTURE CHART
INSTRUMENT (SID) - ICAO


TRANSITION ALTITUDE
10 000

DUBROVNIK ATIS	118.425
DUBROVNIK TOWER	129.500
DUBROVNIK RADAR	123.600
DUBROVNIK DELIVERY	125.400

DUBROVNIK / Ruđer Bošković (LDDU)

DOPUT 1V	AMUGO 1V	AIOSA 1V
BEVIS 1V	MOKUN 2V	

RNAV RWY 29

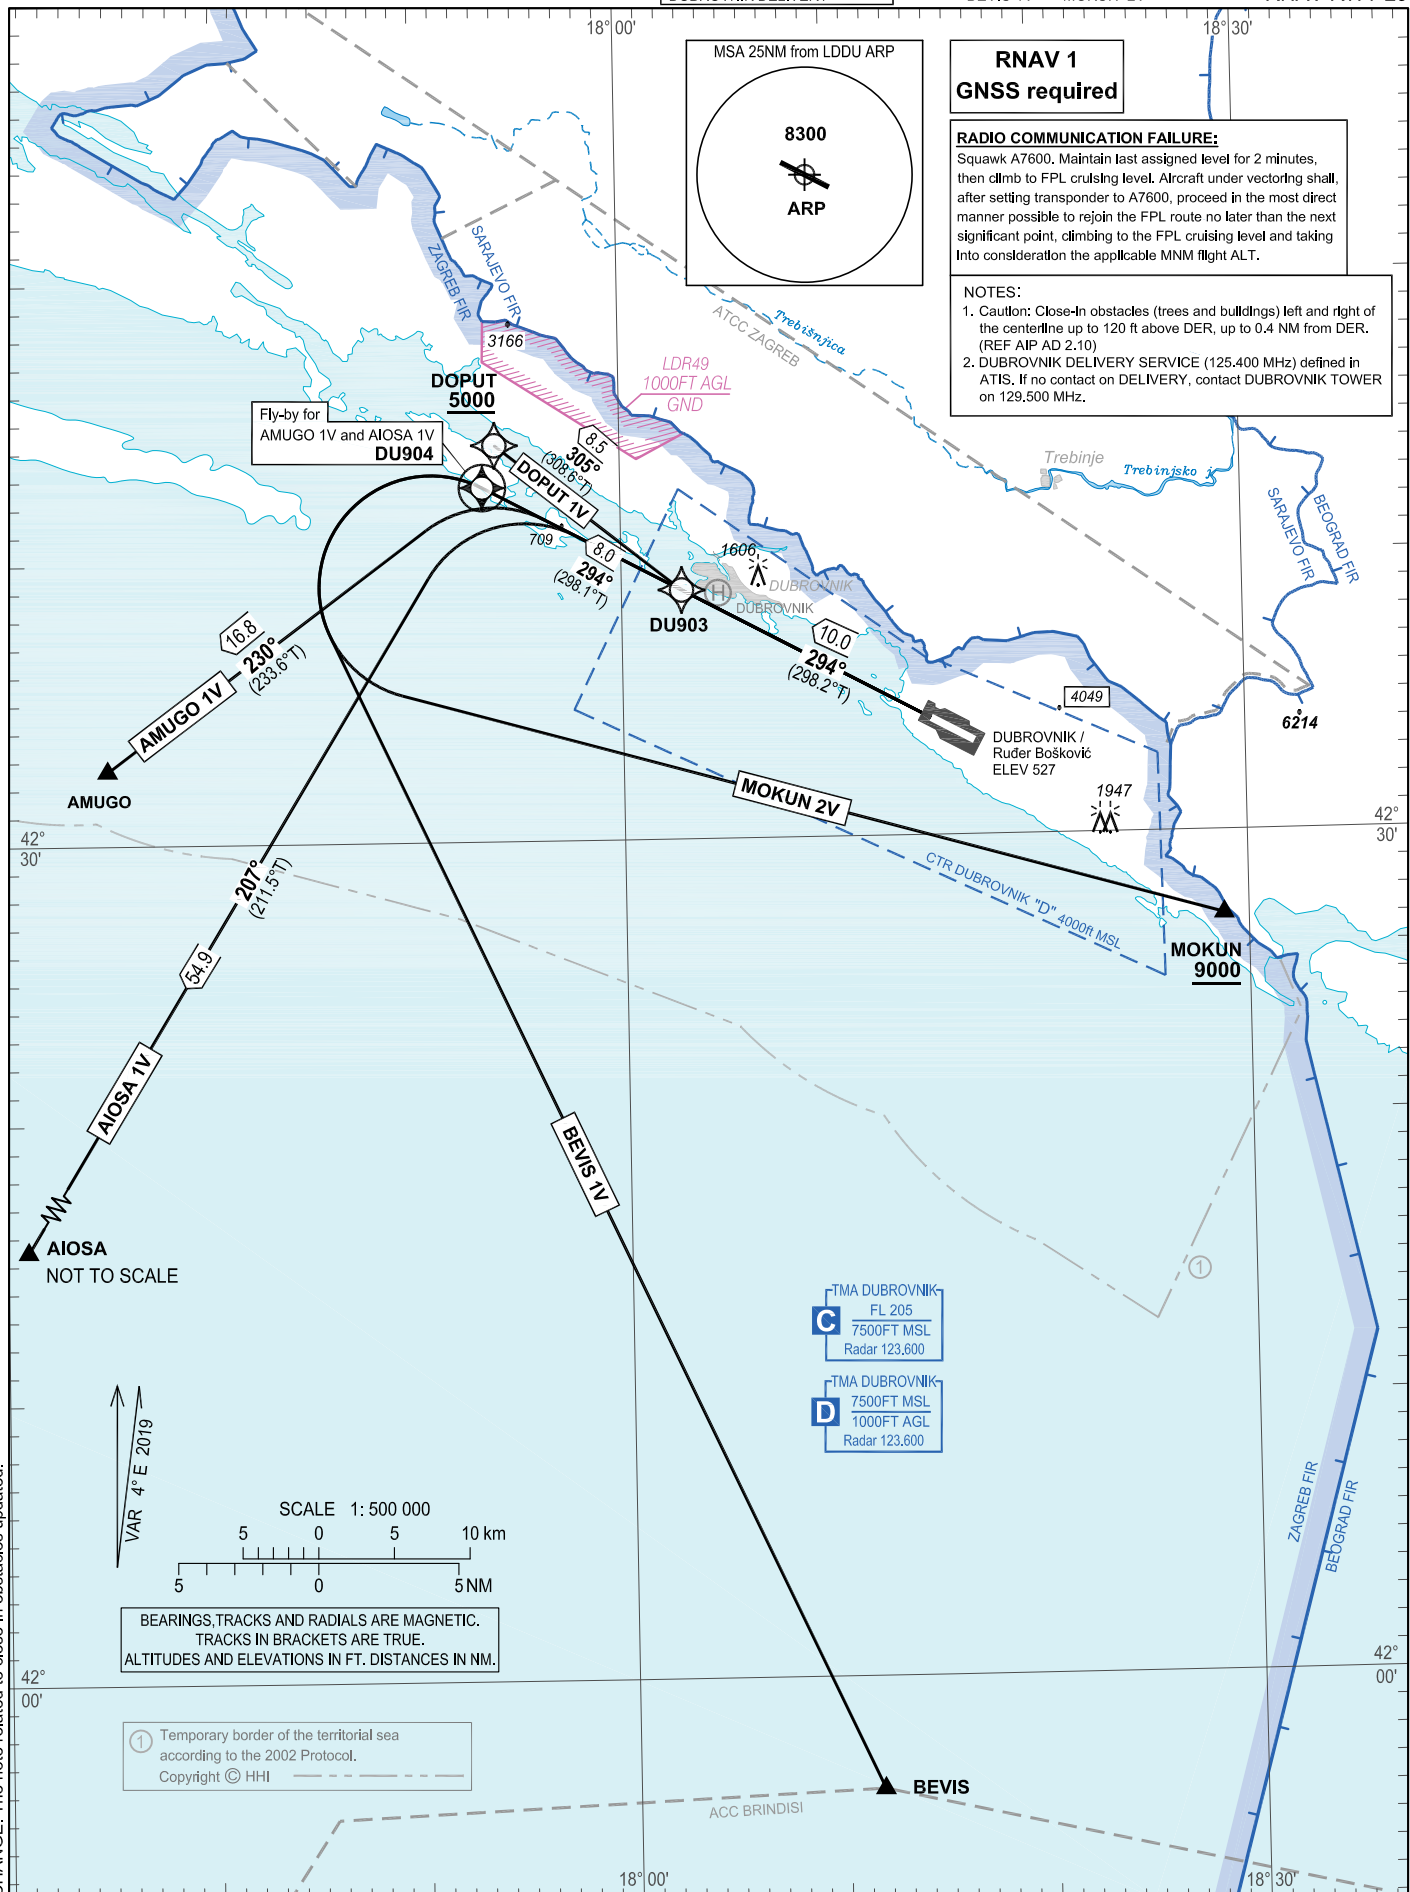

DUBROVNIK / Ruđer Bošković (LDDU)

RNAV RWY 29

DOPUT 1V
BEVIS 1V

AMUGO 1V
MOKUN 2V

AIOSA 1V

GENERAL INFORMATION AND REQUIREMENTS FOR ALL SIDs

- After take-off climb initially 8000 ft AMSL.

- Unless otherwise instructed, after passing 3000 ft AMSL contact DUBROVNIK RADAR on 123.600 MHz.

LDDU RNAV STANDARD INSTRUMENT DEPARTURE RWY 29

Proposed tabular description for navigation database coding

Serial number	Route	Path descriptor	Waypoint name	Flyover	Course °M (°T)	Magnetic variation	Distance (NM)	Turn direction	Altitude (ft)	Speed (kt)	Remarks	NAV SPEC
010	DOPUT 1V	CF	DU903	-	294° (298.2°T)	4°E	10.0	-	-	-	On ATC authorization only. Expect further climb and radar vectoring to en-route transition point filed in FPL.	RNAV 1
020		TF	DOPUT	-	305° (308.6°T)	4°E	8.5	-	+5000	-		
010	AMUGO 1V	CF	DU903	-	294° (298.2°T)	4°E	10.0	-	-	-	-	RNAV 1
020		TF	DU904	-	294° (298.1°T)	4°E	8.0	-	-	-		
030		TF	AMUGO	-	230° (233.6°T)	4°E	16.8	-	-	-		
010	AIOSA 1V	CF	DU903	-	294° (298.2°T)	4°E	10.0	-	-	-	-	RNAV 1
020		TF	DU904	-	294° (298.1°T)	4°E	8.0	-	-	-		
030		TF	AIOSA	-	207° (211.5°T)	4°E	54.9	-	-	-		
010	BEVIS 1V	CF	DU903	-	294° (298.2°T)	4°E	10.0	-	-	-	-	RNAV 1
020		CF	DU904	Y	294° (298.1°T)	4°E	8.0	-	-	-		
030		DF	BEVIS	-	- -	4°E	-	L	-	-		
010	MOKUN 2V	CF	DU903	-	294° (298.2°T)	4°E	10.0	-	-	-	-	RNAV 1
020		CF	DU904	Y	294° (298.1°T)	4°E	8.0	-	-	-		
030		DF	MOKUN	-	- -	4°E	-	L	+9000	-		

Waypoint coordinates		
Waypoint name	WGS-84 latitude	WGS-84 longitude
AIOSA	415542N	0171454E
BEVIS	415558N	0181140E
AMUGO	423239N	0173502E
DOPUT	424409.5N	0175356.8E
MOKUN	422701N	0182848E
DU903	423853.6N	0180254.6E
DU904	424239.2N	0175320.1E

CHANGE: The note related to close-in obstacles updated.