STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

NAKAU TWO DEPARTURE	RNP1

Note GNSS required.

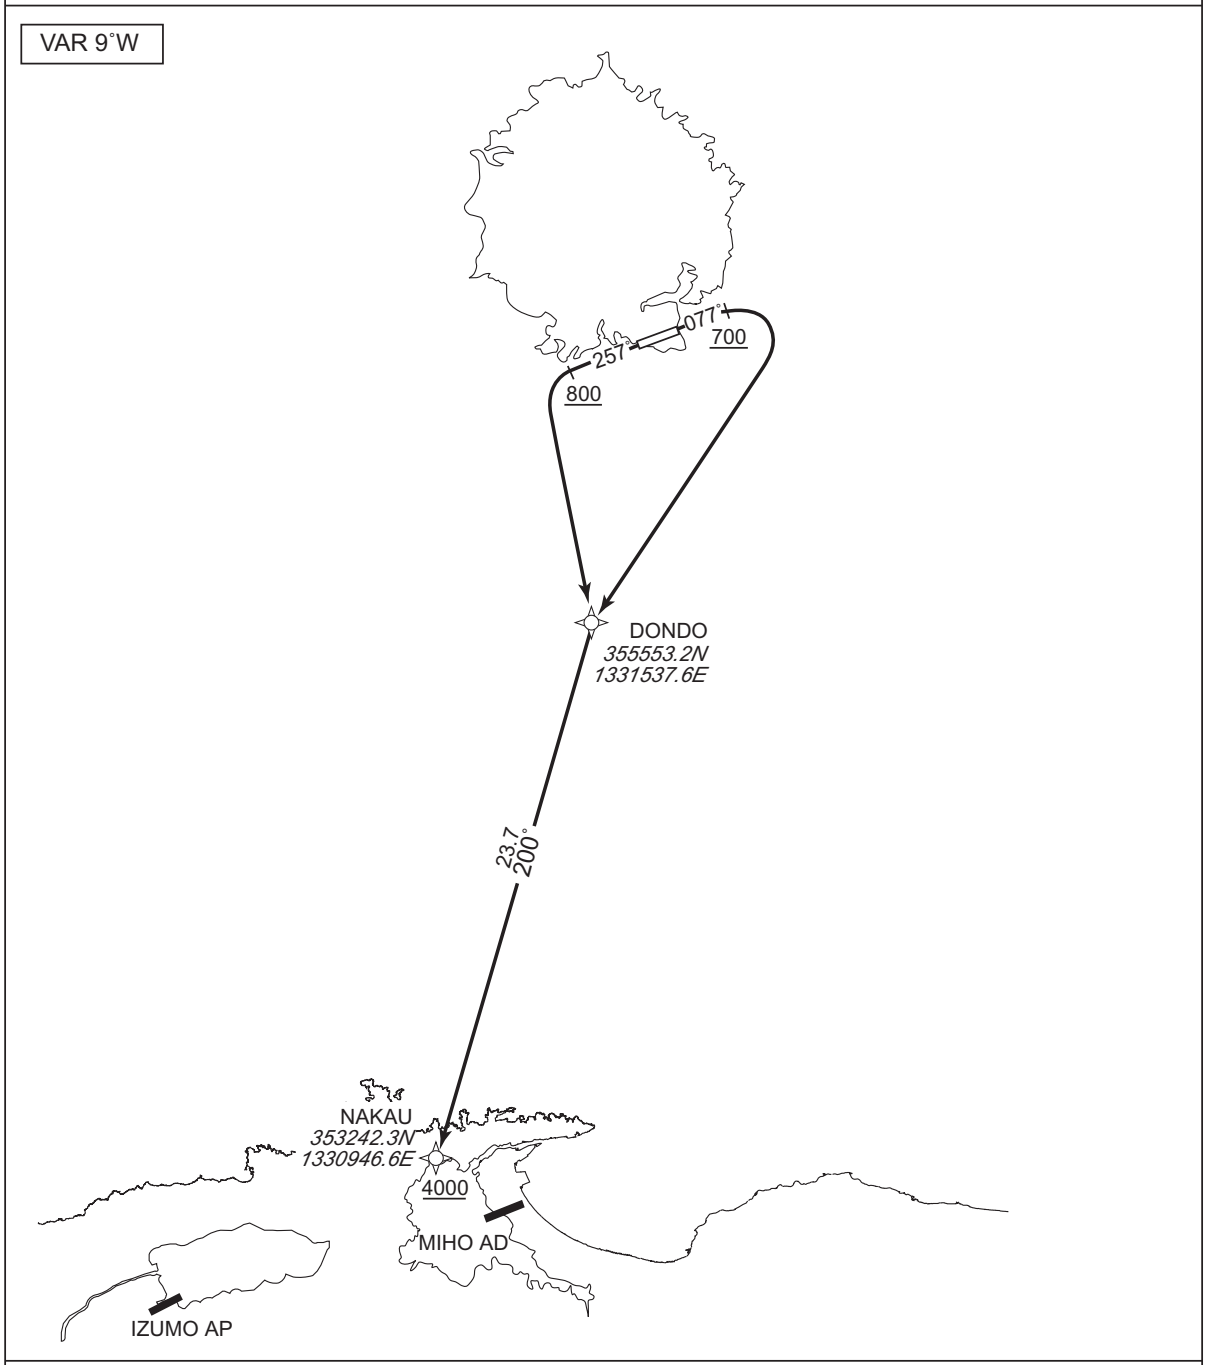

RWY08 : Climb on HDG 077˚ at or above 700FT, turn right direct to DONDO, to NAKAU at or above 4000FT.

RWY26 : Climb on HDG 257˚ at or above 800FT, turn left direct to DONDO, to NAKAU at or above 4000FT.

CHANGE : PROC renamed. PROC course. VAR.

STANDARD DEPARTURE CHART -INSTRUMENT

RJNO / OKI

RNAV SID

NAKAU TWO DEPARTURE

RWY08

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	077 (067.8)	-8.8	-	-	+700	-	-	RNP1
002	DF	DONDO	-	-	-8.8	-	R	-	-	-	RNP1
003	TF	NAKAU	-	200 (191.6)	-8.8	23.7	-	+4000	-	-	RNP1

RWY26

Serial Number	Path Descriptor	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed (KIAS)	Vertical Angle	Navigation Specification
001	VA	-	-	257 (247.8)	-8.8	-	-	+800	-	-	RNP1
002	DF	DONDO	-	-	-8.8	-	L	-	-	-	RNP1
003	TF	NAKAU	-	200 (191.6)	-8.8	23.7	-	+4000	-	-	RNP1

CHANGE : PROC renamed. PROC course. VAR.