


**INSTRUMENT
APPROACH
CHART - ICAO**


**MAGNITOGORSK, RUSSIA
MAGNITOGORSK
RNP RWY 36**

TOWER **120.800**

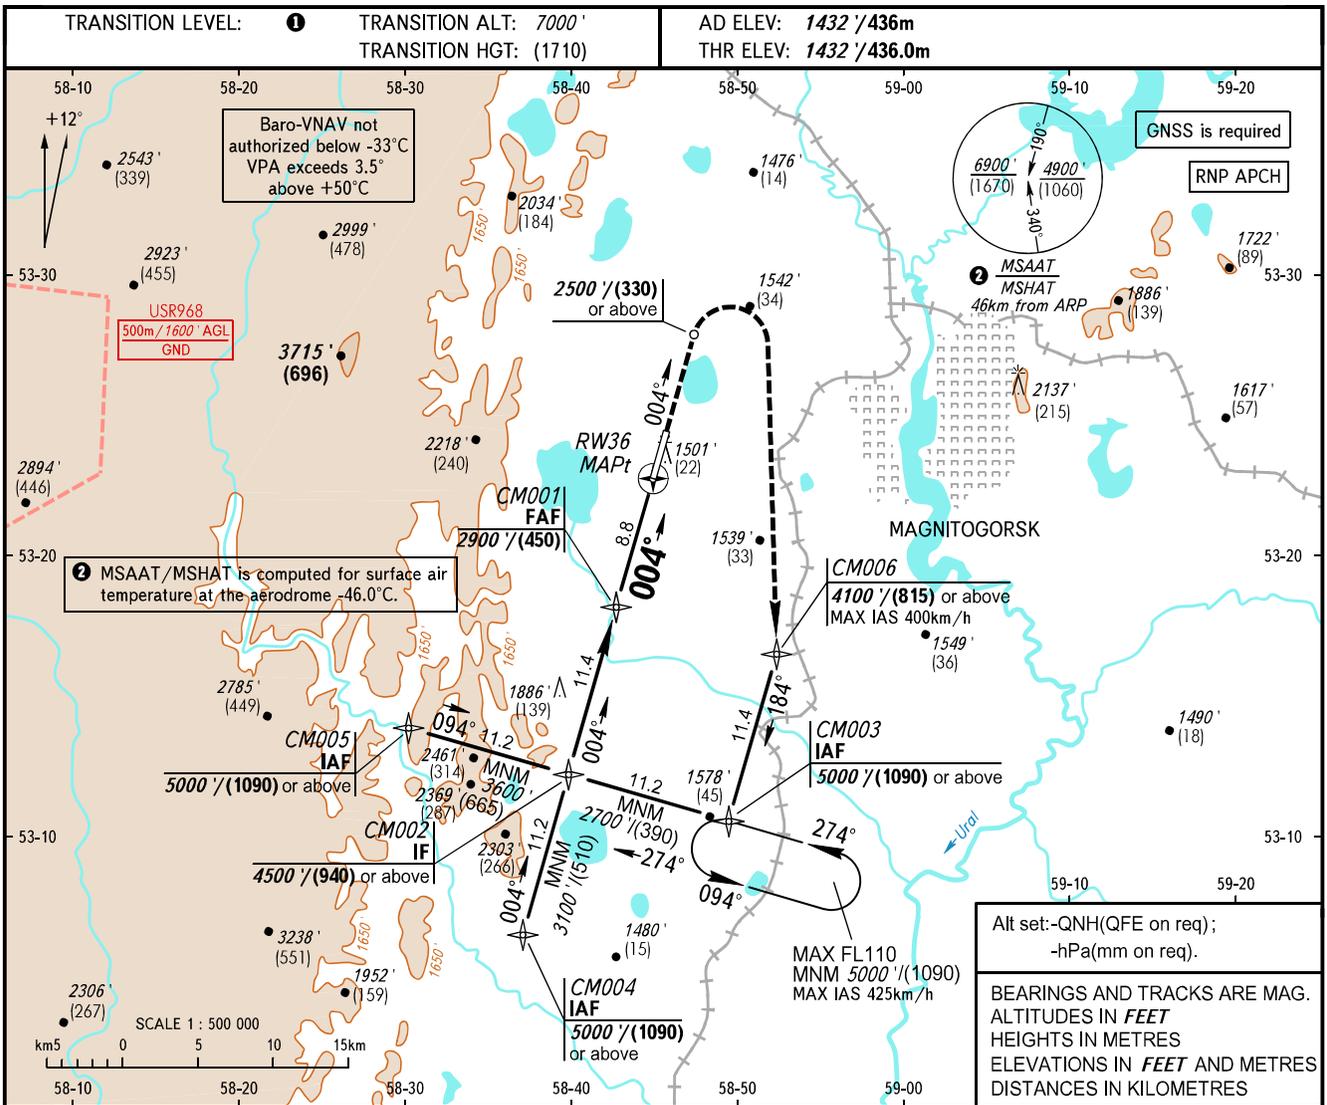

Alt set: -QNH(QFE on req);
-hPa(mm on req).
BEARINGS AND TRACKS ARE MAG.
ALTITUDES IN FEET
HEIGHTS IN METRES
ELEVATIONS IN FEET AND METRES
DISTANCES IN KILOMETRES

MISSED APPROACH
Climb straight ahead to 2500' / (330) or above, turn RIGHT to CM006 climbing to 4100' / (815) or above, then proceed to CM003 climbing to 5000' / (1090) or above, then proceed according to chart or to the holding area.

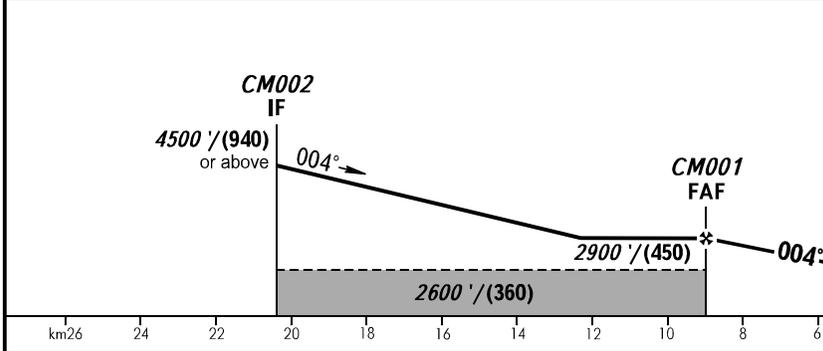

OCA(H)		A	B	C	D
Straight-in Approach	LNNAV	1750' (320') (100)	1750' (320') (100)	1750' (320') (100)	1750' (320') (100)
	LNNAV/VNAV	1700' (270') (85)	1710' (280') (90)	1730' (300') (95)	1730' (300') (95)
Circling		1830' (400') (125)	1930' (500') (155)	2090' (660') (205)	2270' (840') (260)

1 TRANSITION LEVEL:
- FL080 when QNH is 1013 hPa (760mm mercury column) or above;
- FL090 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL100 when QNH is less than 977 hPa (733mm mercury column).
NOTE
MAPt at RW36. Timing not authorized for defining MAPt.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
	RATE OF DESCENT	m/s	2.0	2.4	2.7	3.1	3.5	3.9	4.3	4.7
	ft/min	386	462	540	617	694	771	848	925	1002

CHANGE: New chart