


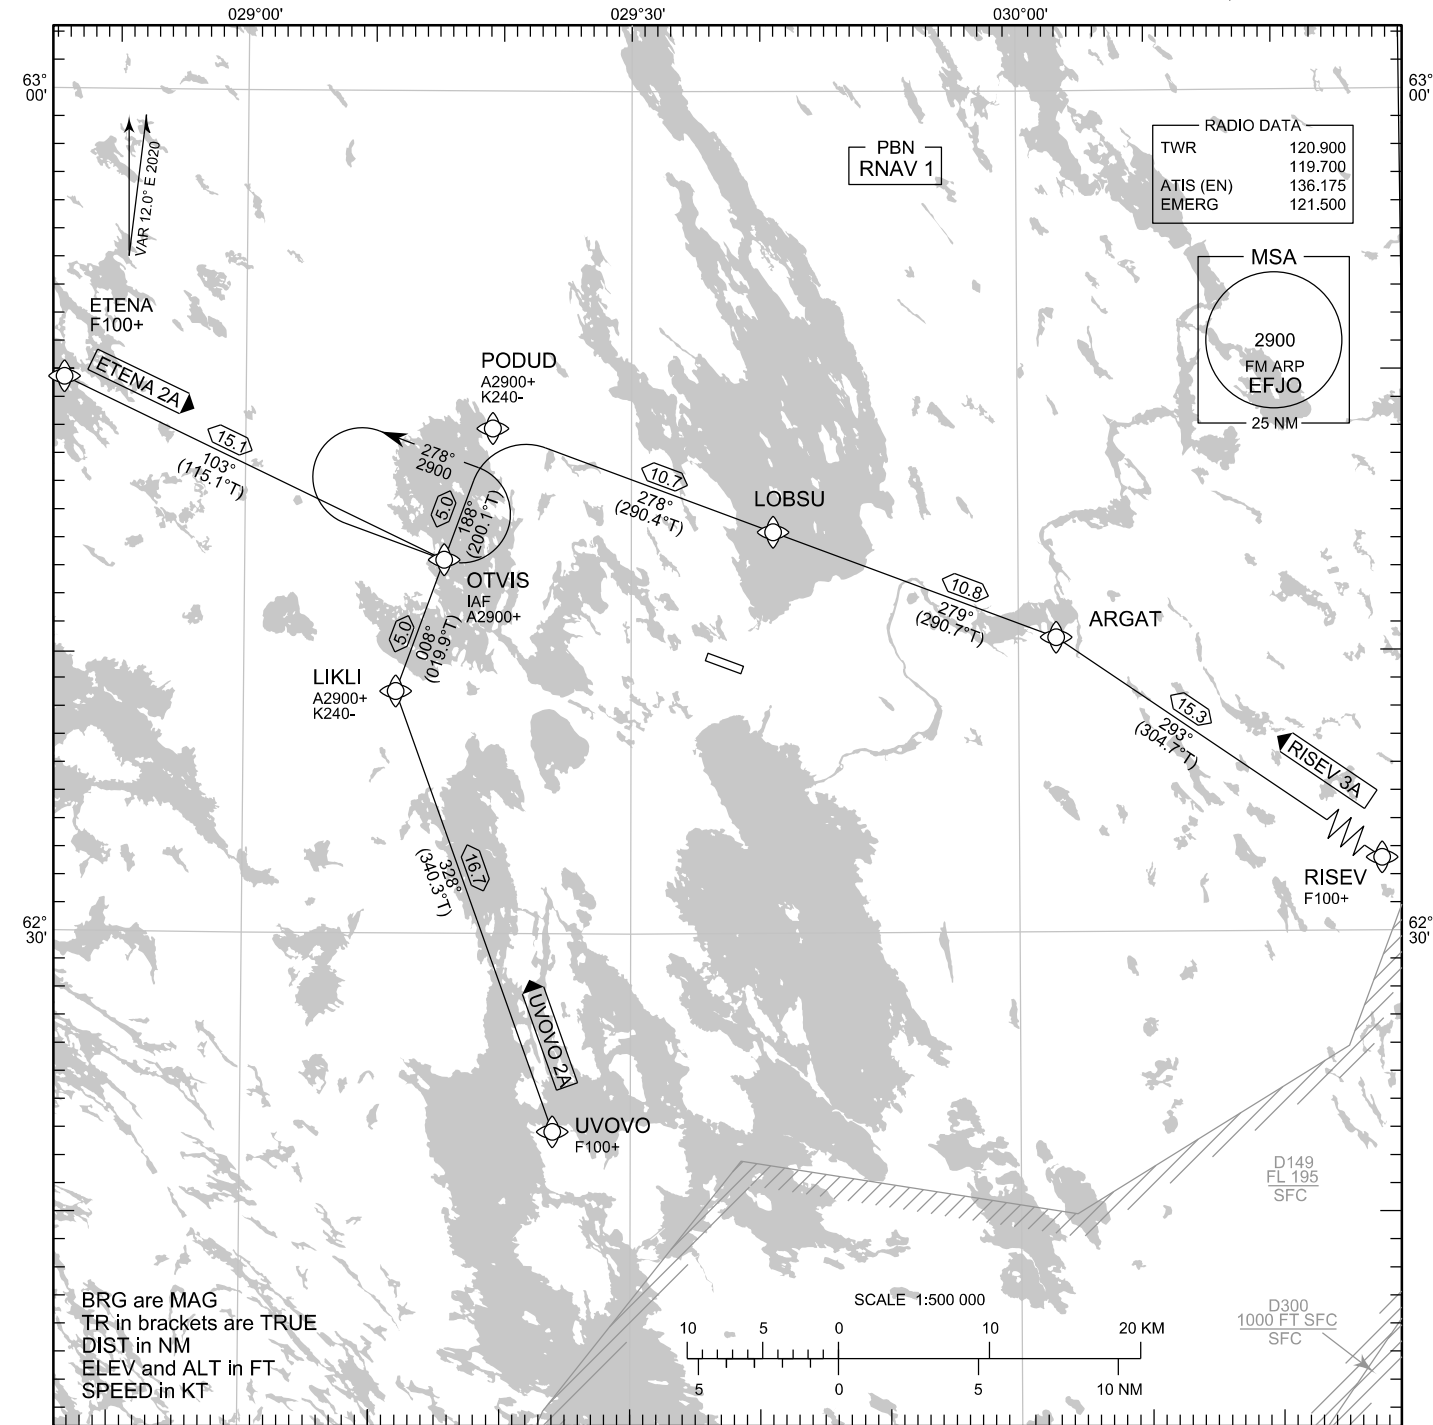

RNAV STAR RWY 10
ETENA 2A RISEV 3A UVOVO 2A

DME/DME OPS:	NOT SUPPORTED	RCF:	SELECT TRANSPONDER CODE 7600
ROUTES:	RNAV PROC CODING ON THE VERSO OF THE CHART ATC WILL GIVE DESCENT CLEARANCES	RNAV STAR HAS BEEN GIVEN AND ACKNOWLEDGED:	FOLLOW THE STAR TO THE RESPECTIVE RWY AND EXECUTE IAP AND LAND
WPT CONSTRAINTS:	ALT / FL / SPEED CONSTRAINTS MUST ALWAYS BE FOLLOWED AS PUBLISHED UNLESS EXPLICITLY CANCELLED BY ATC	AREA MNM ALT:	SEE AMA INDEX, AIP ENR 6.1 - 3
CD OPS:	BY ATC CLR IF TFC PERMITS. PLAN CD PATH ACCORDING TO STAR		
NOISE ABATEMENT:	AVOID OVERFLYING THE CITY OF JOENSUU BELOW 2000		

EFJO RNAV STAR RWY 10										
RTE NAV SPEC	SEQ NR	P/T	WPT		MAG	GEO TR	DIST NM	Constraints		
			ID	Flyover				LVL	LVL	Speed
ETENA 2A RNAV 1	010	IF	ETENA	-	-	-	-	F100+		
	020	TF	OTVIS	-	103°	115.1°T	15.1	A2900+		

RISEV 3A RNAV 1	010	IF	RISEV	-	-	-	-	F100+		
	020	TF	ARGAT	-	293°	304.7°T	15.3			
	030	TF	LOBSU	-	279°	290.7°T	10.8			
	040	TF	PODUD	-	278°	290.4°T	10.7	A2900+		K240-
	050	TF	OTVIS	-	188°	200.1°T	5.0	A2900+		

UVOVO 2A RNAV 1	010	IF	UVOVO	-	-	-	-	F100+		
	020	TF	LIKLI	-	328°	340.3°T	16.7	A2900+		K240-
	030	TF	OTVIS	-	008°	019.9°T	5.0	A2900+		

RNAV Holdings									
ID	INBD TR	INBD MAG	Turn Direction	Speed	MNM HLDG LVL	TIME	DIST NM		
OTVIS	110.3°T	098°	Left	K230-	A2900	1 MIN	-		

WPT COORD
SEE PAGE EFJO AD 2.15 - 1