

AERODROME CHART-ICAO

405450N
0243711E

ELEV 5.41m
17.7ft

KAVALA / MEGAS ALEXANDROS Airport


-ELEVATIONS AND DIMENSIONS IN METRES
-BEARINGS ARE MAGNETIC
-COORDINATES IN WGS 84

ATS COMMUNICATION FACILITIES			
Service Designation	Call Sign	Frequency	Remarks
APP	KAVALA APPROACH	124.650 MHz	Cov. FL 250/50NM
		122.100 MHz	RGA
		257.800 MHz	MIL RGA
		121.500 MHz	Emergency Frequency
TWR	MEGAS ALEXANDROS TOWER	118.400 MHz	Cov. FL 80/16NM
		122.100 MHz	RGA
		257.800 MHz	MIL RGA
		121.500 MHz	Emergency Frequency
G/A/G	MEGAS ALEXANDROS RADIO	5637 KHz	0400 - 1700
		2989 KHz	1700 - 0400
ATIS (ARR/DEP)	KAVALA MEGAS ALEXANDROS AIRPORT INFORMATION	128.155 MHz	Cov. FL 200/ 60 NM

All ATS Communication Facilities under responsibility of HASP
For ATIS see also ENR 1.1.

↑
VAR 6 E
ANNUAL RATE
OF CHANGE 6'30"E

KAVALA
L 327
KHR
405536.77N
0243757.35E

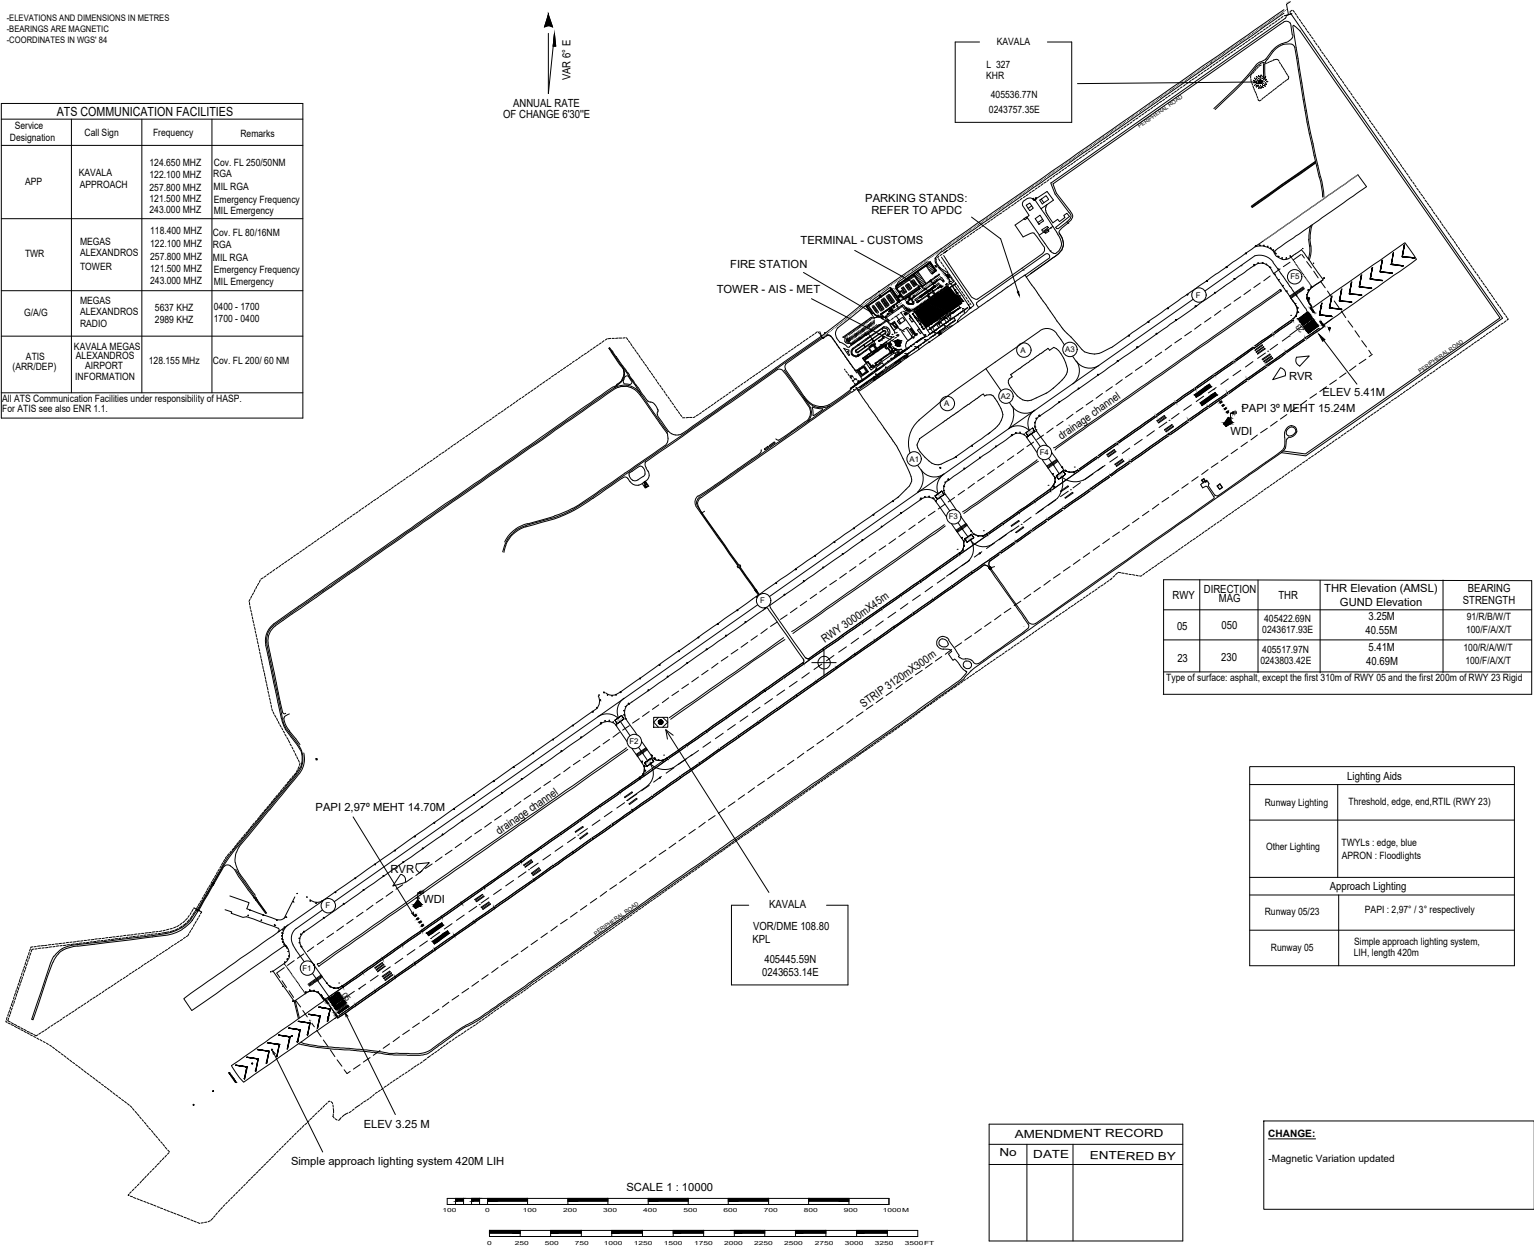

RWY	DIRECTION MAG	THR	THR Elevation (AMSL) GUND Elevation	BEARING STRENGTH
05	050	405422.69N 0243617.93E	3.25M 40.55M	91°R/B/W/T 100°F/A/X/T
23	230	405517.97N 0243603.42E	5.41M 40.69M	100°R/A/W/T 100°F/A/X/T

Type of surface: asphalt, except the first 310m of RWY 05 and the first 200m of RWY 23 Rigid

Lighting Aids	
Runway Lighting	Threshold, edge, end, RTIL (RWY 23)
Other Lighting	TWYs : edge, blue APRON : Floodlights
Approach Lighting	
Runway 05/23	PAPI : 2,97" / 3" respectively
Runway 05	Simple approach lighting system, LIH, length 420m

AMENDMENT RECORD		
No	DATE	ENTERED BY

CHANGE:
-Magnetic Variation updated