


INSTRUMENT APPROACH CHART-ICAO

AD ELEV 291
HEIGHTS RELATED
TO THR 29 ELEV 290

OSIJEK APPROACH	128.350
OSIJEK APPROACH ALTN	125.850
OSIJEK TOWER	128.350

OSIJEK / Klisa (LDOS)

ILS y or LOC y RWY 29

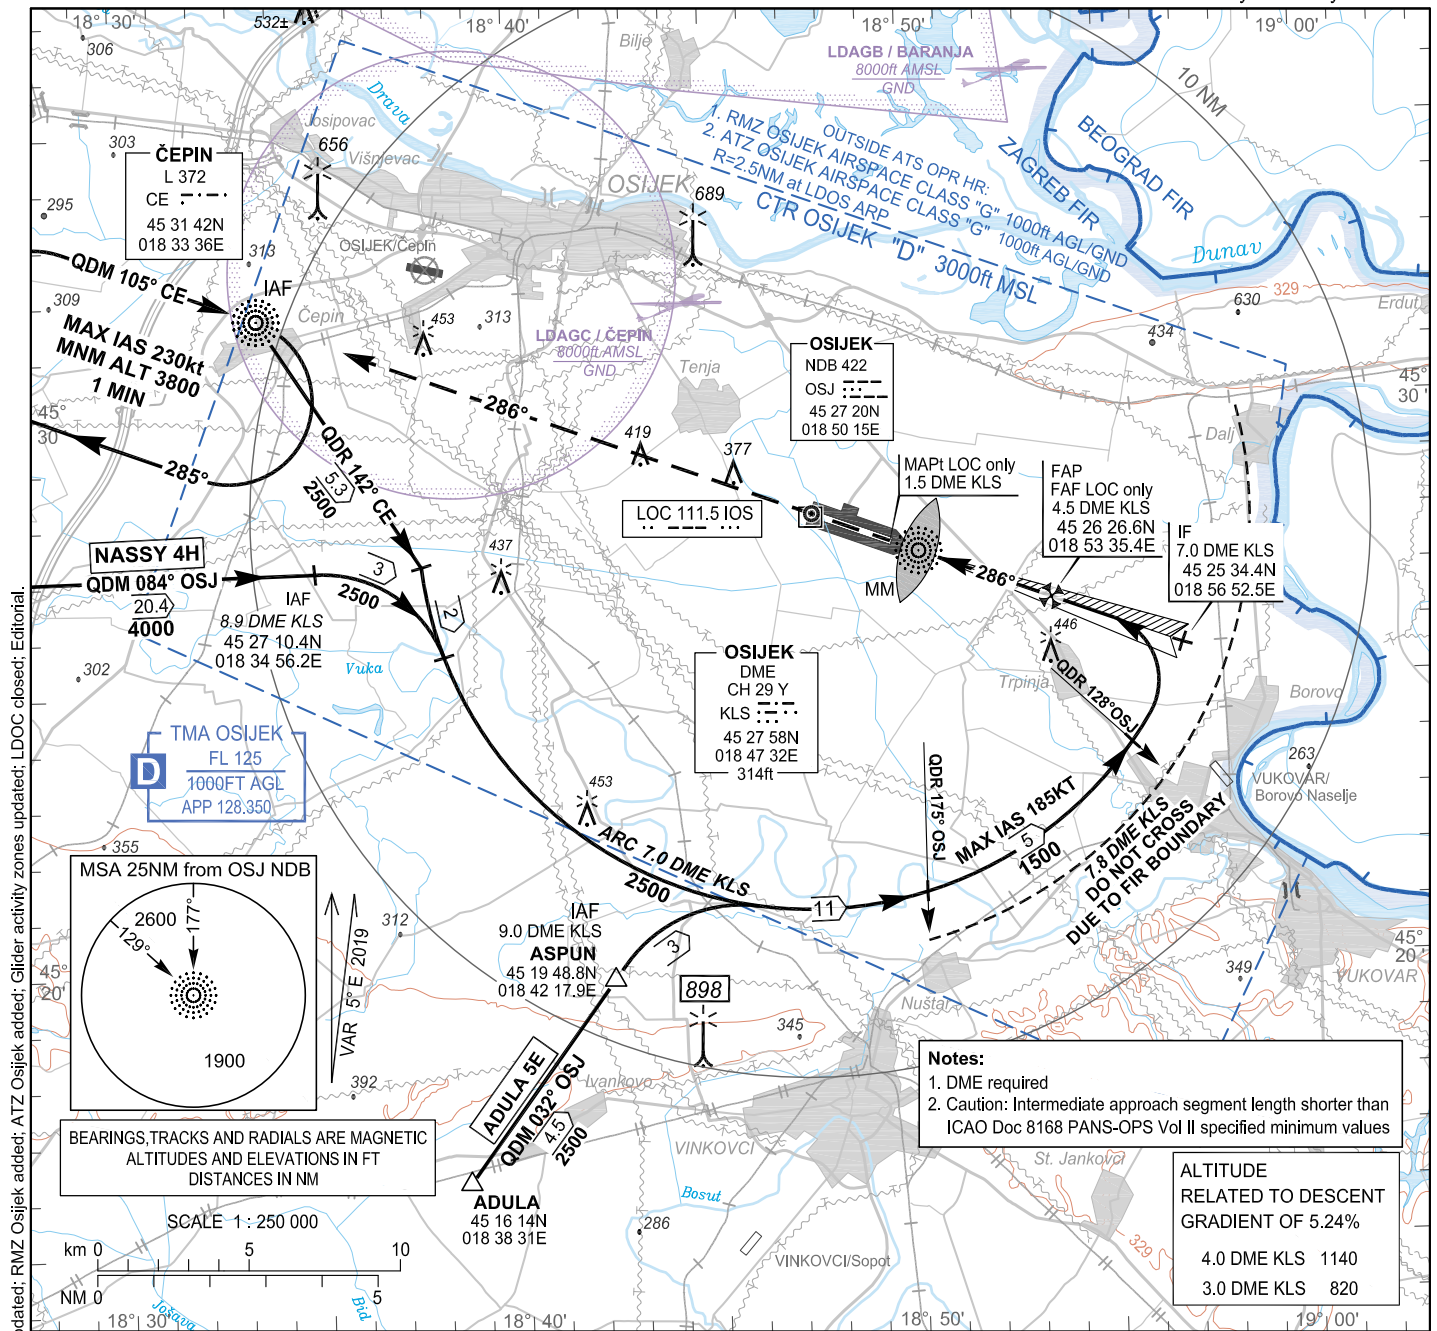


Notes:

1. DME required
2. Caution: Intermediate approach segment length shorter than ICAO Doc 8168 PANS-OPS Vol II specified minimum values

ALTITUDE RELATED TO DESCENT GRADIENT OF 5.24%	
4.0 DME KLS	1140
3.0 DME KLS	820

TRANSITION ALT 10 000

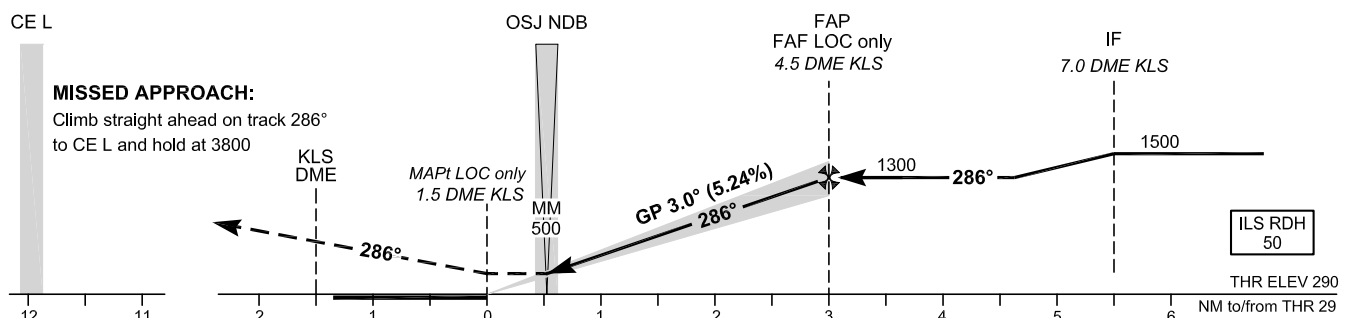

OCA(H)		A	B	C	D
Straight-in Approach	ILS CAT I press. altim.	428 (138)	438 (148)	448 (158)	468 (178)
	LOC only	620 (330)			
Circling		690 (400)	790 (500)	890 (600)	1090 (800)

FAF LOC only to MAPt DISTANCE – 3.0 NM Timing not authorized for defining the MAPt						
GS (kt)	80	100	120	140	160	180
min:sec	2:15	1:48	1:30	1:17	1:08	1:00
Rate of descent (ft/min)	425	531	637	743	849	955

CHANGE: Call signs and frequencies updated; TMA Osijek vertical limit updated; RMZ Osijek added; ATZ Osijek added; Glider activity zones updated; LDOC closed; Editorial.