


**INSTRUMENT
APPROACH
CHART - ICAO**


RADAR **126.100**
START **118.200**

**TYUMEN, RUSSIA
ROSHCHINO
NDB RWY 12**

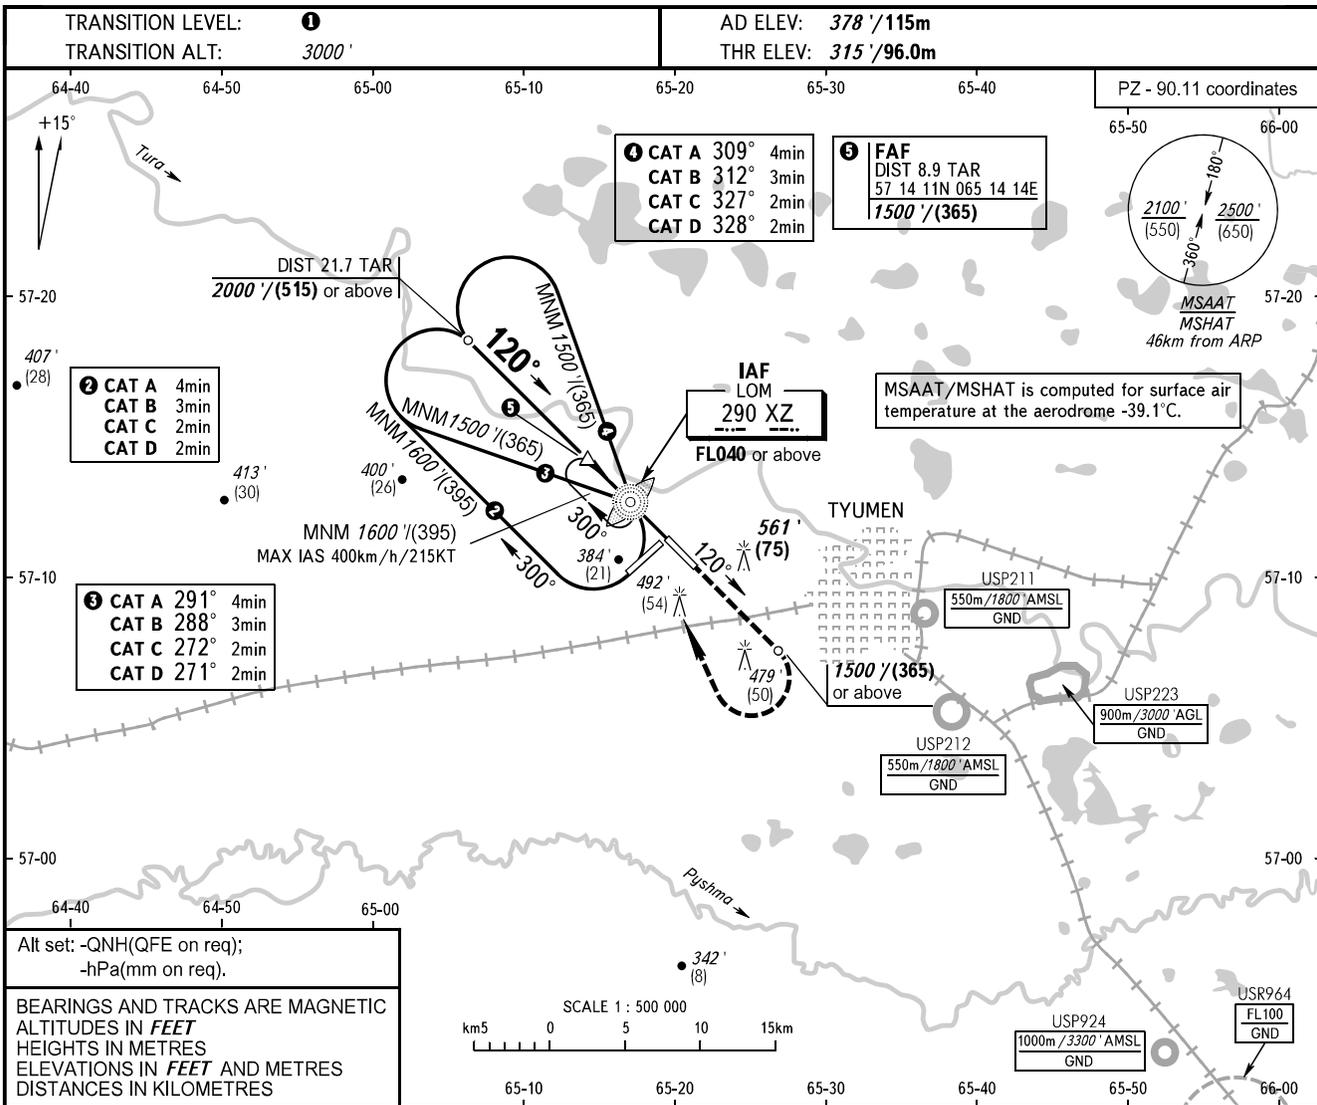

Alt set: -QNH(QFE on req);
-hPa(mm on req).

BEARINGS AND TRACKS ARE MAGNETIC
ALTITUDES IN **FEET**
HEIGHTS IN METRES
ELEVATIONS IN **FEET** AND METRES
DISTANCES IN KILOMETRES

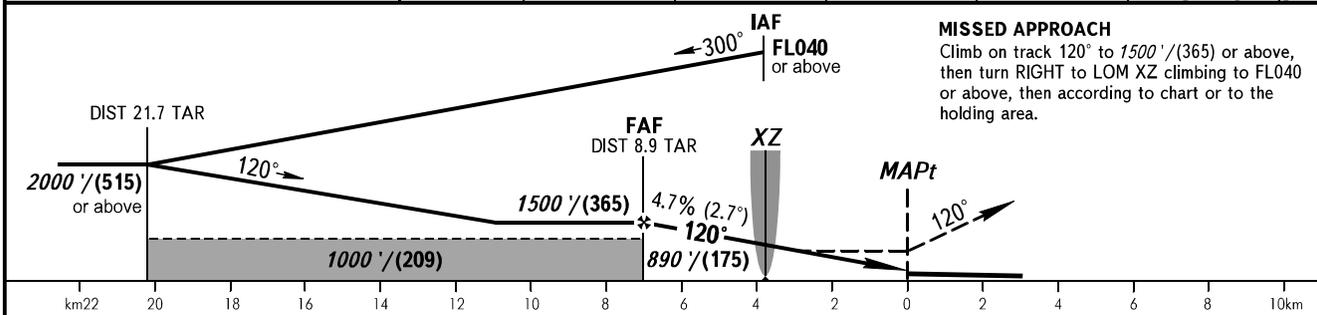

MISSED APPROACH
Climb on track 120° to 1500'/(365) or above, then turn RIGHT to LOM XZ climbing to FL040 or above, then according to chart or to the holding area.

OCA(H)	A	B	C	D
Straight-in Approach	680' (370') (112)	680' (370') (112)	680' (370') (112)	680' (370') (112)
Circling	780' (410') (125)	870' (500') (150)	970' (600') (185)	1070' (690') (215)

TRANSITION LEVEL:
- FL040 when QNH is 1013 hPa (760mm mercury column) or above;
- FL050 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL060 when QNH is less than 977 hPa (733mm mercury column).

NOTE
Turn before passing MAPt is PROHIBITED.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390	420	450
FAF - MAPt 7360m	min:sec	2:57	2:27	2:06	1:50	1:39	1:28	1:20	1:14	1:08	1:03	0:59
RATE OF DESCENT	m/s	1.9	2.3	2.7	3.1	3.5	3.9	4.3	4.7	5.0	5.4	5.8
	ft/min	374	453	532	610	689	768	847	925	984	1063	1142

CHANGE: New chart