


INSTRUMENT APPROACH CHART

RJAA / NARITA INTL

ILS Z RWY16L


TOKYO APP 124.4 – 127.7 120.2 – 225.65	ILS – LOC 110.7 ITM ILS – GP 330.2 ILS – DME CH-44X	NARITA TOWER 118.35 – 122.7 – 126.2 236.8 – 121.85G	RADAR AVBL ATIS 128.25
----------------------------------------------	--------------------------------------------------------------	-----------------------------------------------------------	---------------------------

Simultaneous approach authorized with RWY16R

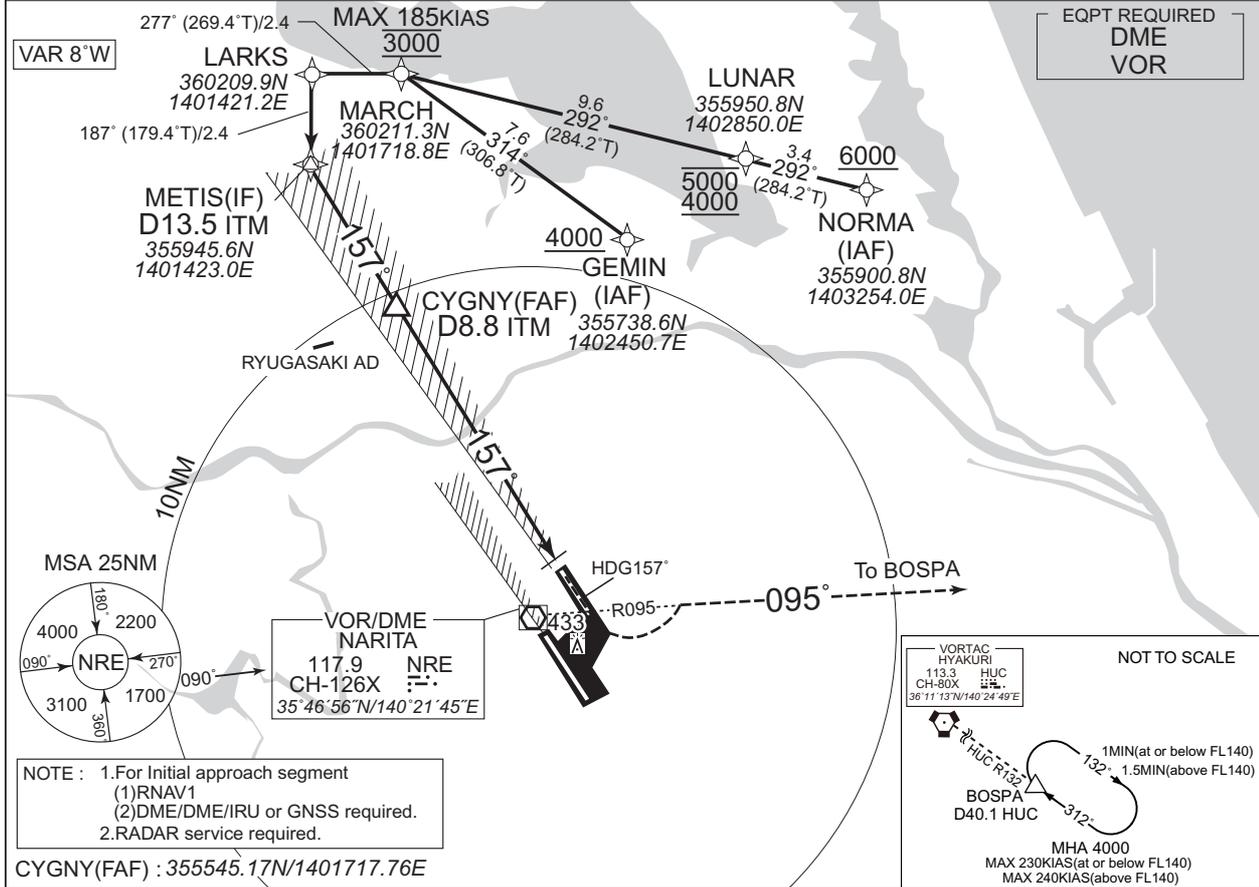

NOTE : 1.For Initial approach segment
(1)RNAV1
(2)DME/DME/IRU or GNSS required.
2.RADAR service required.

CYGN Y (FAF) : 355545.17N/1401717.76E

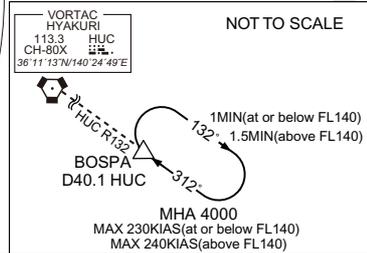

MISSED APPROACH

Climb to 600FT on HDG157°,
turn left, climb to 8000FT
via NRE R095 to BOSPA
and hold.
Contact TOKYO APP.

13.5 8.8 4.33
13.3 8.6 DME to ITM
NM to THR

CHANGE : HLDG pattern(BOSPA).

MINIMA	THR elev. 135	AD elev. 135		
CAT	CAT I		CIRCLING	
	DA(H)	RVR/CMV	MDA(H)	VIS
A	335 (200)	550	730 (595)	1600
B				2400
C				2400
D				3200