FORT CAMPBELL, KENTUCKY

RNAV (GPS) RWY 23

WAAS Chan 56203 W23A	APCH CRS 225°	Rwy Idg 10,926 TDZE 571 Arpt Elev 571

[USA] CAMPBELL AAF (KHOP)

RNP APCH - GPS

T * When ALS inop, increase RVR to 40, vis to ¾ mile.
** When ALS inop, increase RVR to 55, vis to 1 mile.
*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CDE RVR to 60, vis to 1⅛ miles.
**** Circling NA SE of Rwy 5-23.

SSALR (A3)

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct CHNUK and hold.

ATIS	APP CON	TOWER	GND CON	CLNC DEL	ASR/PAR
125.175 308.4	118.1 269.525	120.9 278.8	121.8 266.8	138.8	

For uncompensated BARO-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F).

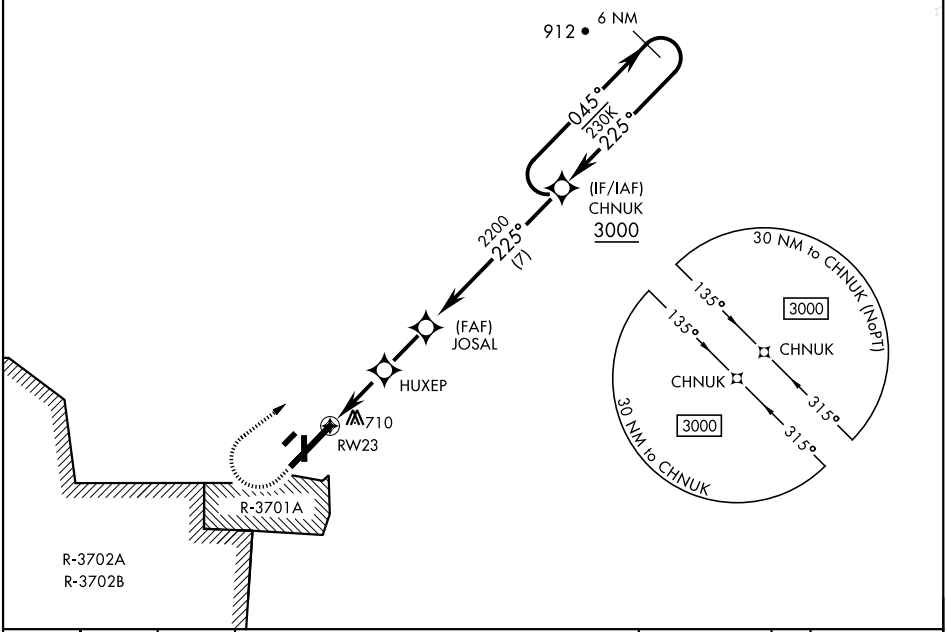

1000 | 3000 | CHNUK

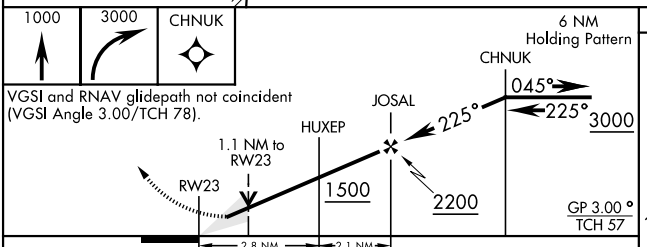

ELEV 571 TDZE 571



HIRL all rwys

CATEGORY	A	B	C	D	E
LPV DA *	771/24		200	(200-½)	
LNAV/VNAV DA **	949/35		378	(400-⅝)	
LNAV MDA ***	960/24 389 (400-½)		960/35 389 (400-¾)		
C CIRCLING ****	1060-1 489 (500-1)		1060-1½ 489 (500-1½)	1140-2 569 (600-2)	

SE-1, 20 MAR 2025 to 17 APR 2025