


CHANGES: RESTRICTED AREA BIR2 REMOVED



RCF:

TRANSITION ALT 7000

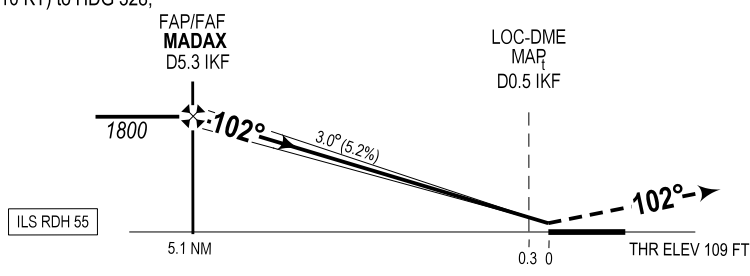

DME IKF	5	4	3	2	1
ALTITUDE	1720	1400	1080	760	440

Timing not authorized for defining MAP.

GS	kt	80	100	120	140	160	180
FAF-MAP _f (4.8 NM)	MIN:SEC	3:34	2:51	2:22	2:02	1:47	1:35
Rate of descent (5.2%)	ft/MIN	430	540	640	750	860	960

BIKF ILS or LOC RWY 10 - TRANSITIONS

Recommended Coding Table

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course / Track °M(°T)	Magnetic Variation	Distance	Turn Direction	Altitude (ft)	Speed (kt/h)	VPA/ TCH	Navigation Specification
010	IF	SONAX	-		+12.0			A3000+	-220		RNAV 1(GNSS)
020	TF	KFI10	-	032 (019.6)	+12.0	5.0	R	A2200+	-200		RNAV 1(GNSS)
010	IF	VESOX	-		+12.0			A3000+	-220		RNAV 1(GNSS)
020	TF	KFI10	-	102 (089.5)	+12.0	5.0		A2200+	-200		RNAV 1(GNSS)
010	IF	NONBO	-		+12.0			A3000+	-220		RNAV 1(GNSS)
020	TF	KFI10	-	172 (159.6)	+12.0	5.0	L	A2200+	-200		RNAV 1(GNSS)
030	TF	MADAX	-	102 (089.7)	+12.0	3.7		A1800+			RNAV 1(GNSS)

Waypoint coordinates

Waypoint Identifier	Coordinates		Display	
	LAT	LON	LAT	LON
SONAX	635422.83N	0230300.79W	N 6354.38	W 02303.01
VESOX	635902.27N	0231033.14W	N 6359.04	W 02310.55
NONBO	640344.79N	0230309.57W	N 6403.75	W 02303.16
KFI10	635904.46N	0225912.31W	N 6359.07	W 02259.21
MADAX	635905.50N	0225051.01W	N 6359.09	W 02250.85