

AERODROME CHART



ATIS 127.4
TWR 118.2(130.0)
GND 121.6

ZUXC XICHANG/Qingshan

N27° 59.4'E102° 11.0' ELEV 1559.2m

RWY	Direction	Bearing strength
18	179°	PCR 800/R/A/W/T: RWY18/36 CONC PCR 730/R/A/W/T: TWY A(BTN A1 & C), A1, B
36	359°	PCR 640/R/A/W/T: TWY A(BTN A2 & C), A2, C, D, E, F, G

BEARINGS ARE MAGNETIC.
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS.

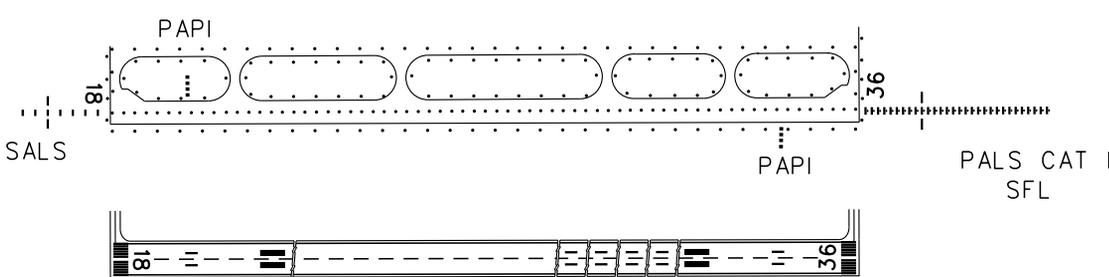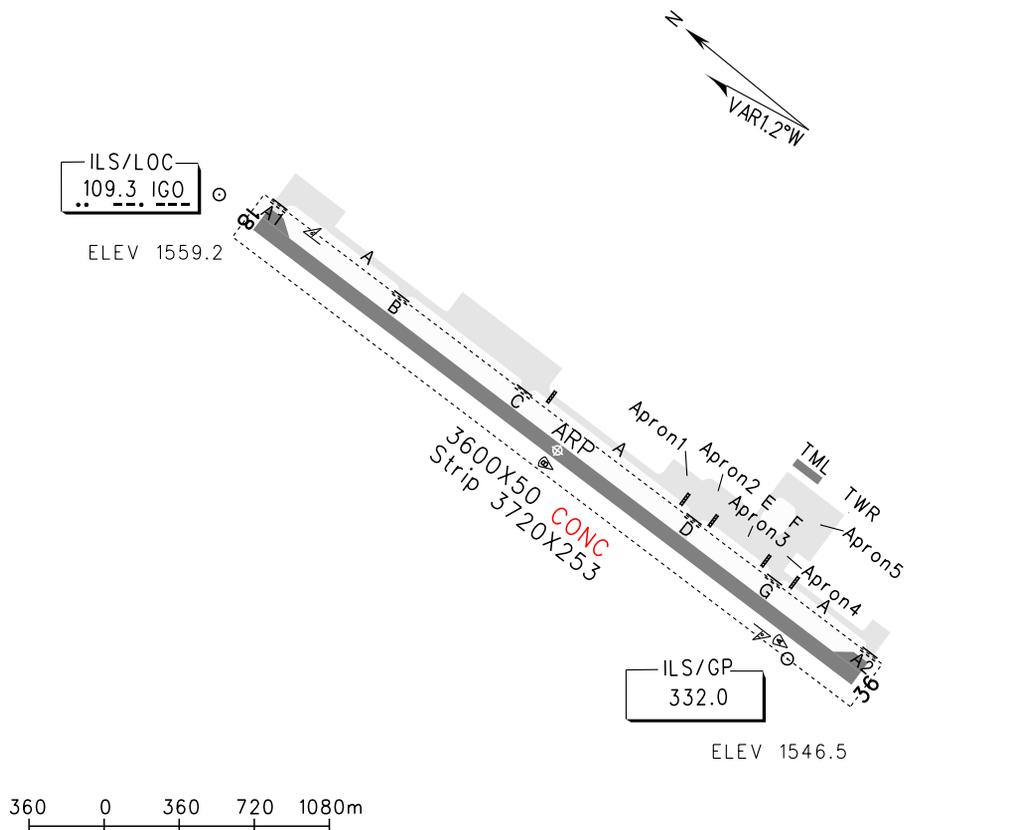

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)					LIGHTS	
ACFT Type	RWY18		RWY36		RWY18	RWY36
	REDL	NIL(Day only)	REDL	NIL(Day only)		
2 TURB ENG or 3&4 ENG	A				SALS PAPI REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL
	B	RVR400	RVR1600	RVR400		
	C	VIS800	VIS1600	VIS800		
	D					
Other 1&2 ENG	RVR1600/VIS1600					

Note: TAKE-OFF MINIMA of RWY36 is CLG 540m, VIS 5000m if climb gradient is less than 6.2%.

Changes: PCR