


TRANSITION ALTITUDE
8000 FT

ATIS
126.455

ANDRAVIDA APP 121.125
KEFALLINIA TWR 122.250

21°00'E RUTOM 3E, LATAN 3E, KFN 2E, ROTSA 1E, GARTA 2E, ARA 3E

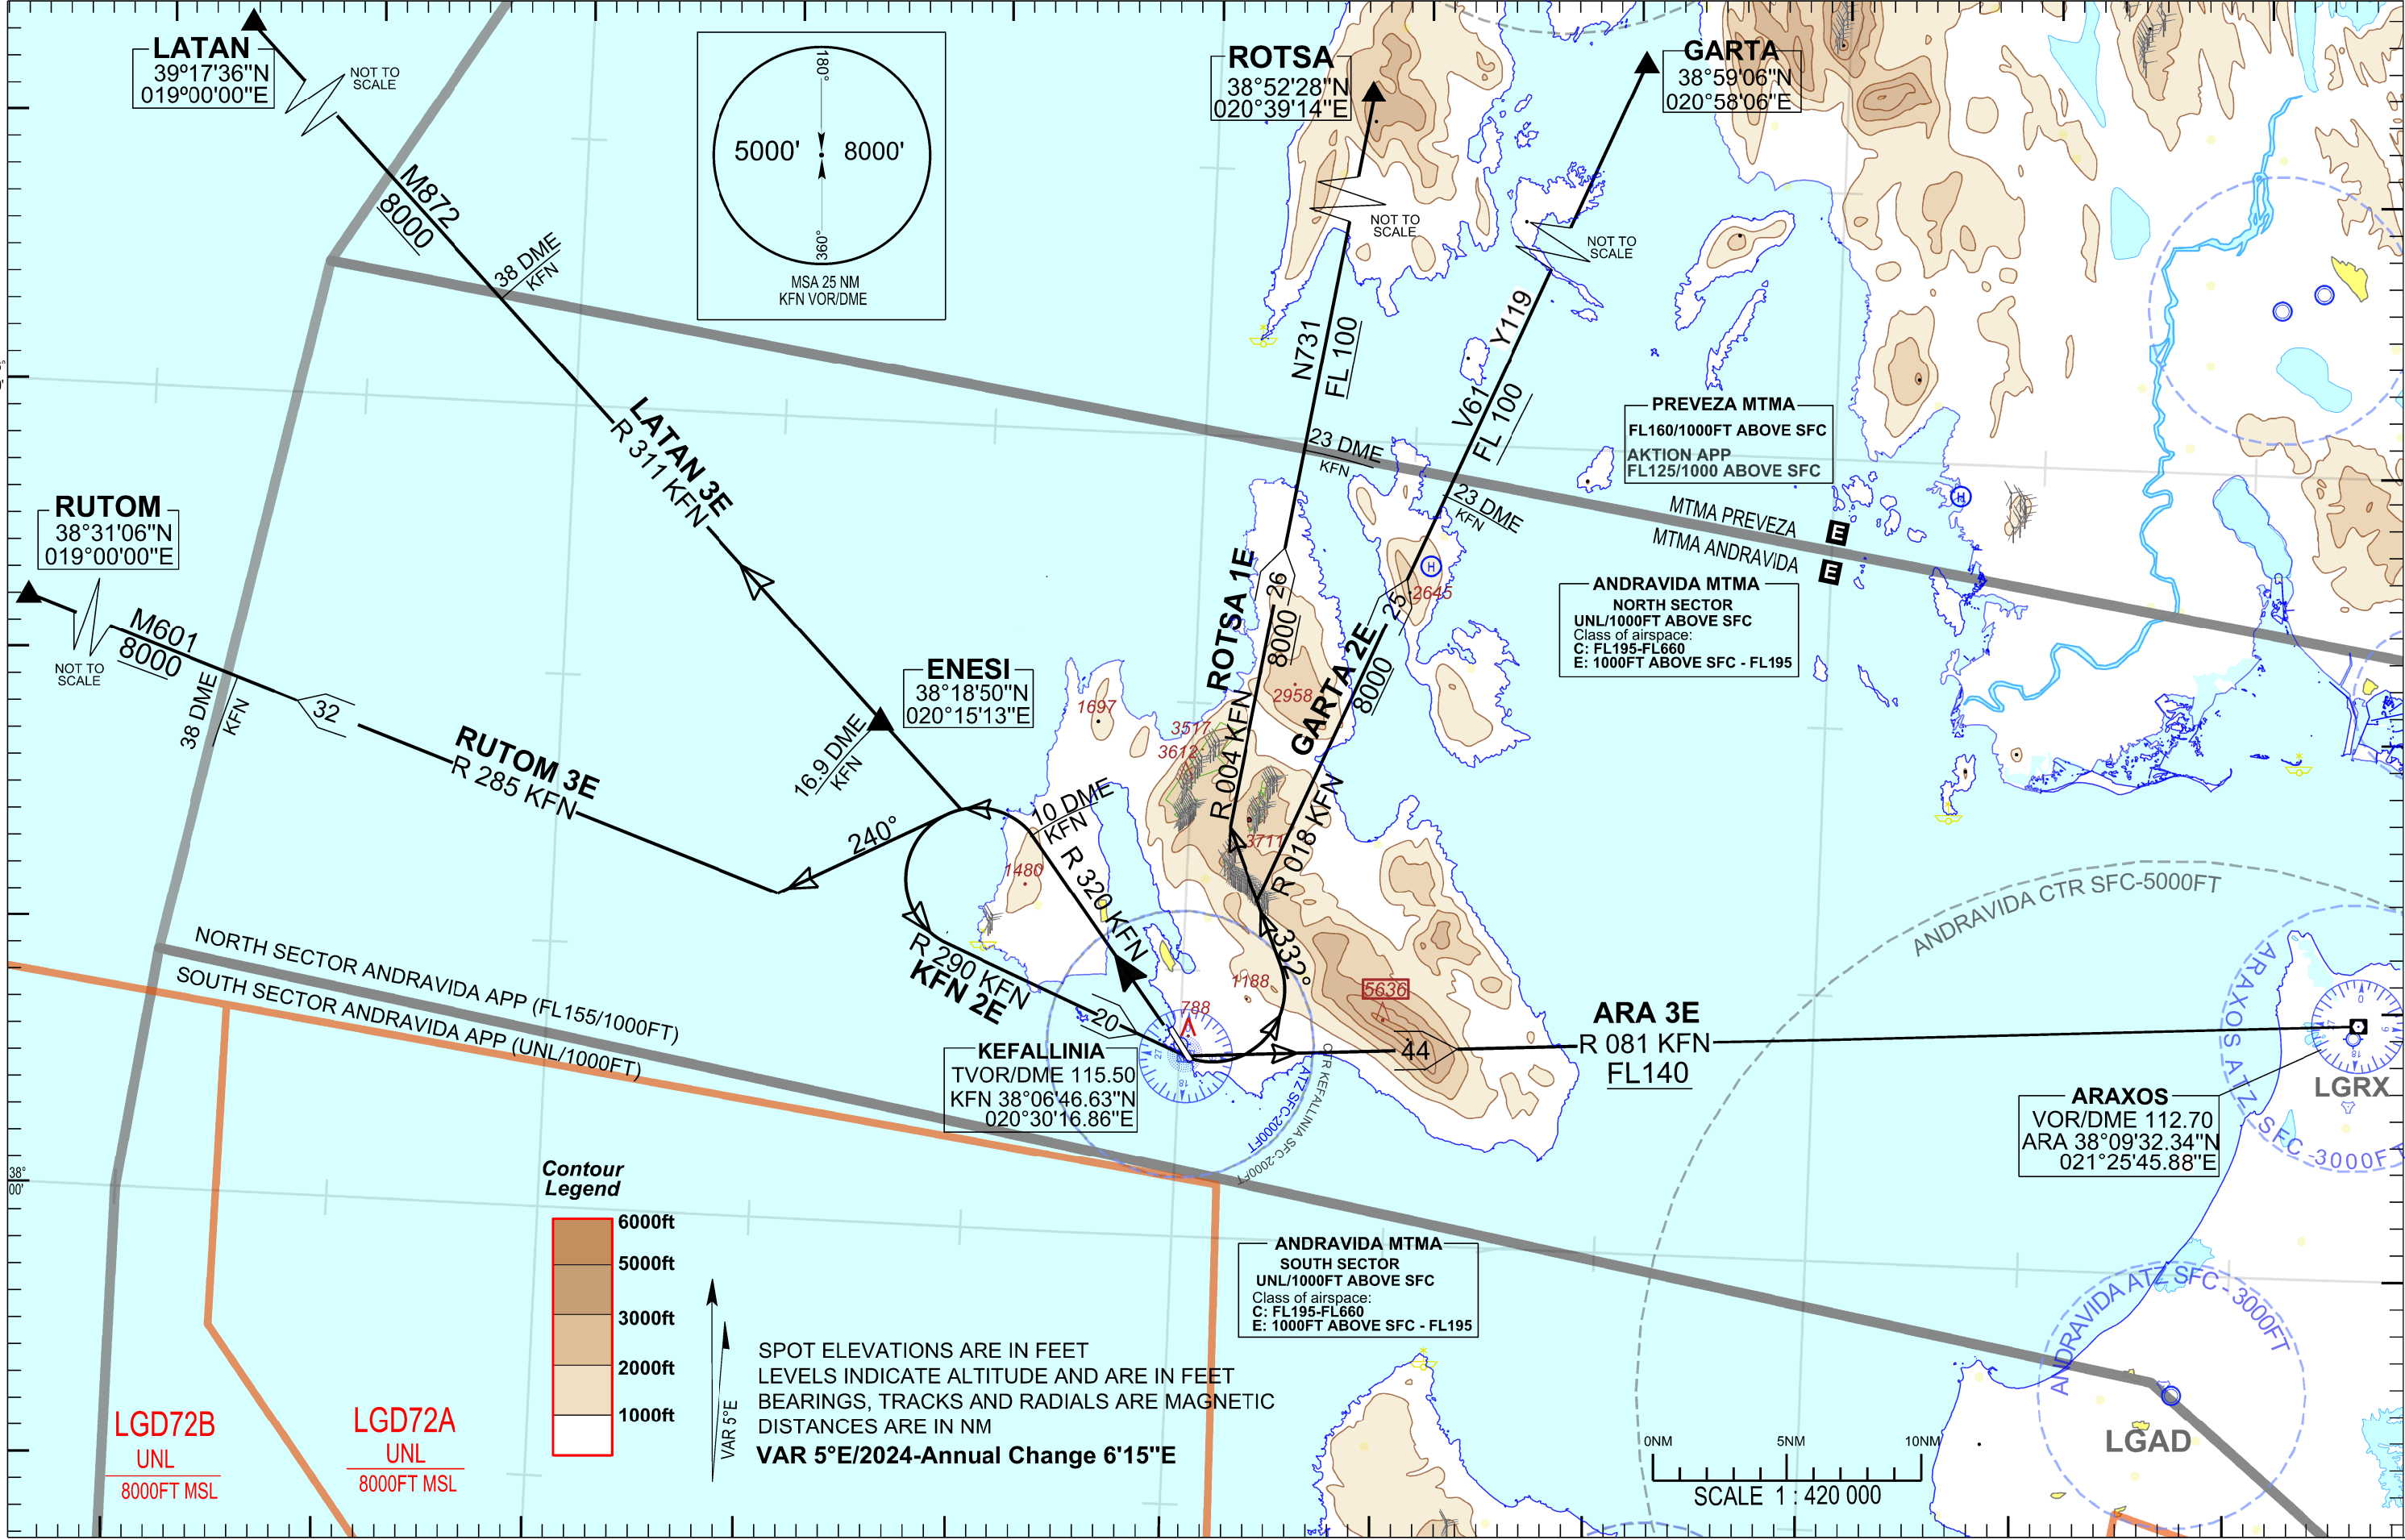

KEFALLINIA / ANNA POLLATOU AIRPORT

KFN VOR/DME
RWY 32

SIDs : ARA 3E, KFN 2E, ROTSA 1E, GARTA 2E, RUTOM 3E, LATAN 3E,

GENERAL:

- When for these SIDs an altitude higher than the transition altitude is designated, then ATC unit shall specify an equivalent flight level.
- For this SIDs a visual climb up to 200 ft is required and then continue with the minimum PDG (Procedure Design Gradient) as described in the following table.

DESIGNATOR	DESCRIPTION	MAX IAS/ BANK ANGLE	MIN CLIMB GRADIENT (PDG)	ALTITUDES
ARA 3E	“Climb on RDL 320 KFN. At RDL 320 KFN / 10 DME. Fix turn left, intercept and follow RDL 290 KFN to KFN. Then turn left, intercept and follow RDL 081 KFN and proceed to ARA.”	210KT/15 ⁰ until the turn at RDL 320 KFN / 10 DME. Fix is completed	5 % (304 ft / NM) up to FL 090	Cross KFN at FL 090 or above. Cross ARA FL 140 or above.
KFN 2E	“Climb on RDL 320 KFN. At RDL 320 KFN / 10 DME. Fix turn left, intercept and follow RDL 290 KFN to KFN and then to assigned route by ATC unit”	210KT/15 ⁰ until the turn at RDL 320 KFN / 10 DME. Fix is completed.	4.7 % (286 ft / NM) up to 8000 ft (QNH) or above	Cross KFN at 8000 FT (QNH) or above.
RO TSA 1E	“Climb on RDL 320 KFN. At RDL 320 KFN / 10 DME. Fix turn left, intercept and follow RDL 290 KFN to KFN. Then turn left to track 332 ⁰ , intercept and follow RDL 004 KFN to join AWY N 731 and proceed to ROTSA.”	210KT/15 ⁰ until the turn at RDL 320 KFN / 10 DME. Fix is completed. 230KT/25 ⁰ until the turn over KFN is completed.	4.7 % (286 FT / NM) up to FL 100 or above	Cross KFN at 8000 FT (QNH) or above. Cross RDL 004 KFN / 23DME. Fix at FL 100 or above.
GARTA 2E	“Climb on RDL 320 KFN. At RDL 320 KFN / 10 DME. Fix turn left, intercept and follow RDL 290 KFN to KFN. Then turn left to track 332 ⁰ , intercept and follow RDL 018 KFN to join AWY V61/Y119 and proceed to GARTA.”	210KT/15 ⁰ until the turn at RDL 320 KFN / 10 DME. Fix is completed. 230KT/25 ⁰ until the turn over KFN is completed.	4.7 % (286 FT / NM) up to FL 100 or above	Cross KFN at 8000 FT (QNH) or above. Cross RDL 018 KFN / 23DME. Fix at FL 100 or above.
RUTOM 3E	“Climb on RDL 320 KFN. At RDL 320 KFN / 10 DME. Fix turn left to track 240 ⁰ , intercept and follow RDL 285 KFN to join AWY M 601 and proceed to RUTOM.”	210KT/15 ⁰ until the turn at RDL 320 KFN / 10 DME. Fix is completed.	4.7 % (286 FT/NM) up to 8000 FT (QNH)	Cross RDL 285 KFN / 38DME. Fix at 8000 FT (QNH) or above.
LATAN 3E	“Climb on RDL 320 KFN. At RDL 320 KFN / 10 DME. Fix turn left, intercept and follow RDL 311 KFN to join AWY M 872 and proceed to LATAN.”	210KT/15 ⁰ until the turn at RDL 320 KFN / 10 DME. Fix is completed.	4.7 % (286 FT/NM) up to 8000 FT (QNH)	Cross RDL 311 KFN / 38DME. Fix at 8000 FT (QNH) or above.

PDG	GROUND SPEED	100	120	140	160	180	200
5.0% (304 FT/NM)	ROC (FT/Min)	506	608	709	810	911	1013
4.7% (286 FT/NM)	ROC(FT/Min)	476	571	666	762	856	952