

WAAS CH 77620 W05A	APP CRS 054°	Rwy Idg TDZE 1199 Apt Elev 1226
--	------------------------	---

RNAV (GPS) RWY 5

AKRON-CANTON RGNL(CAK)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct EGGII and on track 048° to ACO VOR/DME and hold.

ATIS 121.05	CLEVELAND APP CON * 125.5 269.25	AKRON-CANTON TOWER 134.75 279.575	GND CON 121.7 348.6	CLNC DEL 132.05
-----------------------	--	---	-------------------------------	---------------------------

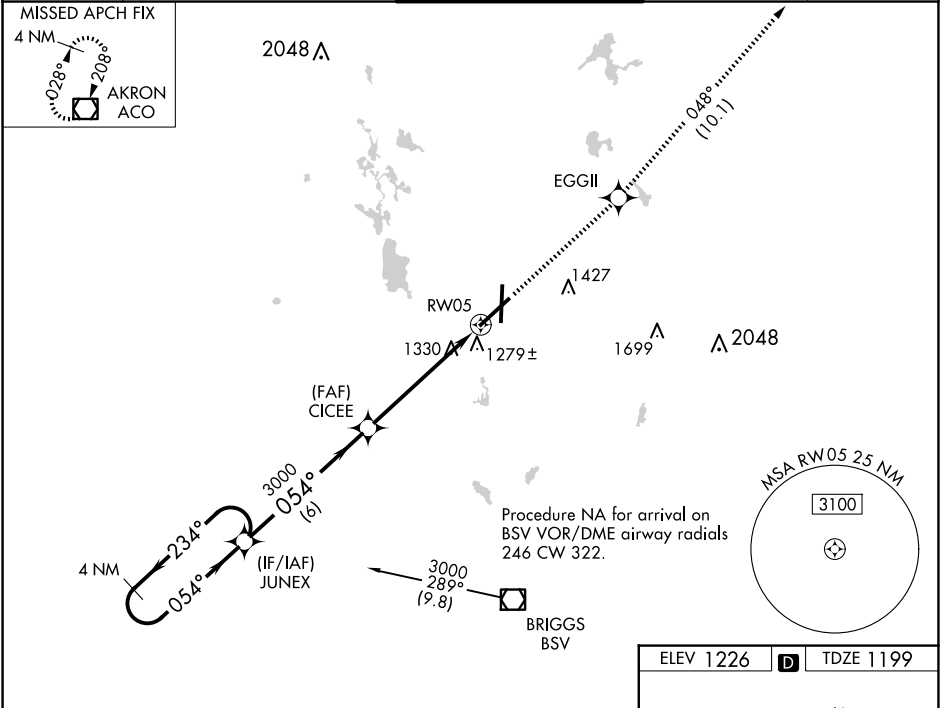

4 NM Holding Pattern				
GP 3.00° TCH 50				
CATEGORY	A	B	C	D
LPV DA**	1399/24		200 (200-½)	
LNAV/VNAV DA	1577/50		378 (400-1)	
LNAV MDA	1640/24	441 (500-½)	1640/40 441 (500-¾)	1640/50 441 (500-1)
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)

