

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 50

**APP Ancona APP
TWR Falconara TWR**

**125.325
119.805**

**ANCONA/FALCONARA LIPY
ILS or LOC-X RWY 22**

DOC 8168 ED.6 - 2014 AMDT 8

CHANGE: REPRINTING




TRANSITION ALT 6000

MISSED APPROACH: Continue climbing to 3000 ft. Passing 1000 ft turn left on TR 136° (IAS MAX 185 kt) until joining RDL 187 ANC VOR bound to ARKEM holding pattern. Hold on RDL 173 ANC VOR between 8 NM and 12 NM ANC DME, IAS MAX 200 kt (left turns).

- (1) MM provided also by D0.8 IFA DME or D4.8 FAL TACAN
- (2) OM replaced by D5 IFA DME or D9.0 FAL TACAN

REMARK: Missed Approach obstacle clearance provided by 2.5% gradient, 5% gradient required to remain inside vertical limits of CTR Zone 2 (controlled airspace)

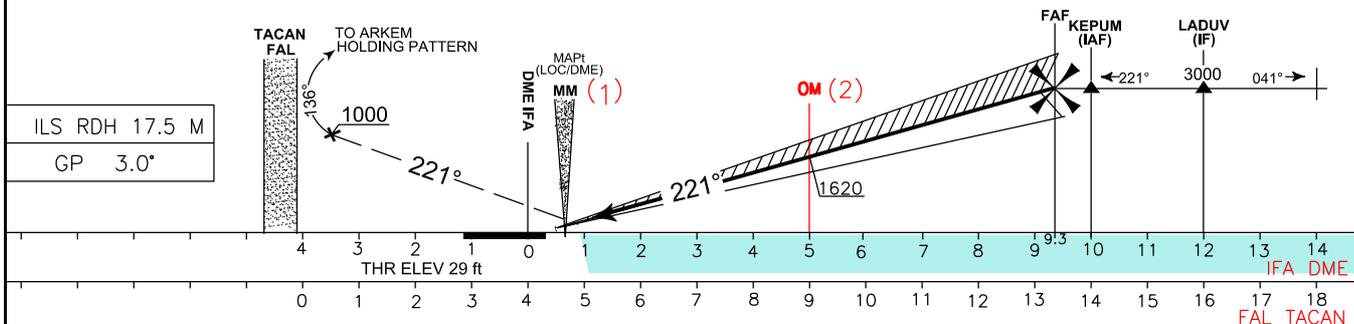

OCA (OCH)		A	B	C	D	WARNING: CIRCLING RWY04 (North-west of RWY only) must be performed avoiding API industrial plant	FT PER MIN	GS	D5 IFA-MM	MM-THR	DME IFA	ALT (HGT)	MNM SECT ALT ANC	VOR
STRAIGHT IN APPROACH	ILS	321 (292)	331 (302)	341 (312)	351 (322)		318	60	4 : 16	0 : 34	9	2891(2862)		
	LOC/DME	470 (441)					477	90	2 : 51	0 : 22	6	1937(1908)		
CIRCLING (see WARNING) NW of RWY only		750 (700)		1120 (1070)	1180 (1130)		636	120	2 : 08	0 : 17	5	1620(1591)		
						795	150	1 : 43	0 : 13	3	983 (954)			
						954	180	1 : 25	0 : 11	2	665 (636)			