


ICAO - INSTRUMENT APPROACH CHART

DOC.8168-ED.6-2014-AMDT 7

CHANGE: MAG VAR UPDATED, PRS VORDME INDICATIONS WITHDRAWN

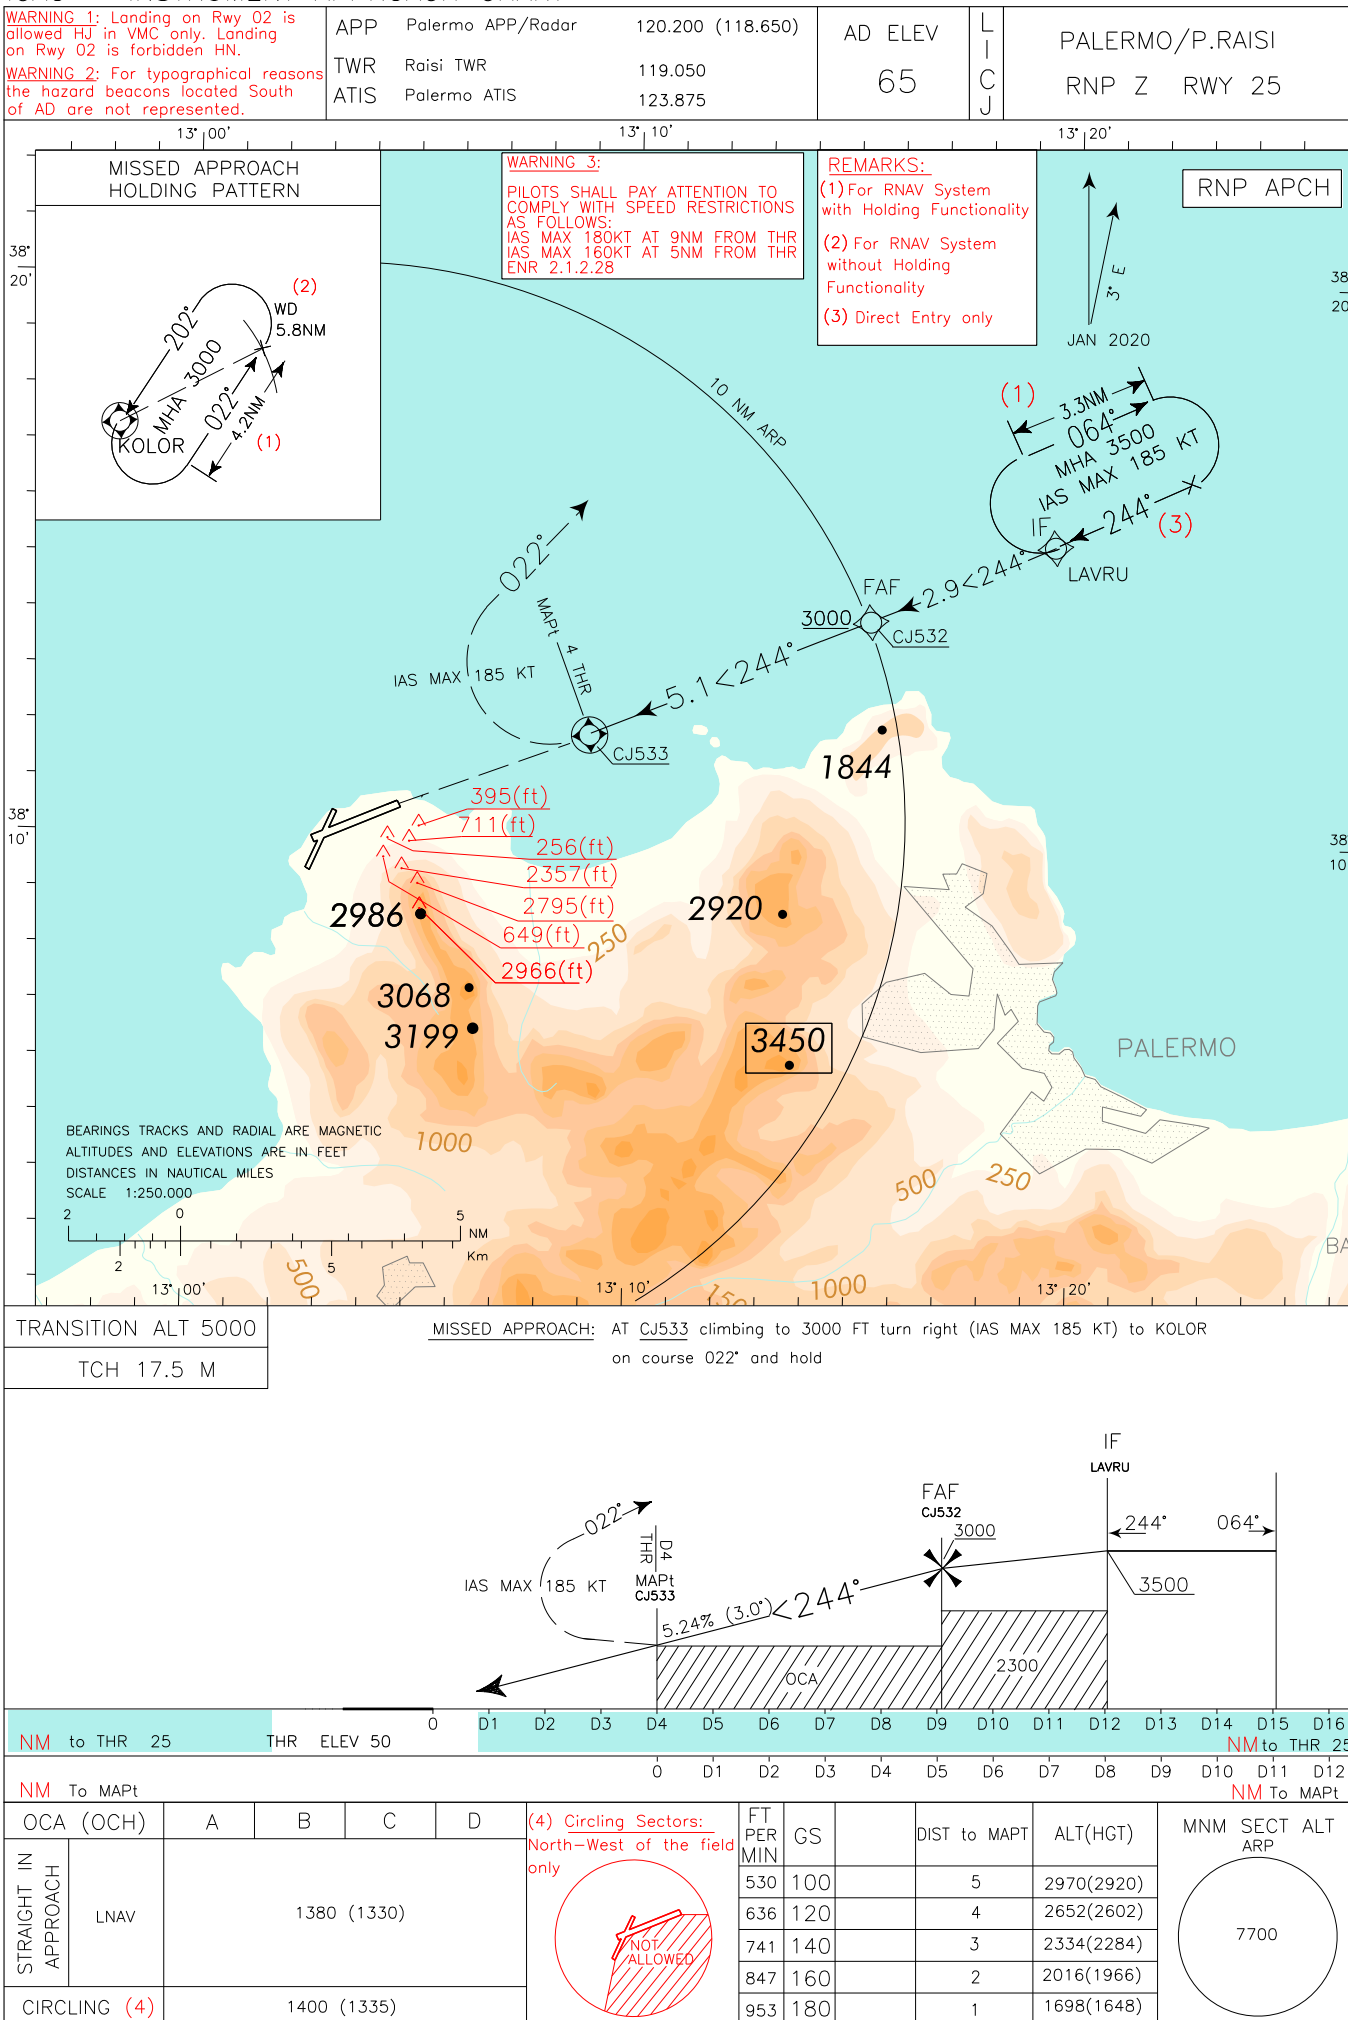

TABULAR DESCRIPTION

Palermo RNP Z RWY25 – Instrument Approach Procedure

Path Terminator	Waypoint Identifier	Inbound Course °M (°T)	Leg Distance (NM) (1)	Timing(min.)/ Waypoint Distance (NM) (2)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FL)	Speed Limit (kt)	Magnetic Variation (°)	Navigation Specification
HM (3)	LAVRU	244°(247°)	3.3	- / -	R	+3500	-	-185	3°	RNAV 1

Serial Number	Path Terminator	Waypoint Identifier	Fly Over	Course °M(°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed Limit (kt)	VPA/ TCH	Navigation Specification
010	IF	LAVRU	-	-	-	-	-	+3500	-	-	RNAV 1
020	TF	CJ532	-	244°(247.0°)	-	2.9	-	+3000	-	-	RNP APCH
030	TF	CJ533	Y	244°(246.9°)	-	5.1	-	@1380	-	-	RNP APCH
-	-	THR25	-	-	-	-	-	+107.8	-	-3°/17.5M	-
040	CF	KOLOR	-	022°(025.2°)	3°	-	R	+3000	-185	-	RNP APCH
050	HM	KOLOR	Y	202°(205°)	-	-	L	+3000	-	-	RNAV 1

Path Terminator	Waypoint Identifier	Inbound Course °M (°T)	Leg Distance (NM) (1)	Timing(min.)/ Waypoint Distance (NM) (2)	Turn Direction	Minimum Altitude (FT)	Maximum Altitude (FL)	Speed Limit (kt)	Magnetic Variation (°)	Navigation Specification
HM	KOLOR	202°(205°)	4.2	- / 5.8	L	+3000	-	-	3°	RNAV 1

- (1) RNAV system with holding functionality
 (2) RNAV system without holding functionality
 (3) Direct Entry Only

WAYPOINT LIST
RNP Z RWY 25

Waypoint Identifier	Coordinates
CJ532	38°14'40.87" N 013°17'47.23" E
CJ533	38°12'41.24" N 013°11'49.58" E