


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 4848 ft
HEIGHTS RELATED TO
THR RWY 35 - ELEV 4775 ft

TWR: 118.7 237.6
APP: 119.7 349.5
SMC: 121.9 335.3
ATIS: 127.05

TAIF/Taif Intl (OETF)

VOR RWY 35

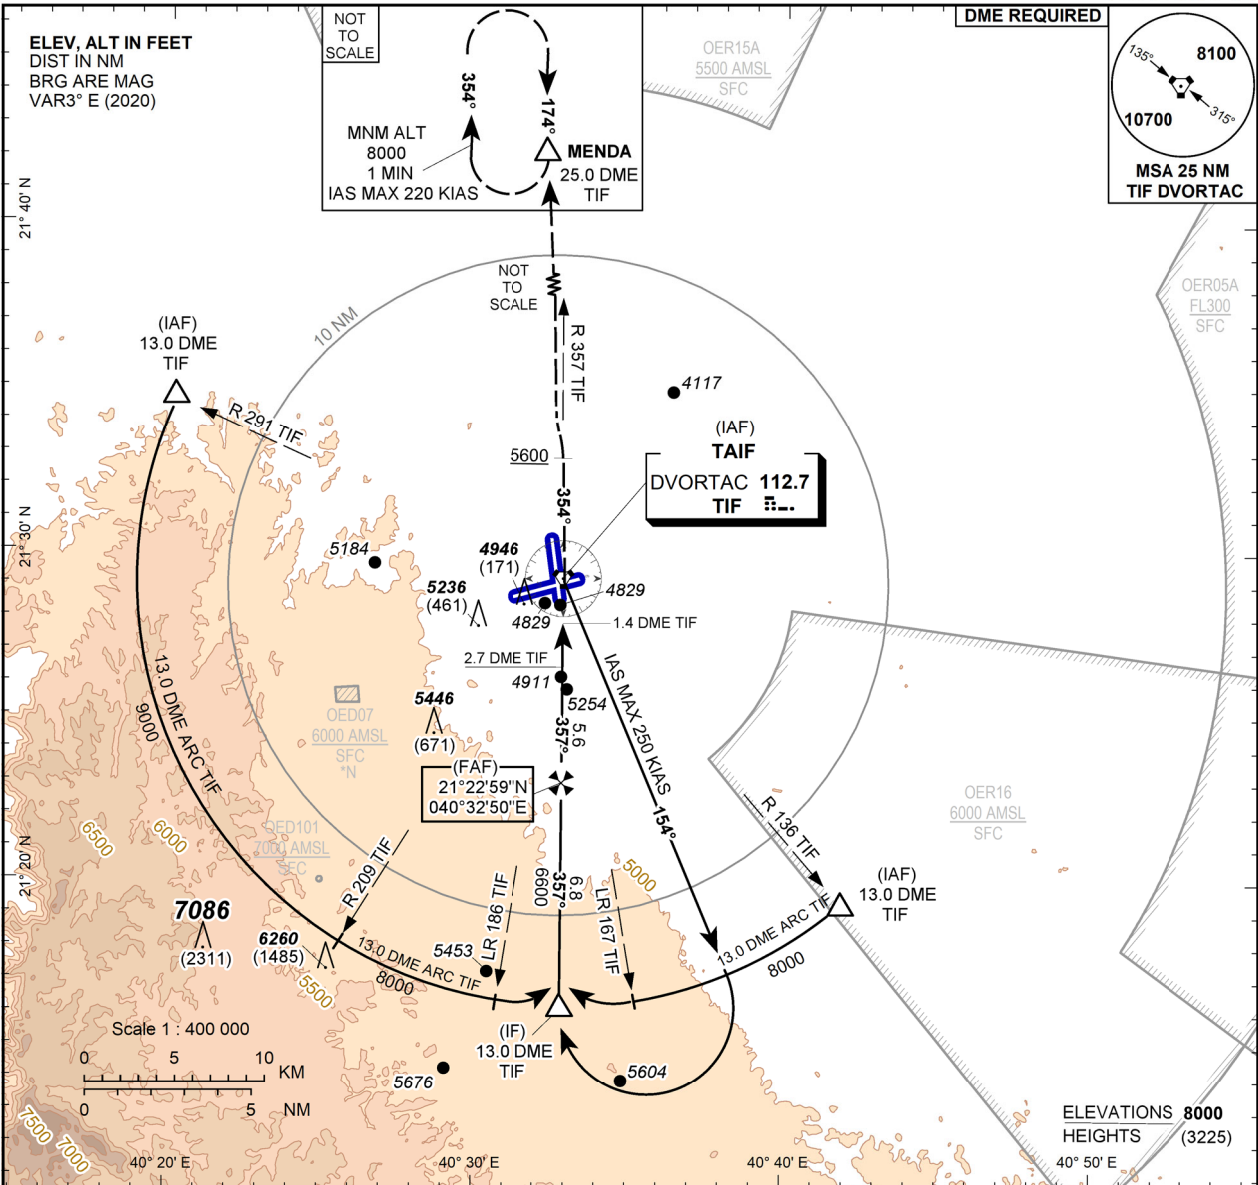


TRANSITION ALT 13000
TRANSITION LEVEL FL150

MISSED APPROACH

Climb to 8000 FT, on RDL 357 TIF until passing 5600 FT then turn left to join and follow RDL 354 TIF to MENDA and hold.

THR ELEV 4775

NM to/from THR RWY 35

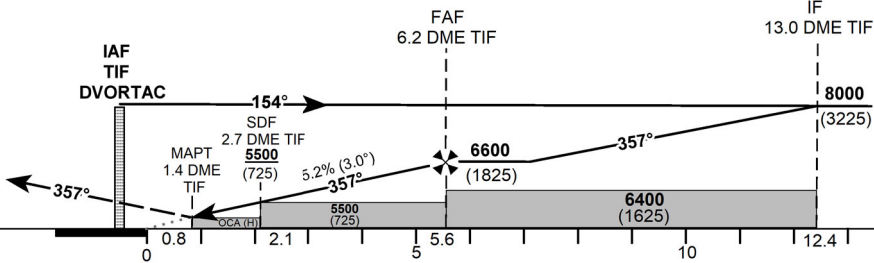

		A/C CAT	A	B	C	D										
Straight-in Approach	VOR WITH SDF	OCA(H)	5340 (565)				GND SPEED		Knots	70	90	110	130	150	170	190
		RVR(m)	2200				FAF-MAPT 4.8 NM		min:s	4:08	3:13	2:38	2:14	1:56	1:42	1:31
	VOR WITHOUT SDF	OCA(H)	5500 (725)				Rate of Descent		ft/min	370	480	580	690	800	900	1010
		RVR(m)	3000				DME TIF NM			3	4	5	6			
Circling		OCA(H)	5580 (732)	5720 (872)	5860 (1012)		ALT (HGT) 5.2% APCH			5590 (815)	5910 (1135)	6220 (1445)	6540 (1765)			
		VIS(m)	3400	4000	4900											

- CIRCLING CAT D NOT AUTHORIZED BETWEEN RWY 07 AND RWY 35 CCW WHEN OED07 IS ACTIVE.
- RVR/VIS Related MDA (H) = OCA (H)