INSTRUMENT APPROACH CHART - ICAO

TOWER 118.500

BRYANSK, RUSSIA
BRYANSK
ILS Y, LOC Y RWY 34

TRANSITION LEVEL: ❶
TRANSITION ALTITUDE: 5000 '

AD ELEV: 665 '/203m
THR ELEV: 644 '/196.5m

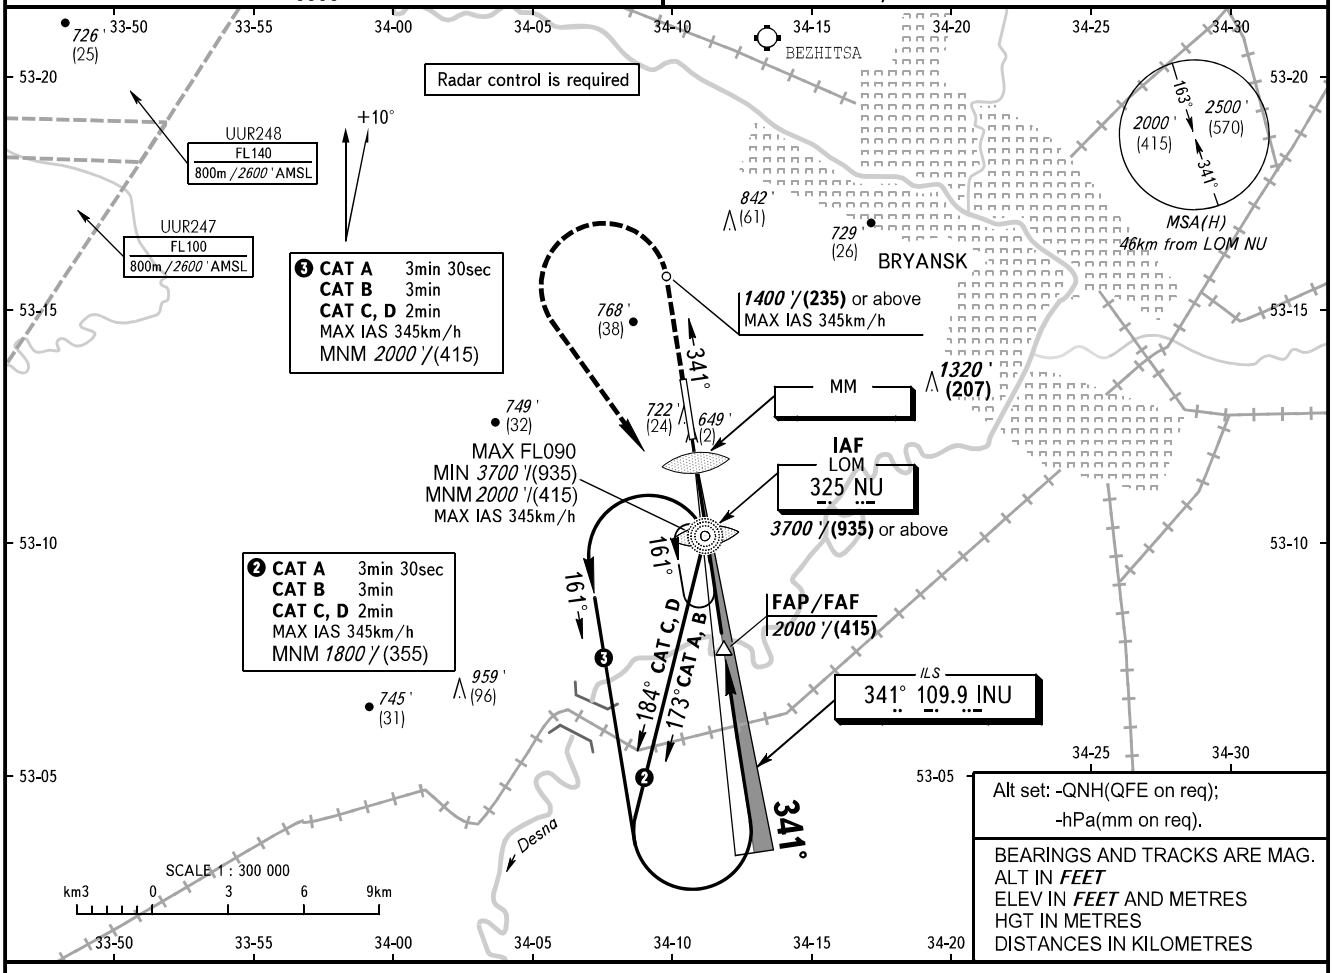

MISSED APPROACH
Climb straight ahead to 1400 '/(235) or above, then turn LEFT to LOM NU climbing to 2000 '/(415) or above.

FAF is fixed by TAR (DIST 9.8)

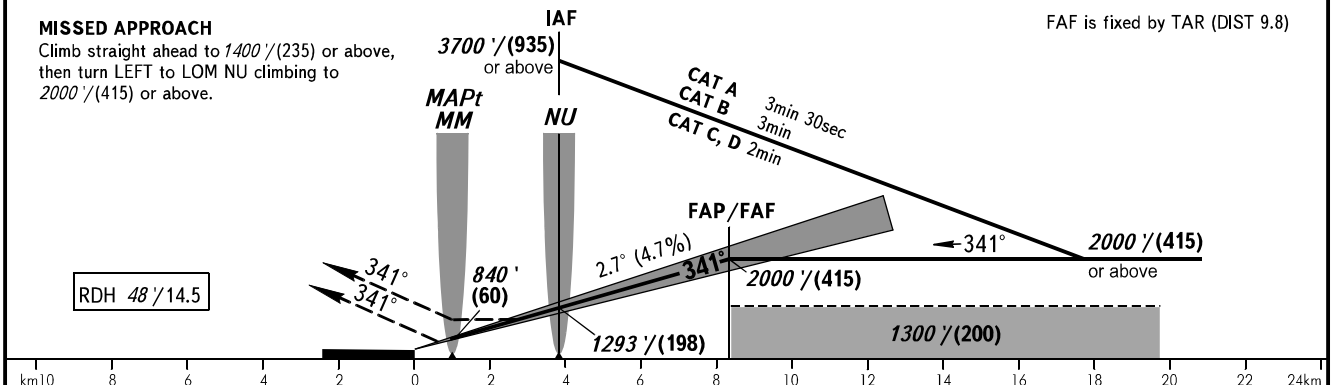

OCA(H)		A	B	C	D
Straight-in Approach	CAT I	791 '(148 ') (45)	800 '(157 ') (48)	810 '(167 ') (51)	822 '(179 ') (55)
	LOC	960 '(320 ') (100)	960 '(320 ') (100)	960 '(320 ') (100)	960 '(320 ') (100)
Circling		1140 '(470 ') (145)	1160 '(500 ') (155)	1240 '(580 ') (180)	1720 '(1050 ') (325)

❶ TRANSITION LEVEL:
- FL060 when QNH is 1013 hPa (760mm mercury column) or above;
- FL070 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL080 when QNH is less than 977 hPa (733mm mercury column).

NOTE:
1. MAPt at MM. Timing not authorized for defining MAPt.
2. Turn before passing MAPt is PROHIBITED.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390
RATE OF DESCENT	m/s	2.0	2.4	2.7	3.1	3.5	3.9	4.3	4.7	5.2
	ft/min	385	463	540	617	694	771	848	925	1002

CHANGE: Heading, UUR419 withdrawn