


TRANSITION ALTITUDE
8000 ft

ATIS 127.055
TWR 125.425
ANDRAVIDA APP 121.125

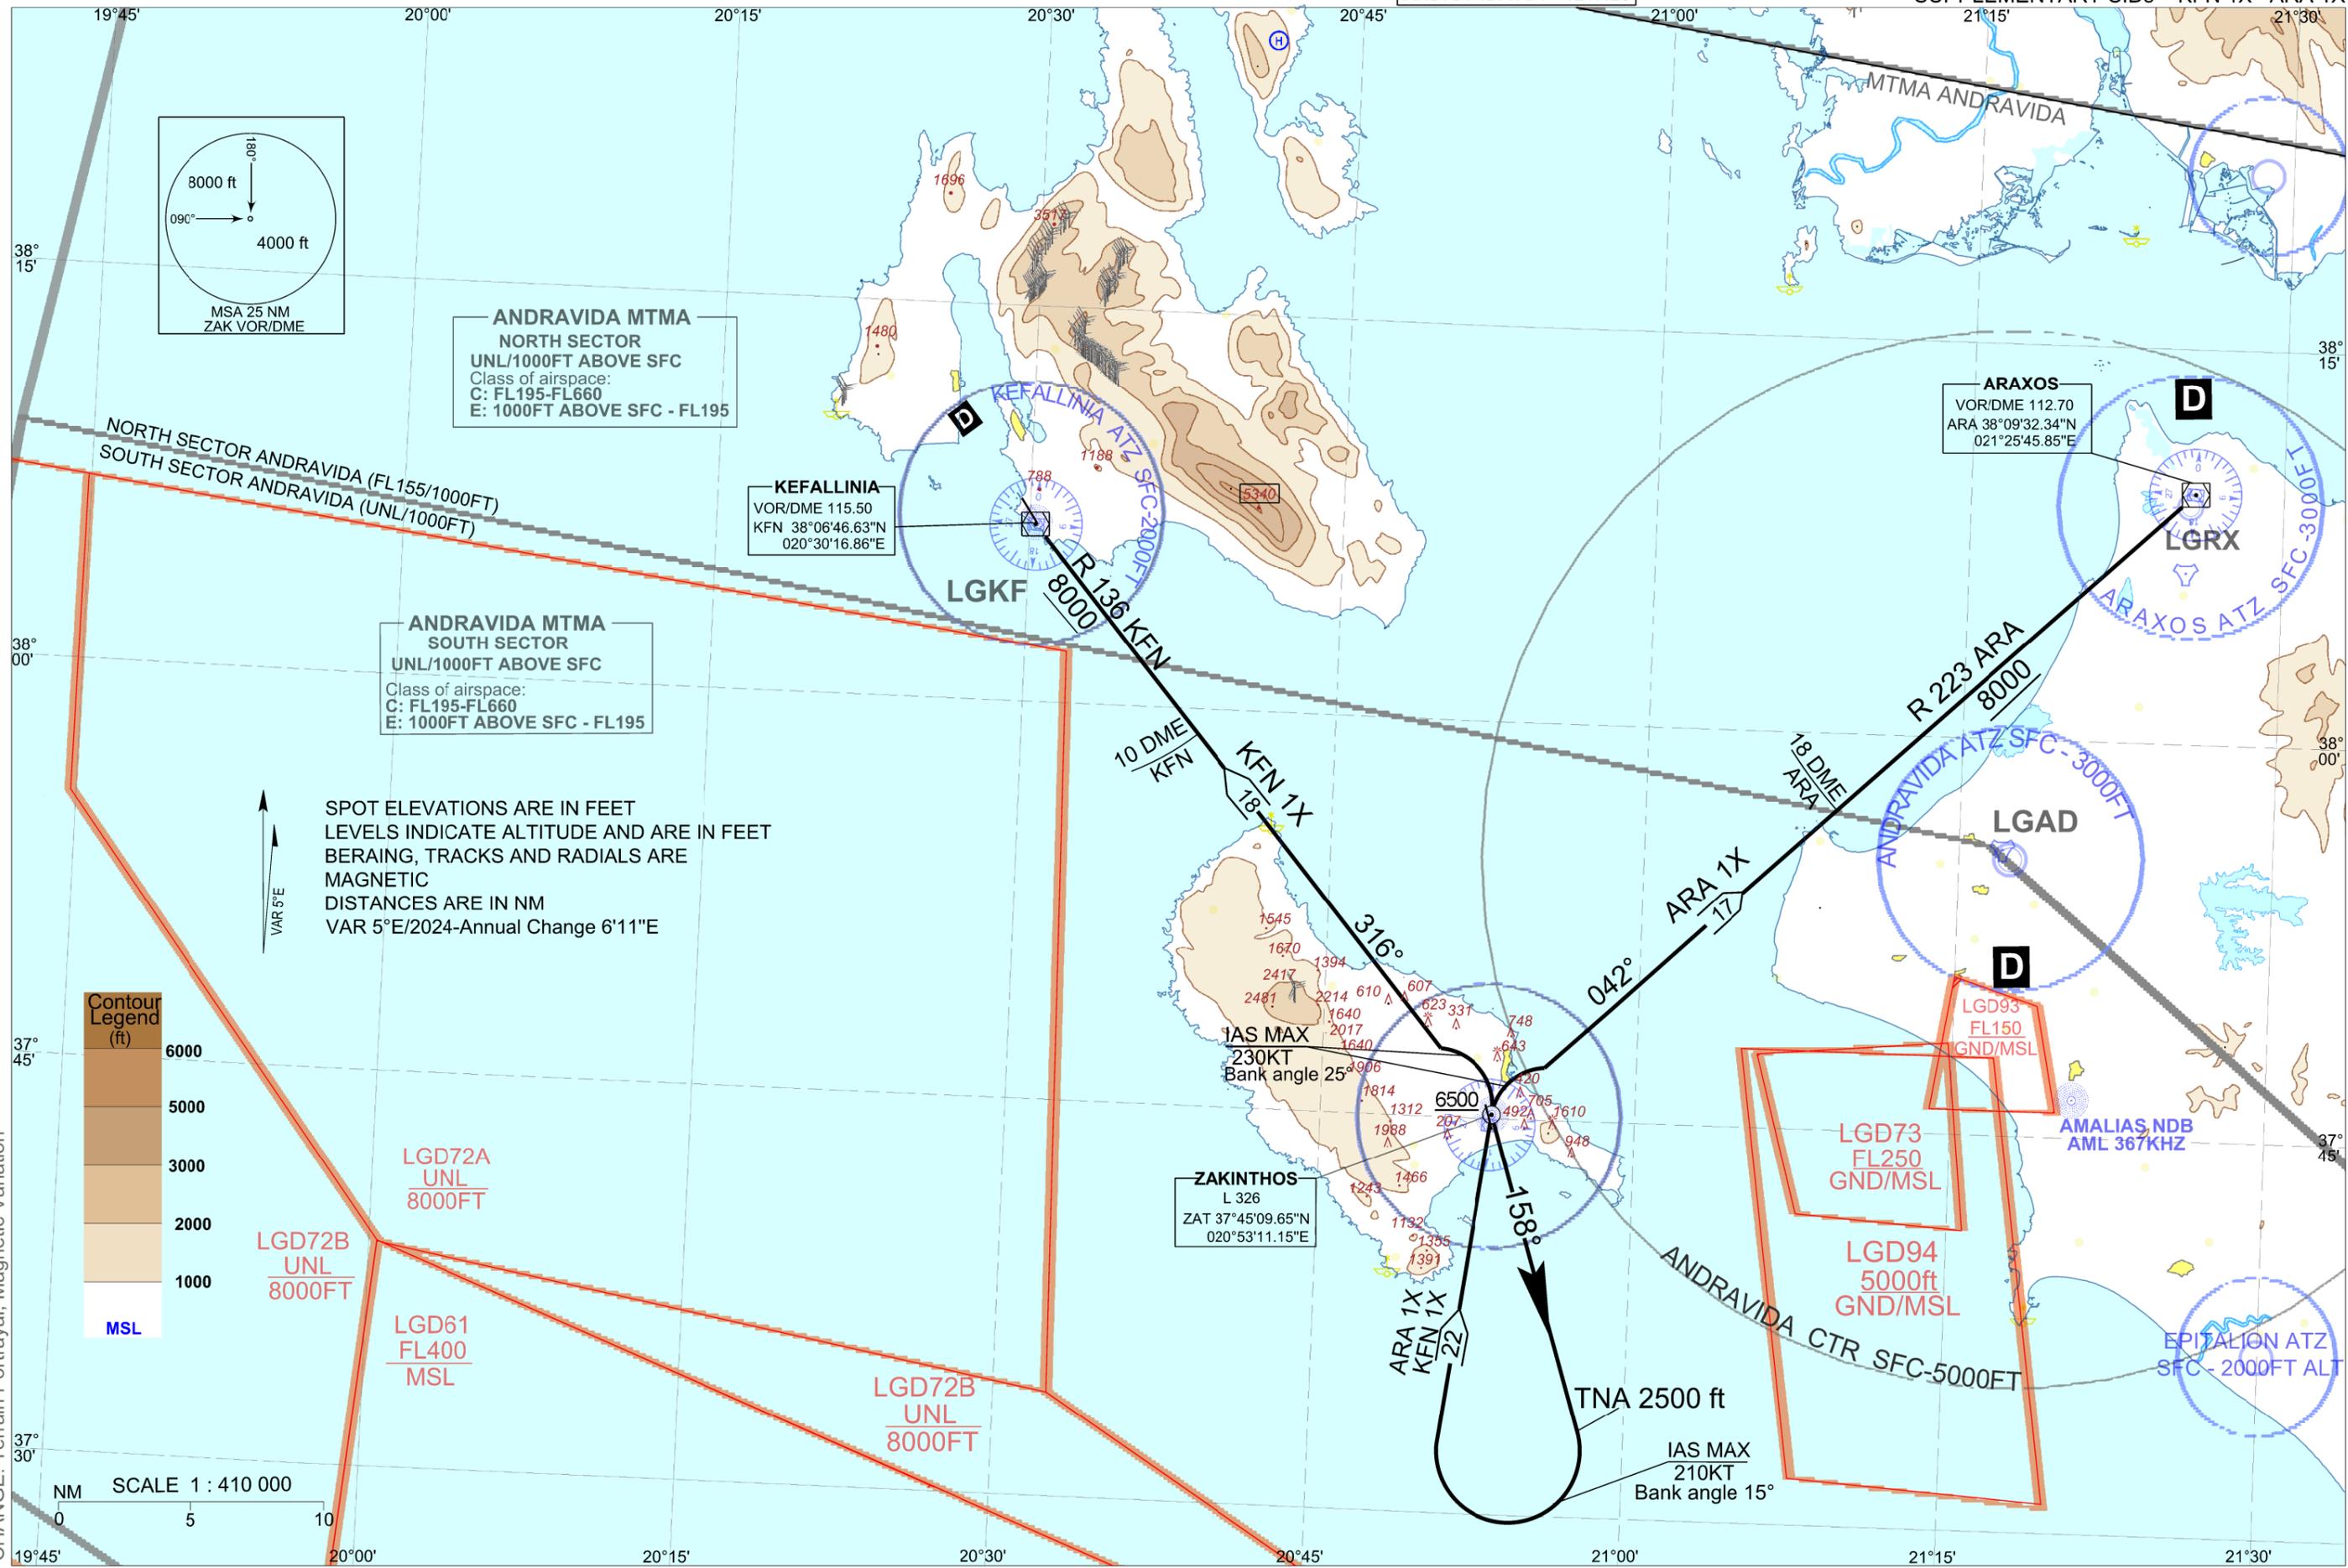


ANDRAVIDA MTMA
NORTH SECTOR
UNL/1000FT ABOVE SFC
Class of airspace:
C: FL195-FL660
E: 1000FT ABOVE SFC - FL195

KEFALLINIA
VOR/DME 115.50
KFN 38°06'46.63"N
020°30'16.86"E

ARAXOS
VOR/DME 112.70
ARA 38°09'32.34"N
021°25'45.85"E

ANDRAVIDA MTMA
SOUTH SECTOR
UNL/1000FT ABOVE SFC
Class of airspace:
C: FL195-FL660
E: 1000FT ABOVE SFC - FL195

SPOT ELEVATIONS ARE IN FEET
LEVELS INDICATE ALTITUDE AND ARE IN FEET
BEARING, TRACKS AND RADIALS ARE
MAGNETIC
DISTANCES ARE IN NM
VAR 5°E/2024-Annual Change 6'11"E

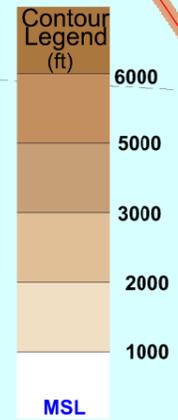

ZAKINTHOS / DIONISIOS SOLOMOS
SIDs RWY 16
ZAT L/DME

GENERAL

1. For these SIDs a visual climb up to 200 FT is required.
2. When for these SIDs an altitude higher than the transition altitude is designated, then the ATC unit shall specify an equivalent Flight Level.

DESIGNATOR	DESCRIPTION	MAX IAS / BANK ANGLE	MINIMUM CLIMB GRADIENT (PDG)	ALTITUDES
KFN 1X	Climb on BEARING 158°. At 2500 FT (QNH) turn right to ZAT, then turn left, intercept and follow BEARING 316°, then intercept and follow RADIAL 136 KFN and then to assigned route by ATC unit.	210 KT/15° until the turn 2500 FT (QNH) is completed 230 KT/25° until the turn at ZAT is completed	3,6% (219 FT/NM) up to 2500 FT (QNH). See NOTE below	Cross ZAT at 6500FT (QNH) or above. Cross RADIAL 136 KFN/10DME Fix at 8000FT (QNH) or above.
ARA 1X	Climb on BEARING 158°. At 2500 FT (QNH) turn right to ZAT, then turn right, intercept and follow BEARING 042°, then intercept and follow RADIAL 223 ARA and then to assigned route by ATC unit.	210 KT/15° until the turn 2500 FT (QNH) is completed 230 KT/25° until the turn at ZAT is completed	3,6% (219 FT/NM) up to 2500 FT (QNH). See NOTE below	Cross ZAT at 6500FT (QNH) or above. Cross RADIAL 223 ARA/18DME Fix at 8000 FT (QNH) or above.

NOTE

PDG	GS (KT)	100	120	140	160	180	200	220	240	260	280
3,6% (219 FT/NM)	ROC (FT/MIN)	365	438	511	584	657	730	803	876	949	1022