INSTRUMENT APPROACH CHART - ICAO

RADAR	**126.100**
START	**118.200**

TYUMEN, RUSSIA
ROSHCHINO
ILS Y CAT I RWY 30

TRANSITION LEVEL:	❶	AD ELEV:	*378 '*/**115m**
TRANSITION ALT:	*3000 '*	THR ELEV:	*345 '*/**105.0m**

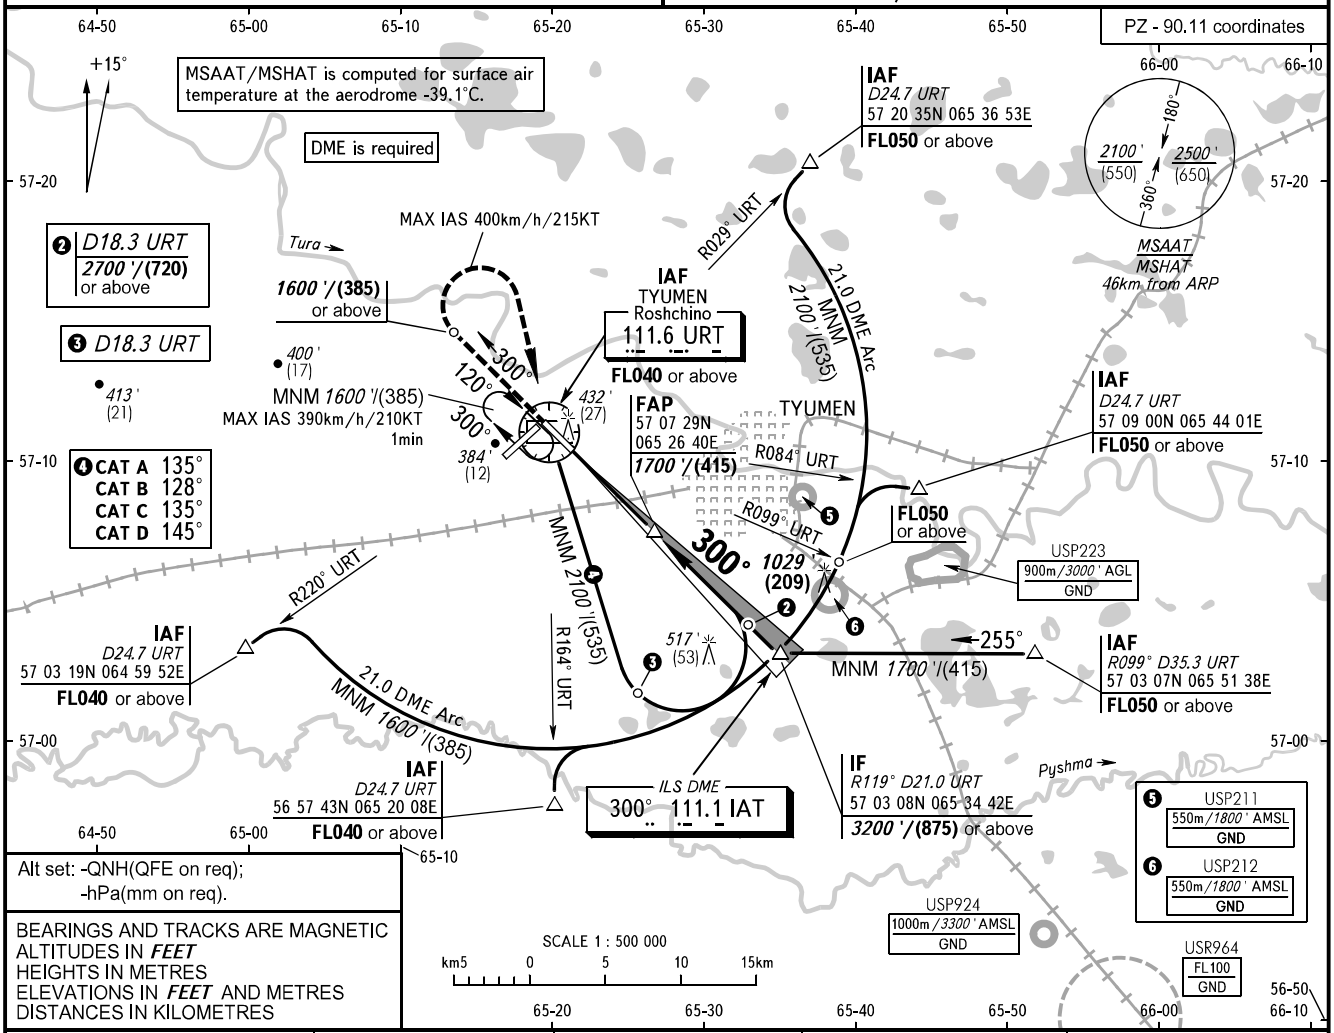

Alt set: -QNH(QFE on req);
-hPa(mm on req).

BEARINGS AND TRACKS ARE MAGNETIC
ALTITUDES IN ***FEET***
HEIGHTS IN METRES
ELEVATIONS IN ***FEET*** AND METRES
DISTANCES IN KILOMETRES

DME IAT	2.0	4.0	6.0	7.0
ALTITUDE	*739 '*	*1080 '*	*1421 '*	*1593 '*

MISSED APPROACH

Climb on track 300° to *1600 '*/(385) or above, then turn RIGHT to VORDME URT climbing to FL040 or above, then according to chart or to the holding area.

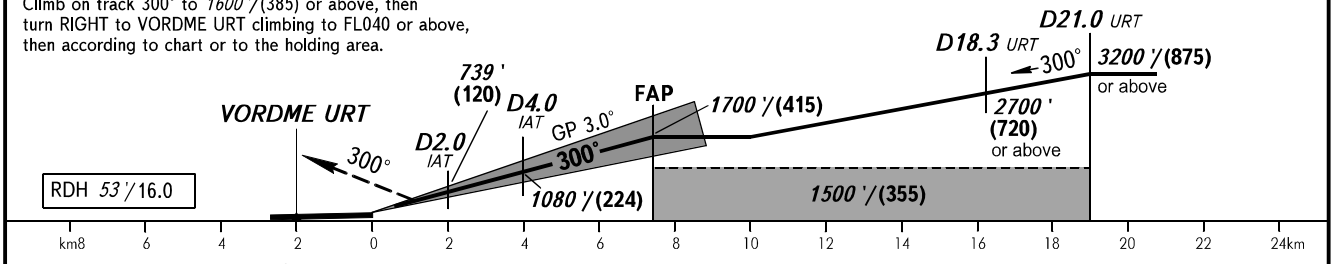

OCA(H)		A	B	C	D
Straight-in Approach	**CAT I**	*523 '(178 ')* (55)	*535 '(190 ')* (58)	*580 '(235 ')* (72)	*592 '(245 ')* (76)
Circling		*780 '(410 ')* (125)	*870 '(500 ')* (150)	*970 '(600 ')* (185)	*1070 '(690 ')* (215)

❶ TRANSITION LEVEL:
- FL040 when QNH is 1013 hPa (760mm mercury column) or above;
- FL050 when QNH is 977 hPa (733mm mercury column) or above, but less than 1013 hPa (760mm mercury column);
- FL060 when QNH is less than 977 hPa (733mm mercury column).

WARNING
Zero range of DME IAT is indicated at RWY 30 THR.

GROUND SPEED	km/h	150	180	210	240	270	300	330	360	390	420	450
RATE OF DESCENT	m/s	2.2	2.6	3.1	3.5	3.9	4.4	4.8	5.2	5.7	6.1	6.6
	ft/min	433	512	610	689	768	866	945	1024	1122	1201	1299

CHANGE: New chart