


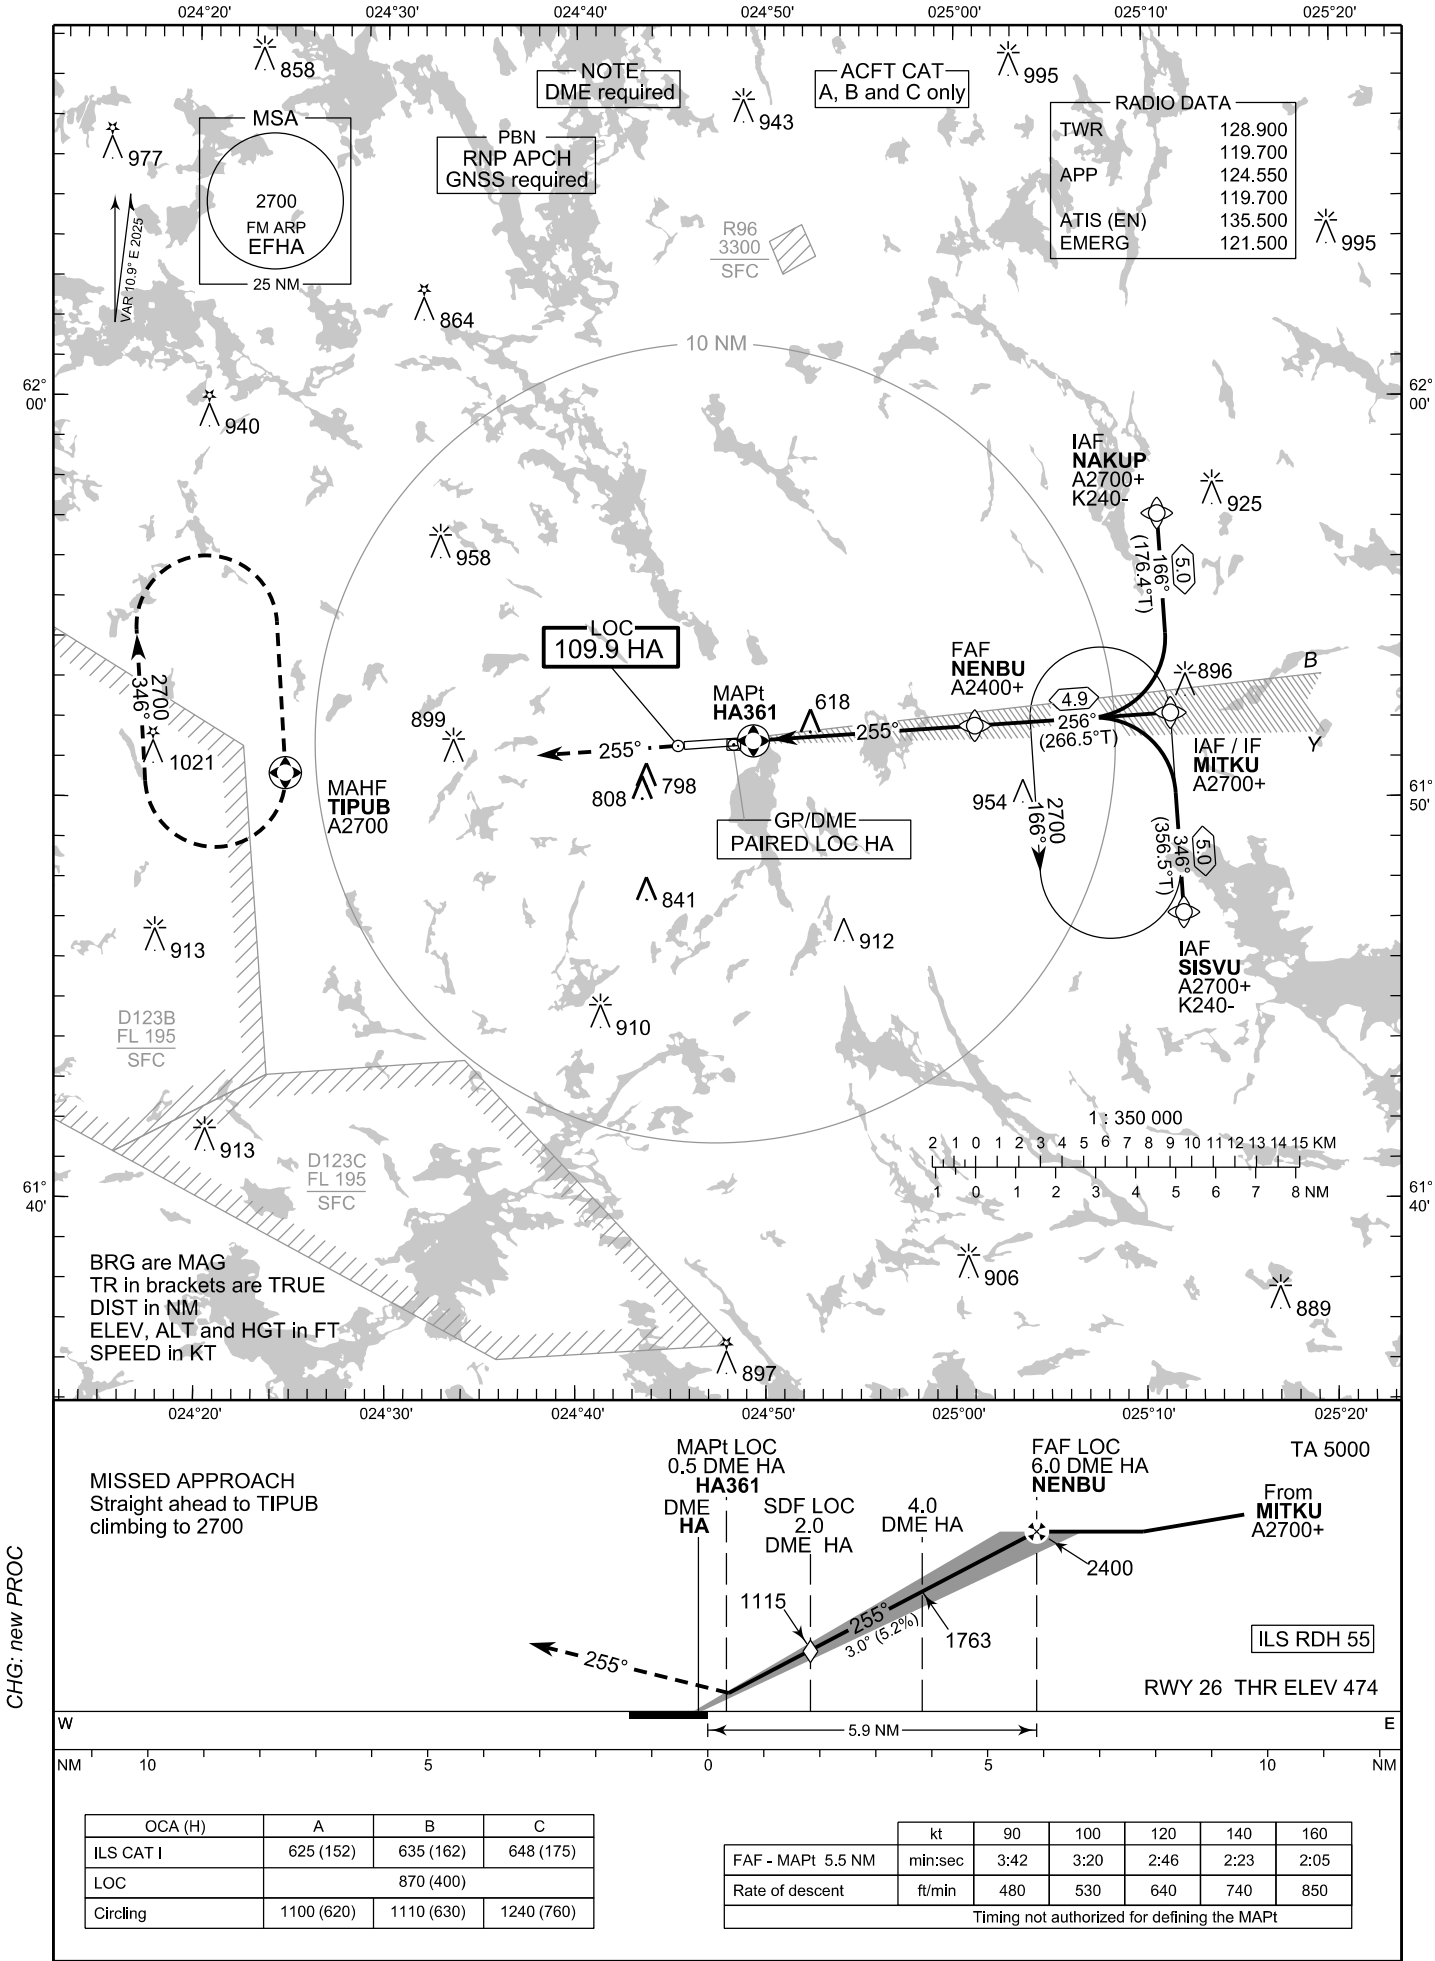

EFHA ILS or LOC RWY 26										
PROC ID NAV SPEC	SEQ NR	P/T	WPT			MAG	GEO TR	DIST NM	Constraints	
			ID	Type	Flyover				LVL	Speed
I26 SISVU RNP APCH	005	IF	SISVU	IAF	-	346°	356.5°T	5.0	A2700+	K240-
	010	TF	MITKU	IF	-				A2700+	
	020	TF	NENBU	FAF LOC	-	256°	266.5°T	4.9	A2400+	
	030	TF	HA361	MAPt LOC	Y	255°	265.9°T	-	A1000+	
	040	CA	-	-	-					
	050	DF	TIPUB	MAHF	Y	-	-	-	A2700	

EFHA ILS or LOC RWY 26										
PROC ID NAV SPEC	SEQ NR	P/T	WPT			MAG	GEO TR	DIST NM	Constraints	
			ID	Type	Flyover				LVL	Speed
I26 MITKU RNP APCH	010	IF	MITKU	IAF/IF	-	256°	266.5°T	4.9	A2700+	
	020	TF	NENBU	FAF LOC	-				A2400+	
	030	TF	HA361	MAPt LOC	Y	255°	265.9°T	-	A1000+	
	040	CA	-	-	-					
	050	DF	TIPUB	MAHF	Y	-	-	-	A2700	

EFHA ILS or LOC RWY 26										
PROC ID NAV SPEC	SEQ NR	P/T	WPT			MAG	GEO TR	DIST NM	Constraints	
			ID	Type	Flyover				LVL	Speed
I26 NAKUP RNP APCH	005	IF	NAKUP	IAF	-	166°	176.4°T	5.0	A2700+	K240-
	010	TF	MITKU	IF	-				A2700+	
	020	TF	NENBU	FAF LOC	-	256°	266.5°T	4.9	A2400+	
	030	TF	HA361	MAPt LOC	Y	255°	265.9°T	-	A1000+	
	040	CA	-	-	-					
	050	DF	TIPUB	MAHF	Y	-	-	-	A2700	

RNAV Holdings							
ID	INBD TR	INBD MAG	Turn Direction	Speed	MNM HLDG LVL	TIME	DIST NM
MITKU	356.5°T	346°	Left	K230-	A2700	1 MIN	-
TIPUB	176.4°T	166°	Right	K230-	A2700	1 MIN	-

WPT COORD
SEE PAGE EFHA AD 2.15 - 1

FINAL APPROACH PARAMETERS			
LOC Gradient	ILS		RDH
	CAT	GPA	
5.24 % (3.00°)	I	3.00°	55 FT